
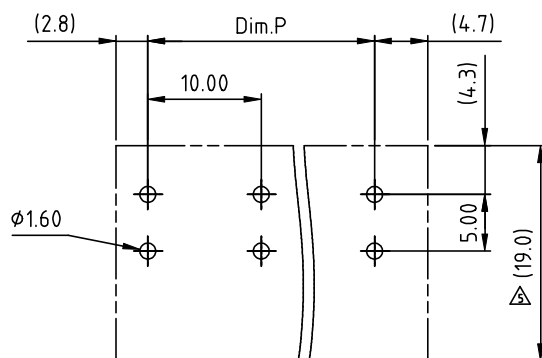
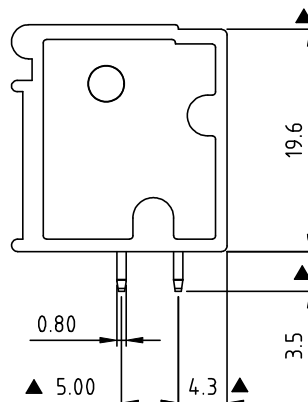
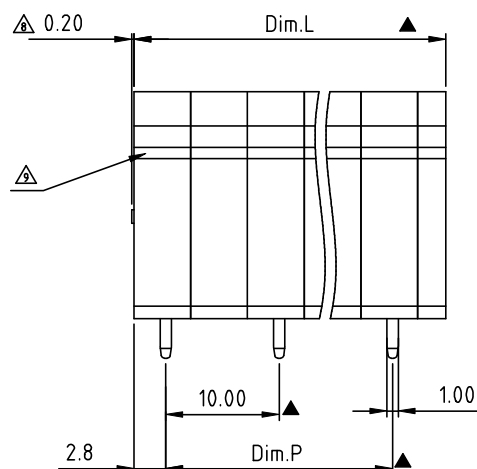
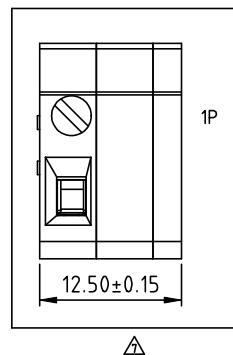


RoHS Compliant

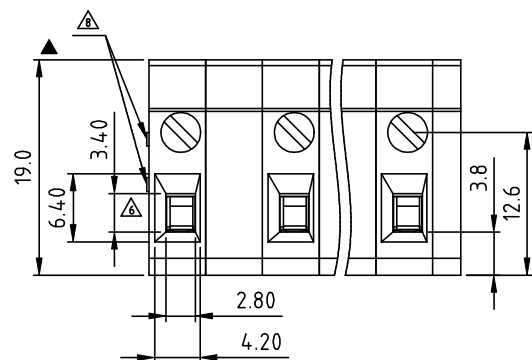

P.C.B LAYOUT

N=Number of Poles

Dim.L=Nx10.0-2.5

Dim.P=(N-1)x10.0

pole	1P	2P-4P	5P-8P	9P-12P
Dim.L	12.5±0.15	±0.20	±0.30	±0.40
Dim.P		±0.20	±0.30	±0.40

△

REV	SIGN	DATE	DESCRIPTION	APPROVER
D	△	11.01'05	Standard spec is changed.	Marivn
E	△	02/01'07	Soldering temperature is changed from 245°C to 250°C	Marivn
F	△	08/20'09	Operating temperature is changed from -30~105°C to -40~115°C	Kind
F	△	08/20'09	drawing code changed.	Kind
G	△	08/25'10	Dim 15.2 TO 19.0	Tason
H	△	03/29'10	The wire inlet is changed.	Tason
I	△	2018.04.19	Through TUV certification and Update the drawing	Zia
J	△	2018.07.10	Add two cylinder	Chen Bo
J	△	2018.07.10	Change the view	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item Terminal body: steel stamping clamp Zinc plating
- Item Terminal screw: Steel Zinc plating "-" slot type
- Item Solder pin: Brass, Tin plated
- Item Firm wire chunk: steel Zinc plating
- Item Terminal housing: Thermoplastic (UL94V-0)
- Item Terminal cover: Thermoplastic (UL94V-0)

△ △ Electrical cULus TUV

- Voltage rating: 300VAC / 300VAC
- Current rating: 20A / 32A
- Wire range: 0.34-4.0mm²
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 2.4
- Screw: M2.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus TUV
- Critical dimension: △

TR xx 15 x 0 xxxx G

COLOR

△ 01	1Pole	0 Black (RAL9005)	0000: "@" Logo
02	2Poles	2 Red (RAL3001/D)	000A: "ANYTEK" Logo
03	3Poles	3 Orange(RAL2011/P)	Any special item by
...	...	4 Yellow(RAL1018/A)	customer request.
12	12Poles	5 Green(RAL6018/T)	please contact sales
		6 Blue (RAL5015/A)	department.
		8 Grey(RAL7035/D)	
		C Green(RAL 6018/U)	

G RoHS compliant
(lead<4%)
In copper Alloy**Amphenol**
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TR 10.0 Series Vertical (90D wire inlet)					
PART NO.	TRxx15x0xxxxG			DWG NO.	8TR0302 △	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Chen Bo 07/10-18	Chen Bo 07/10-18		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	X.XX ±0.10
					REV.: J	X° ±1°