

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/10/17'	~	

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- 1.4 CURRENT RATING:1.5A.
- 1.5 VOLTAGE RATING:125V AC RMS.

2. ENVIRONMENT CHARACTERISTICS:

- 2.1 TEMPERATURE: -40°C~+85°C.

3. MATERIALS

- 3.1 CONTACT MATERIAL: COPPER ALLOY, SELETIVE GOLD.
- 3.2 INSULATOR MATERIALS: PBT/PA66 BLACK.

4. PRODUCT NUMBER CODE:

DS1131-04-X X X X X X

LED & DIM A Type

- 1:LEFT(GREEN) RIGHT(YELLOW) A=3.7
- 2:LEFT(YELLOW) RIGHT(GREEN) A=3.1

Housing Materials

P:PBT
N:NYLON



Contact Plating

0:Gold Flash
3:Selective 3u" Gold Flash
(6;15;30)Micro Inch

Housing Color
B:Black

No.Of Contacts
8:8p8c

Connector Type
S:Socket

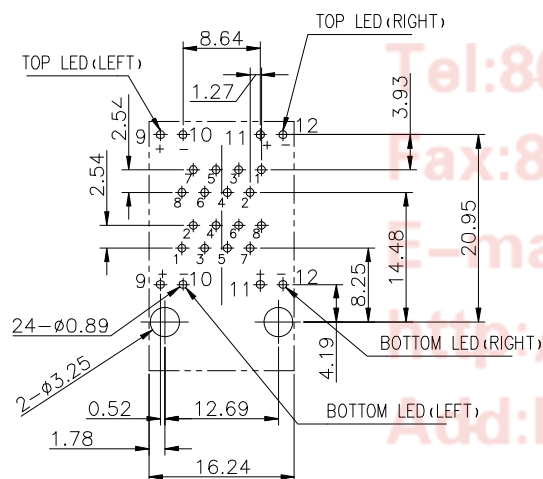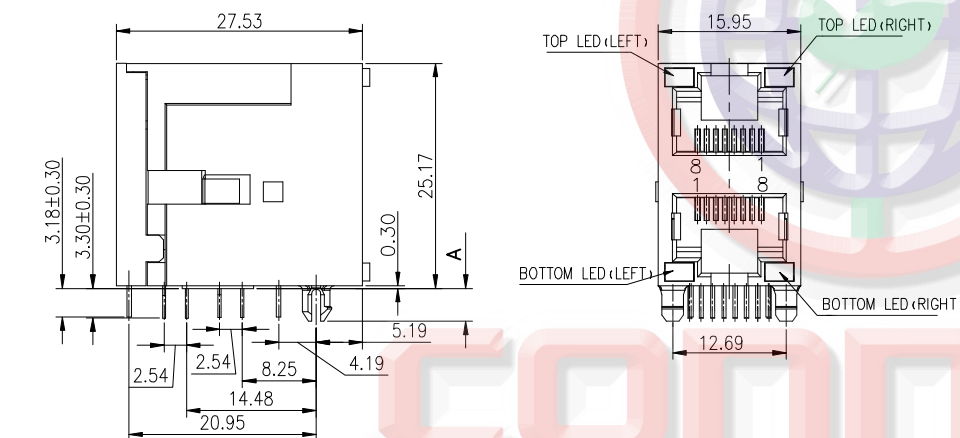

PCB LAYOUT COMPONENT SIDE
THICKNESS=1.6MM

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB Jack 8 Positions 2*1 Port		
X.	±0.60	X.	±5°	UNITS	mm		W/O Shell & LED Type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1131-04 SERIES		
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1131-04-XXXXX-A							



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD