

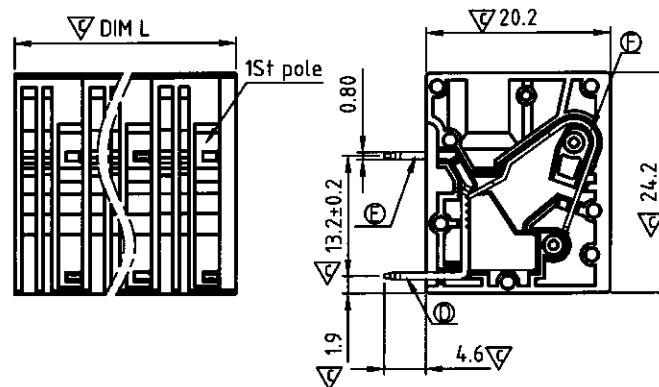


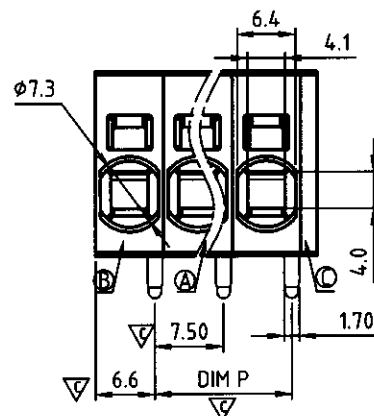

P.C.B Layout
Top view

△ N=NUMBER OF POLES

DIM		TOL		
		1P--5P	7P--11P	13P--15P
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

SIGN	DATE	DESCRIPTION	APPROVER
△	12/28'13	update the drawing	Da cheng
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal side body: Thermoplastic (UL94V-0)
- Item ③ Terminal cover: Thermoplastic (UL94V-0)
- Item ④ Contact pin: Copper, Tin Plated.
- Item ⑤ Contact pin: Copper, Tin Plated.
- Item ⑥ Spring clamp: Stainless steel

Electrical:

cULus

- Voltage rating: 300 V
- Current rating(Sol): 30 A
- Current rating(Str): 35 A
- Solid wire(AWG): 10-24
- Stranded wire(AWG): 8-24
- Wire strip length: 15-16 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +120°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension:

NK xx A 1 x 2 xxxx G

- △ No. OF POLES
- 01: 1POLES
 - 03: 3 POLES
 - 15: 15 POLES

- Body Color
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7004/P)
 - 9 White(RAL1102)
 - C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.



ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NK 7.5mm Series Right angle (Single tail C type)(第1P为后端子侧) 第00P								
PART NO.	NKxxA1x2xxxxG			DWG NO.	8NK0006				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.					
		Da cheng 2013.12.28	Da cheng 2013.12.28		Tolerance				
					UNIT: mm	X.	±0.50		
					SCALE: NONE	X.X	±0.30		
					SHEET: 01/01		REV: C	X.XX	±0.10
								X°	±1°