
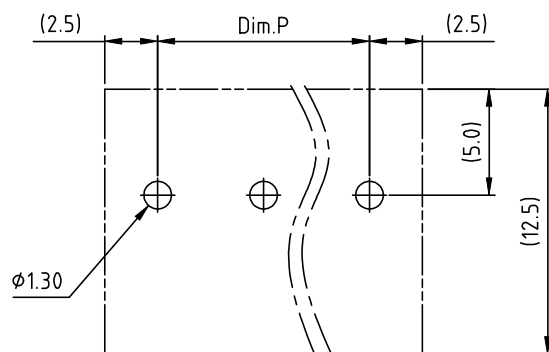
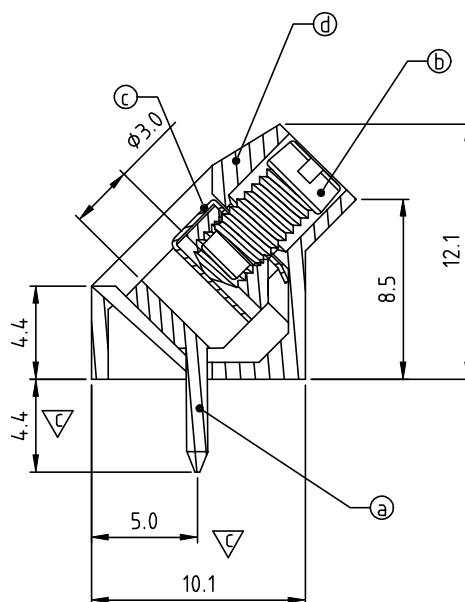


N = Number of poles

Dim L=Nx5.0

$$\text{Dim } P = (N-1) \times 5.0$$

	Dim L	Dim P
2-6p	± 0.15	± 0.10
7-12p	± 0.20	± 0.20
13-18p	± 0.30	± 0.25
19-24p	± 0.35	± 0.30

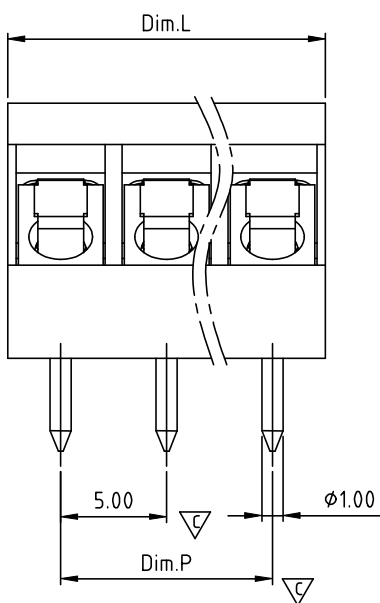

RECOMMENDED PCB LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
①			
②			
③			
④			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ④ Terminal body(metal housing): BrassBright Tin plated over Nickel plated.
- Item ⑤ Terminal screw: Steel Zinc plating “-” slot type
- Item ⑥ Wire guard :stainless steel
- Item ⑦ Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 14-22
- Stranded wire(AWG):14-22
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 260°C±5°C/5 Sec
- Critical dimension: 

TQ xx 0 1 x 0 xxxx G

POLES

02 02 POLES

03 03 POLES

...

24 24 POLES

Color

0 Black (RAL9005)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

C Green(RAL6018/U)

000 0 @ logo

000 A ANY logo

Any special item by _____

customer request,
please contact sales

please contact sales
department

department.

RoHS compliant

(lead<4%)

by In copper Alloy

ANYTEK CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD									
TITLE		TQ-5.0 SERIES SOLID BLOCK SERIES							
PART NO.		TQxx01x0xxxxG			DWG NO.		8TQ0001		
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance		
			Airy min 2015.12.21	Airy min 2015.12.21			UNIT: mm		
							SCALE: NONE		
					SHEET: 01/01		REV.: F		X. ±0.50
						X.XX ±0.10		X° ±1°	