
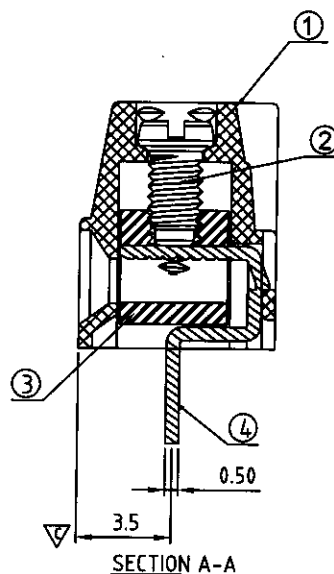
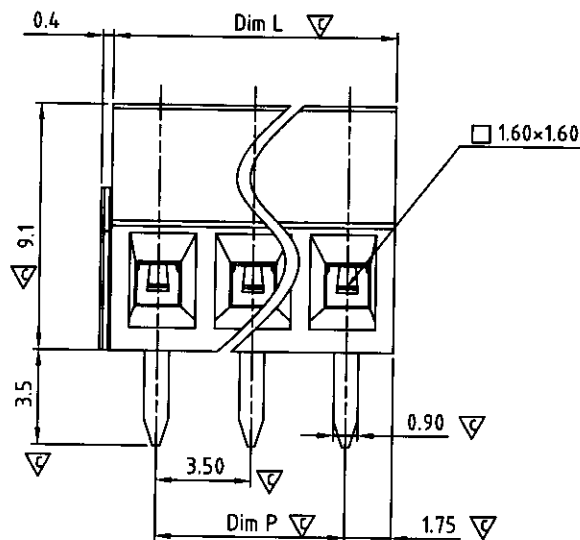
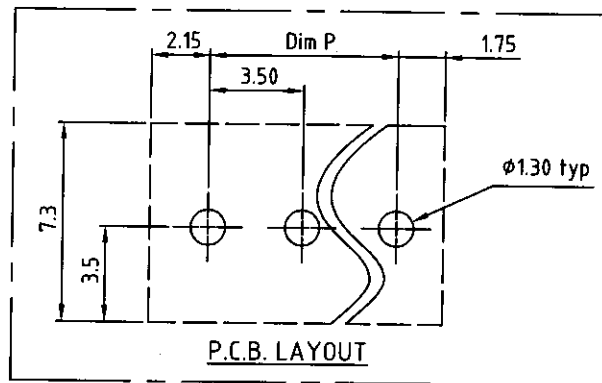


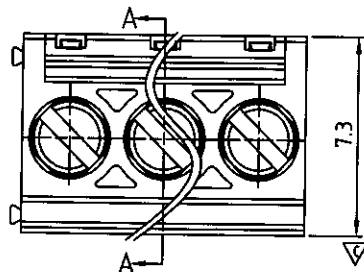

Material

- Item 1 Terminal housing : Thermoplastic (UL94V-0)
- Item 2 Terminal screw : Steel Zinc plating "-" slot type
- Item 3 Clamp : Brass, Ni plated
- Item 4 Wire guard solder pin : Brass, Tin plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▽

ER xx 01 x 0 xxxx G

- | | |
|-------------|---------------------|
| 02 2 Poles | 0 Black (RAL9005) |
| 03 3 Poles | 2 Red (RAL3001/D) |
| ... | 3 Orange(RAL2011/P) |
| 24 24 Poles | 4 Yellow(RAL1018/A) |
| | 5 Green(RAL6018/T) |
| | 6 Blue (RAL5015/A) |
| | 8 Grey(RAL7035/D) |

RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

N = Number of poles
Dim L = N x 3.50
Dim P = (N-1) x 3.50

Poles	Dim L	Dim P
2-6p	±0.15	
7-11p	±0.20	
12-16p	±0.25	
17-20p	±0.30	
21-24p	±0.40	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		ER 3.5 Series 180D (2P-24P)				INDUSTRIAL PROPERTY OF SHANTER TECHNOLOGY CO., LTD	
PART NO.	ERxx01x0xxxxG			DWG NO.	BER0002		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Runner 2012.07.26	Aaron 2010.04.06	 	UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					SHEET: 01/01		X.XX ±0.10
REV.: B				X° ±1°			