
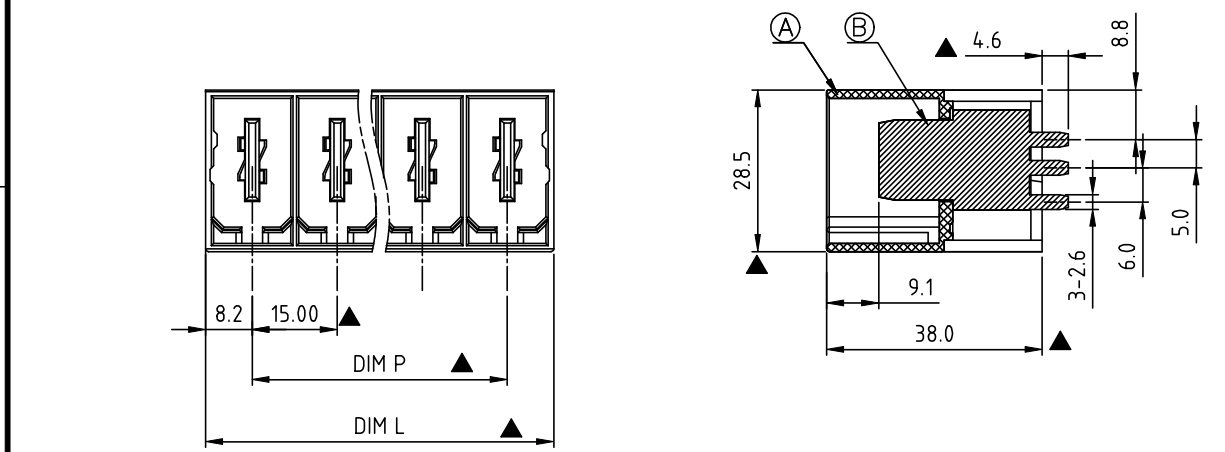


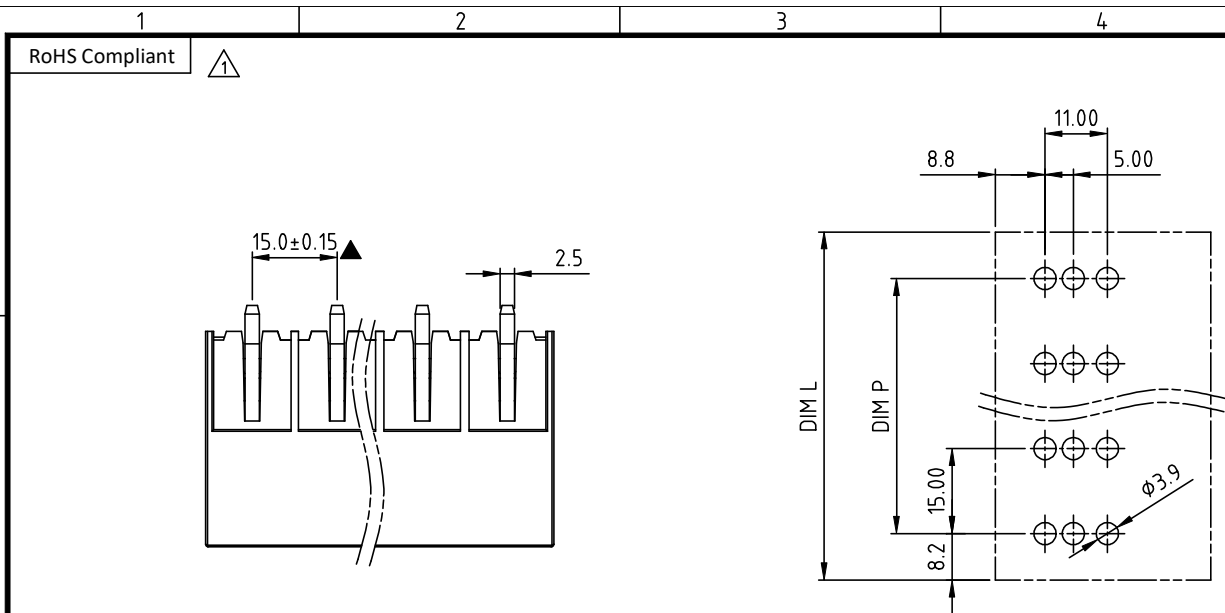

POLE	2	3	4	5	6	7	8	9	10
Dim.L	31.4	46.4	61.4	76.4	91.4	106.4	121.4	136.4	151.4
Dim.P	15.0	30.0	45.0	60.0	75.0	90.0	105.0	120.0	135.0
Tol.	±0.20			±0.35			±0.50		

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		05/03-11	Initial release	Runner
C	△	05/13-20	Add RoHS Compliant, and Amphenol Logo	Chen Bo
	△	05/13-20	Change the symbol of critical dimension	Chen Bo
	△	05/13-20	add cULus safety certification mark	Chen Bo
	△	05/13-20	add the colour code,	Chen Bo
	△	05/13-20	update the wave soldering temperature	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Terminal housing: PBT (UL94V-0)
- Item ② Male contact : Copper. Gold plated.

Electrical: cULus

- Voltage rating: 600 V
- Current rating: 115 A
- Withstanding Voltage: 2.2 KV
- Operating temperature: -40°C to +115°C
- ⑤ ● Wave soldering temperature: 260°C±5°C/5 Sec
- ③ ● APPROVAL: cULus
- ② ● Critical dimension: ▲

KU xx C 0 x 0 xxxx G

No. OF POLES
02: 2 POLES
:
10: 10 POLES

④
COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant (lead<4%)
In copper Alloy
0000: “@” Logo (Standard)
000A: “ANYTEK” Mark
Any special item by customer request.
please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE					KU 15.0mm Body Series (Vertical) without flange 2P-10P				
PART NO.			KUxxC0xxxxG		DWG NO.		8KU0006		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance				
		Chen Bo 05/13-20	Chen Bo 05/13-20		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°				
SHEET: 01/01					REV.: C				