



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 2345 MHz SMD 3.0X3.0 mm (BW=90MHz)

TST Part No.: TA0581B

Customer Part No.: _____

Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Anne Chen 

Approved by: _____ Bob Chau 

Date: _____ 02, 04, 2015

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 2345MHz

MODEL NO.:TA0581B

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 5 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering


Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.	Note
Center Frequency F_c	MHz	-	2345	-	-
Insertion Loss (2300 ~ 2390 MHz) IL	dB	-	2.8	4	-
Amplitude Ripple (2300 ~ 2390 MHz)	dB	-	1.5	2.5	-
VSWR (2300 ~ 2390 MHz)		-	1.8	2.5	-
Group delay ripple (2300 ~ 2390 MHz)	ns	-	8	50	-
Relative Attenuation (relative to 0 dB)					
D.C. ~ 2200 MHz	dB	23	30	-	-
2500 ~ 4000 MHz	dB	25	34	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

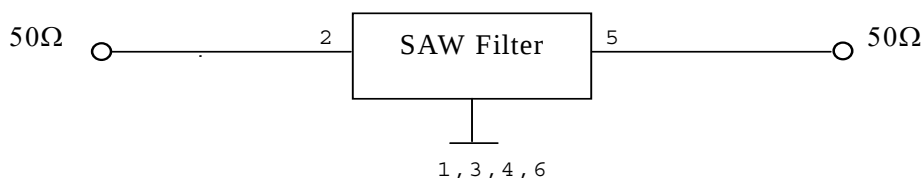


D.OUTLINE DRAWING:

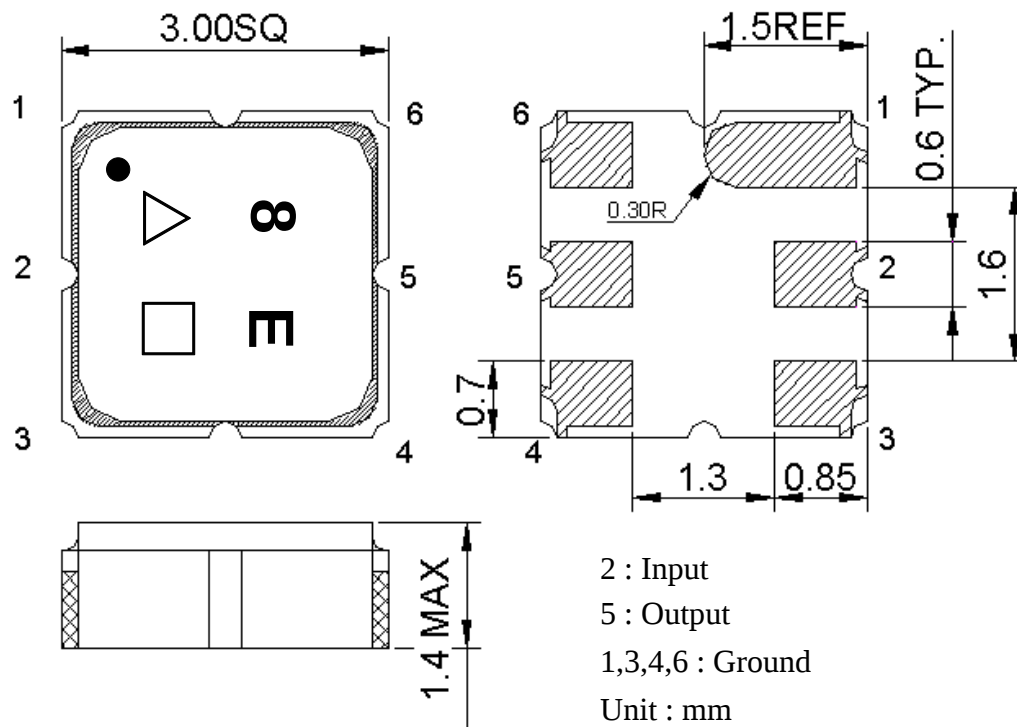



△ : Year Code (2009->9, 2010->0,..., 2018->8)

□ : Date Code (W01->A,W02->B,...W27->a,...,W52->z)

E. PCB Footprint:


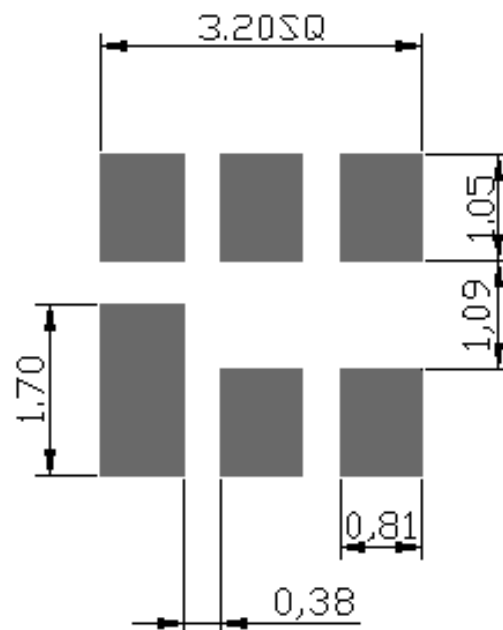


F. Frequency Characteristics :

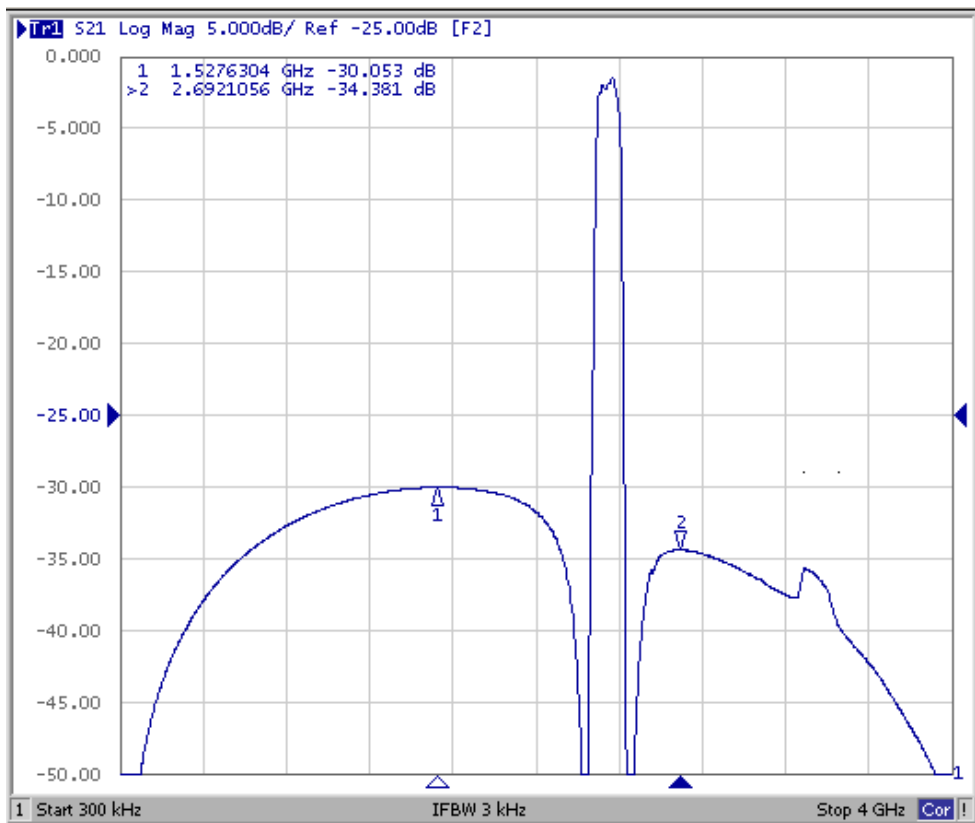
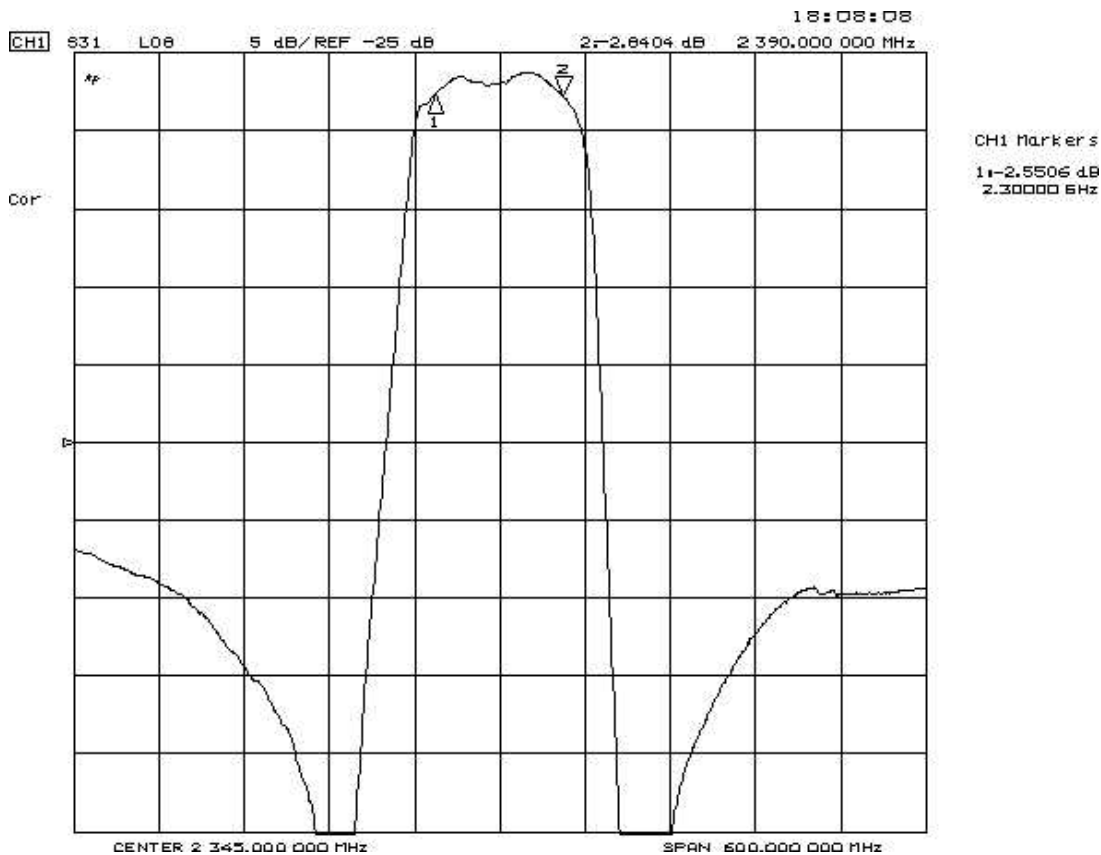


Reflections Functions :


S11 VSWR

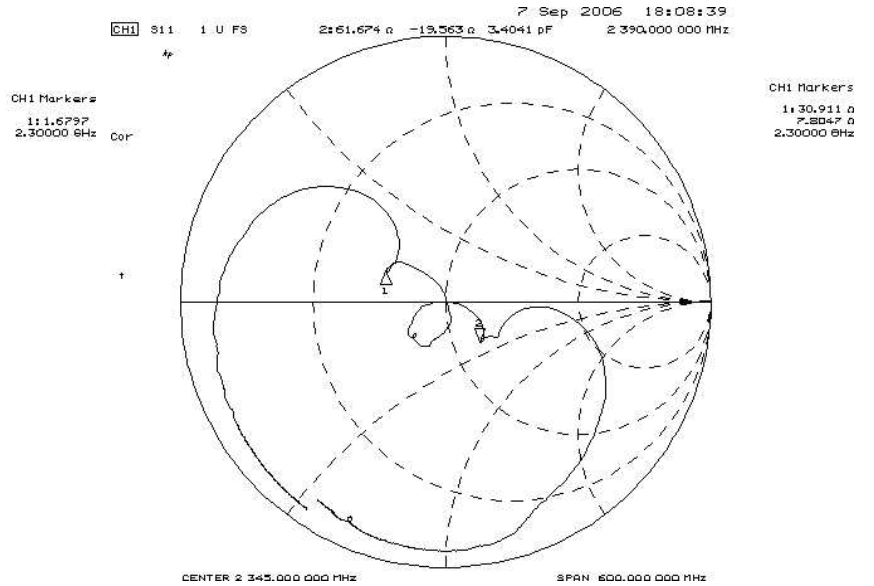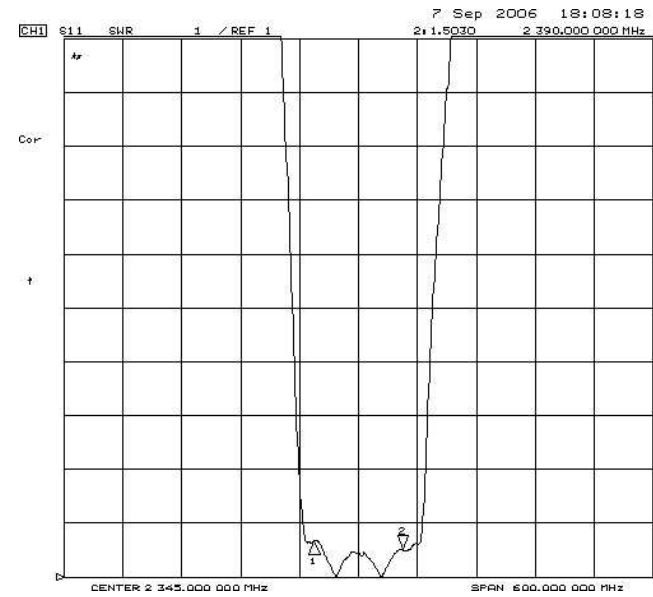

S22 VSWR

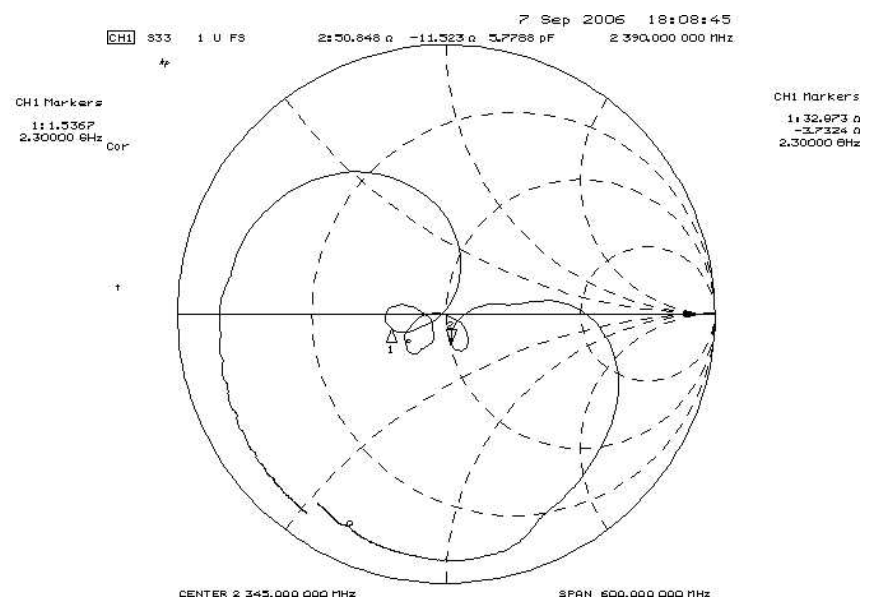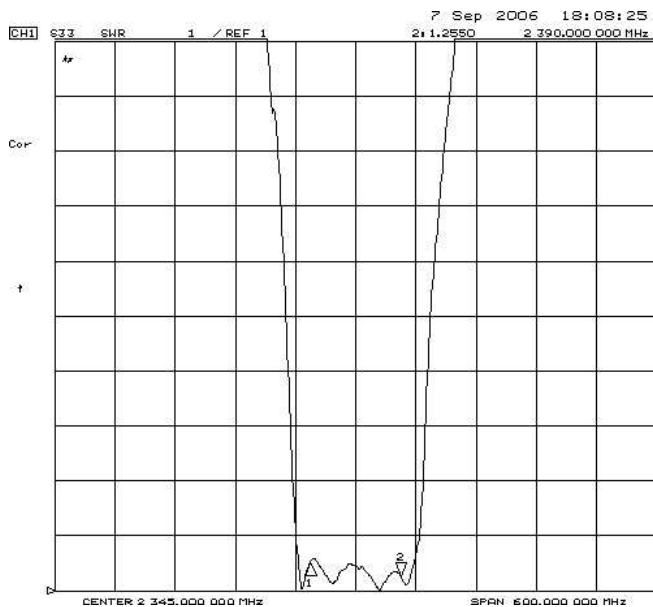


Group Delay :

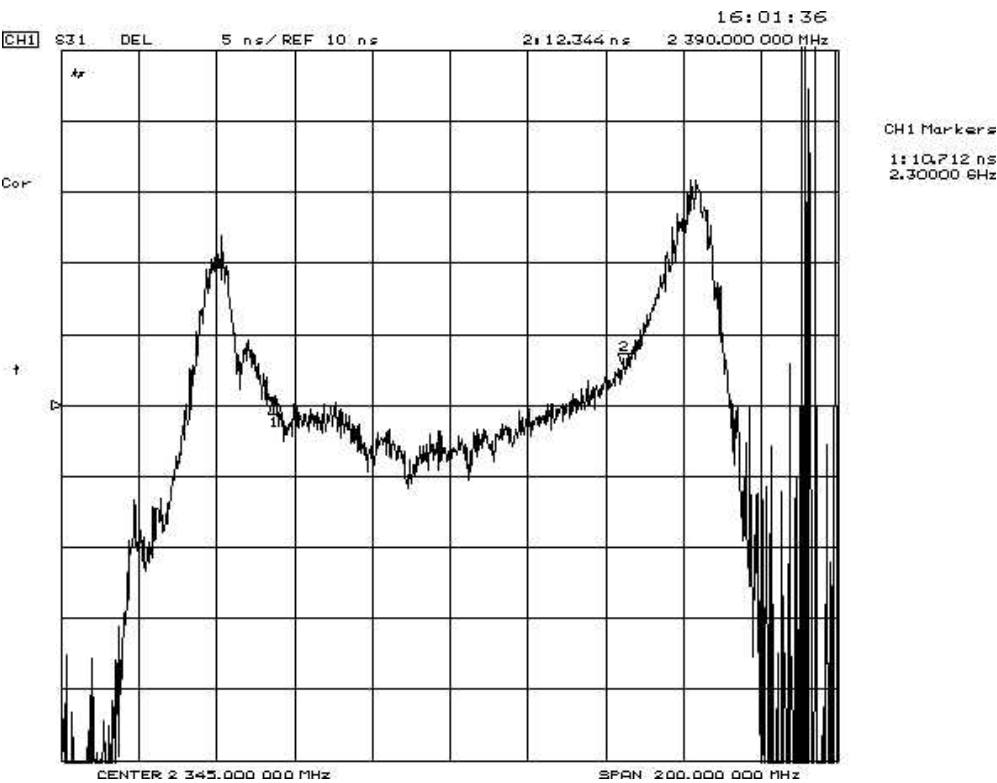


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=1000 ; 13"=3000)

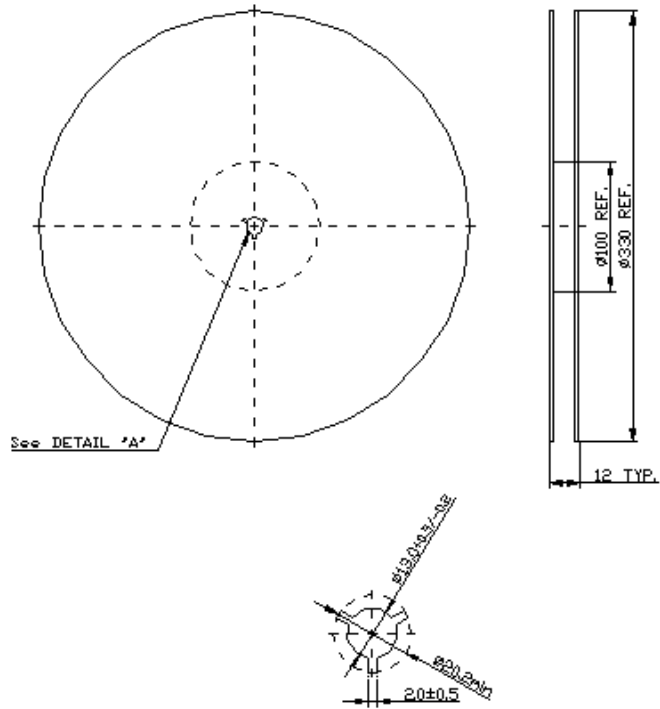

2.TAPE DIMENSION

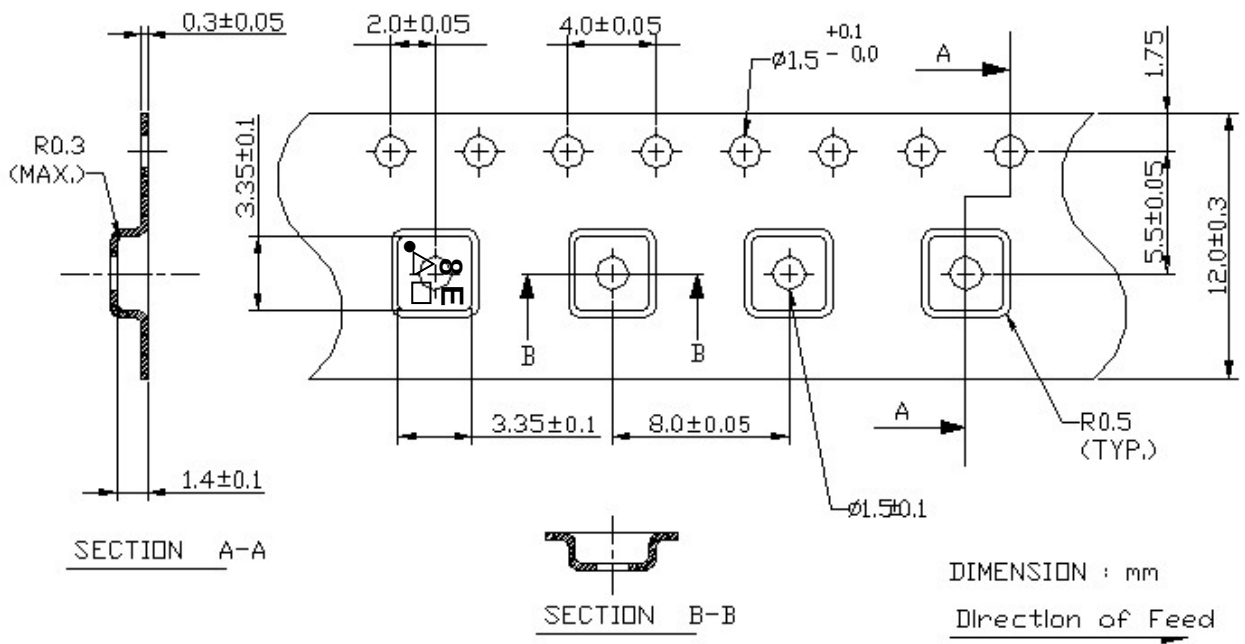

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 250±10°C peak (max. 10sec).
4. Time : 2 times.

