



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Filter 1795 MHz SMD 3.0X3.0 mm

TST Parts No.:TA2032B

Customer Parts No.:_____

Customer signature required

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Sam Lin *Sam Lin*

Approval by:_____ Andy Yu *Andy Yu*

Date:_____ 2018/11/26

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com


SAW Filter 1795 MHz SMD 3.0×3.0mm

MODEL NO.: TA2032B

REV. 1.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitive Level: Level 1 (MSL1)



Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance : $Z_s = 50 \Omega$

Terminating load impedance : $Z_L = 50 \Omega$


Item	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	1795	-
Insertion Loss (1785 ~ 1805 MHz)	dB	-	2.1	3.0
Amplitude ripple (1785 ~ 1805 MHz)	dB	-	0.8	1.6
VSWR (1785 ~ 1805 MHz)	-	-	2.0	2.3
Group Delay Ripple (1785 ~ 1805 MHz)	ns	-	4	7
Attenuation				
10 ~ 210 MHz	dB	40	51	-
210 ~ 1377 MHz	dB	30	41	-
1377 ~ 1397 MHz	dB	30	42	-
1397 ~ 1581 MHz	dB	35	42	-
1581 ~ 1601 MHz	dB	35	48	-
1601 ~ 1735 MHz	dB	30	37	-
1845 ~ 1880 MHz	dB	40	58	-
1880 ~ 1989 MHz	dB	40	48	-
1989 ~ 2009 MHz	dB	40	50	-
2009 ~ 3500 MHz	dB	25	34	-
3500 ~ 4000 MHz	dB	20	29	-
4000 ~ 8500 MHz	dB	5	6	-
Temperature Coefficient	ppm/K	-	-36	-

Notes:


- (1). In production, devices will be tested at room temperature to a guard banded specification to ensure electrical compliance over temperature.
- (2). Typical values are based on average measurements at room temperature.

C. MEASUREMENT CIRCUIT:

HP Network analyzer

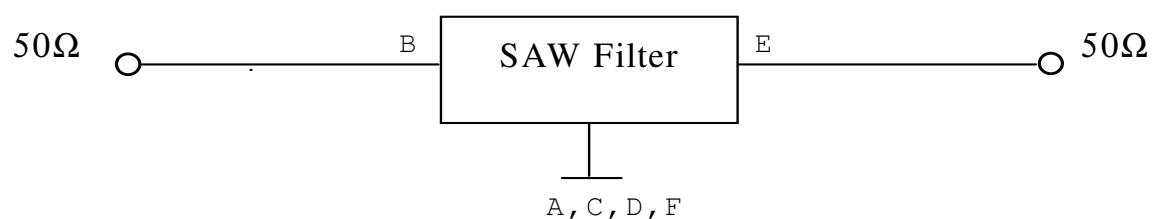

D. OUTLINE DRAWING:

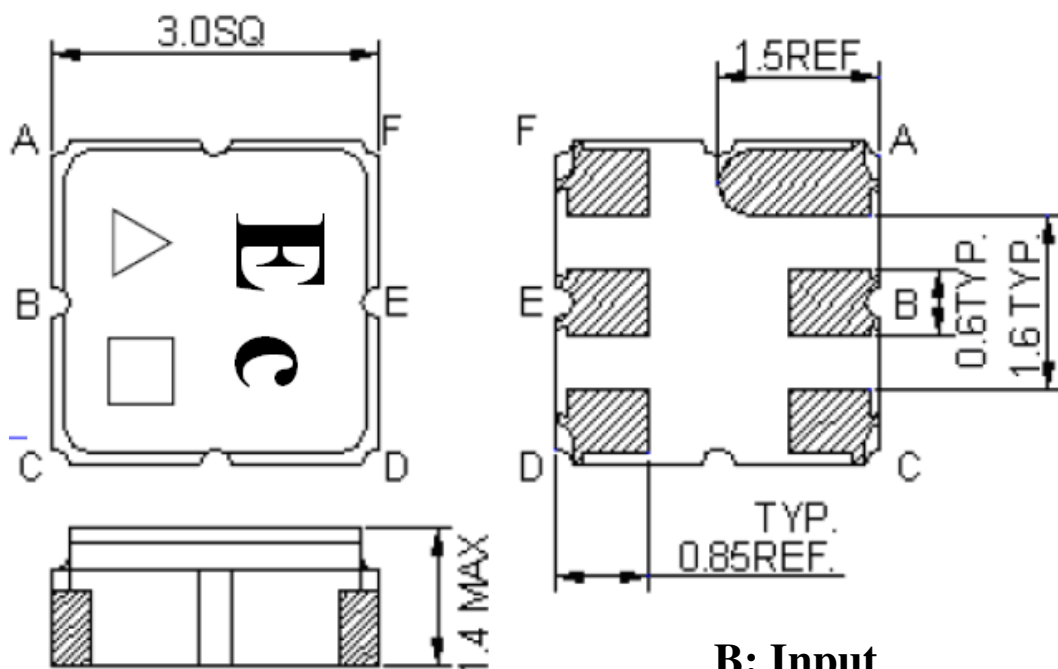

B: Input
E: Output
A, C, D, F: Ground
Unit: mm


△ : Year Code (2009->9, 2010->0,..., 2018->8)

□ : Date Code (Follow the table from planner each year)


WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

E. Frequency Characteristics :


Span 500 MHz

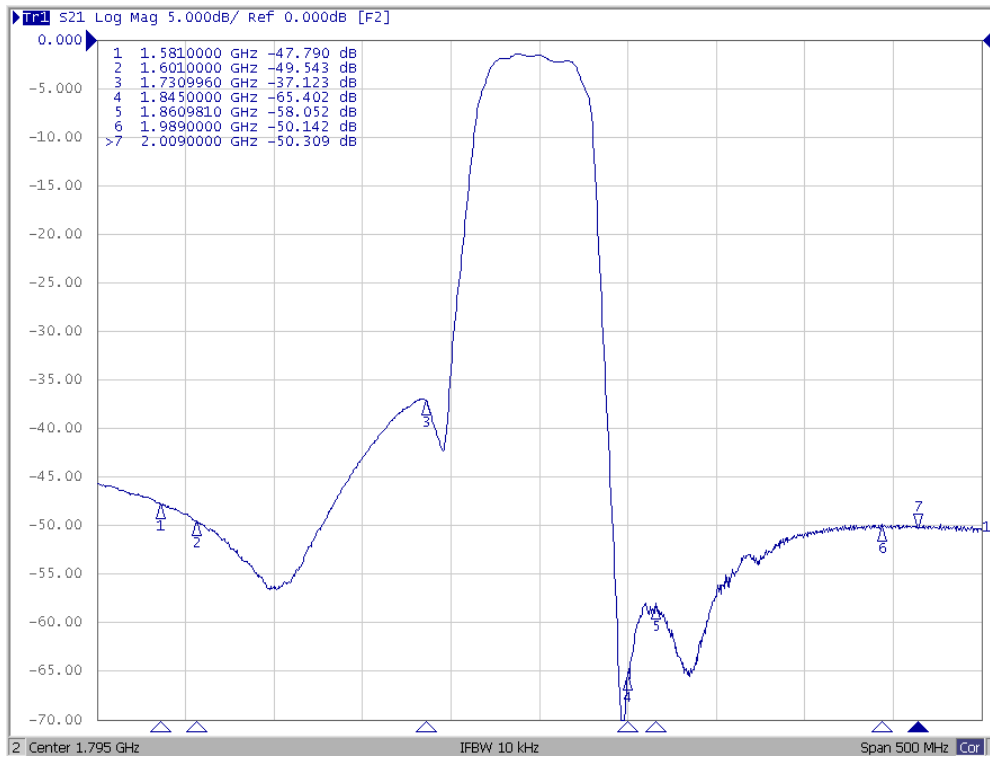


Span 8500 MHz

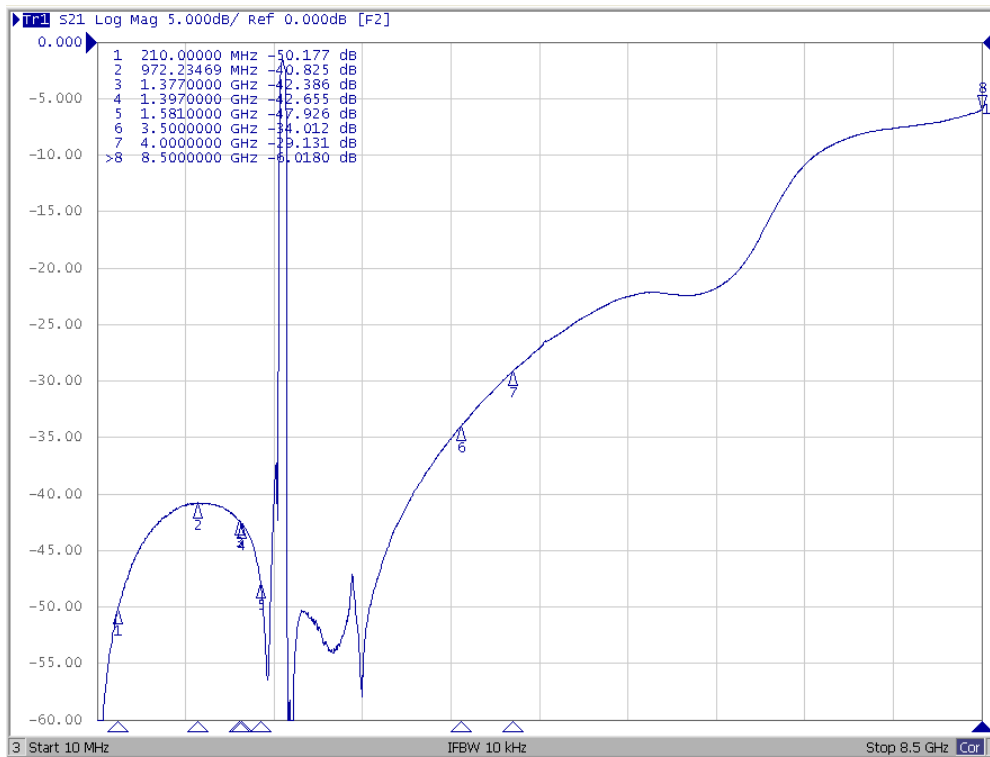


Span 100 MHz

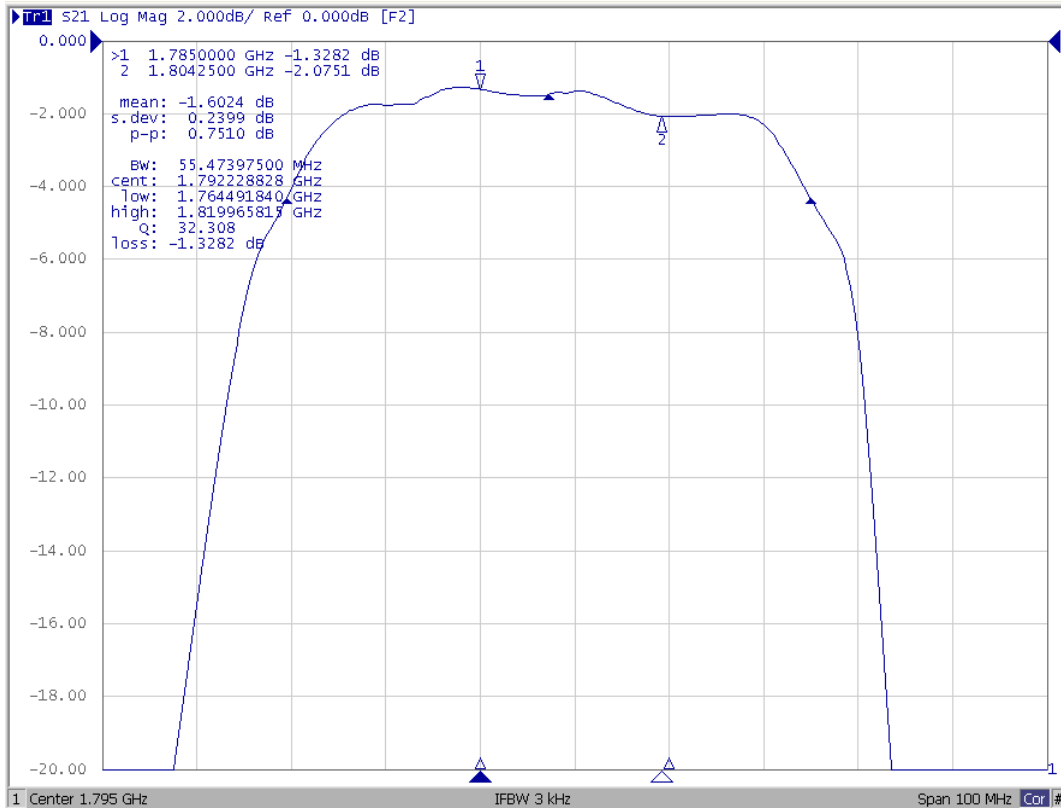

Reflection function (Span 100)

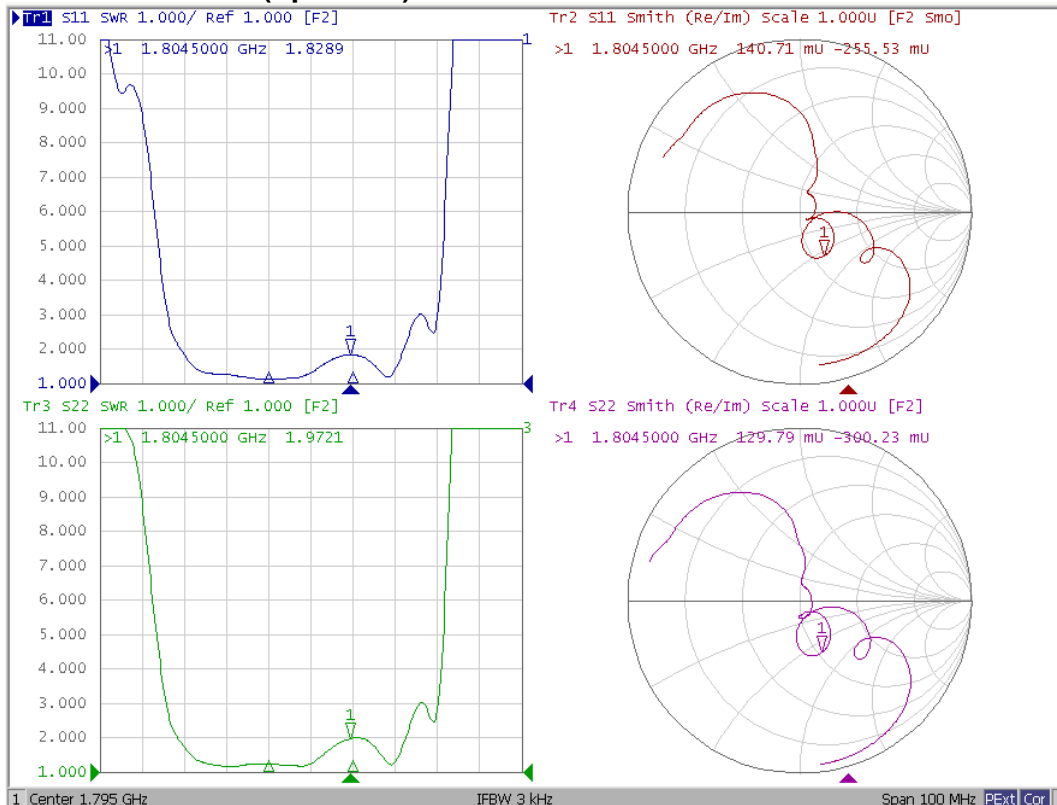


F. PCB FOOTPRINT:

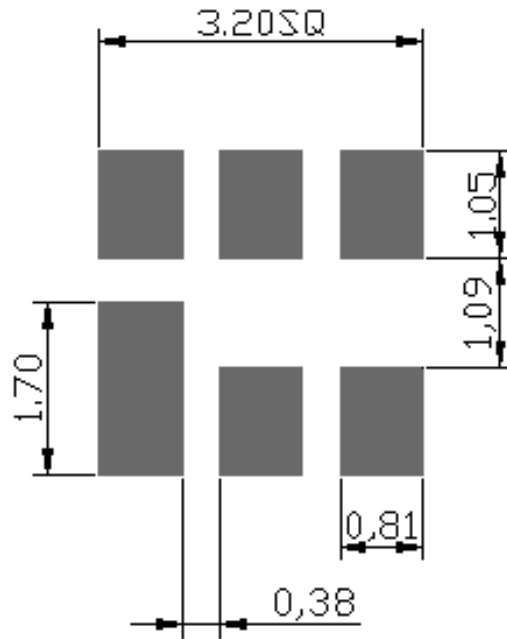


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

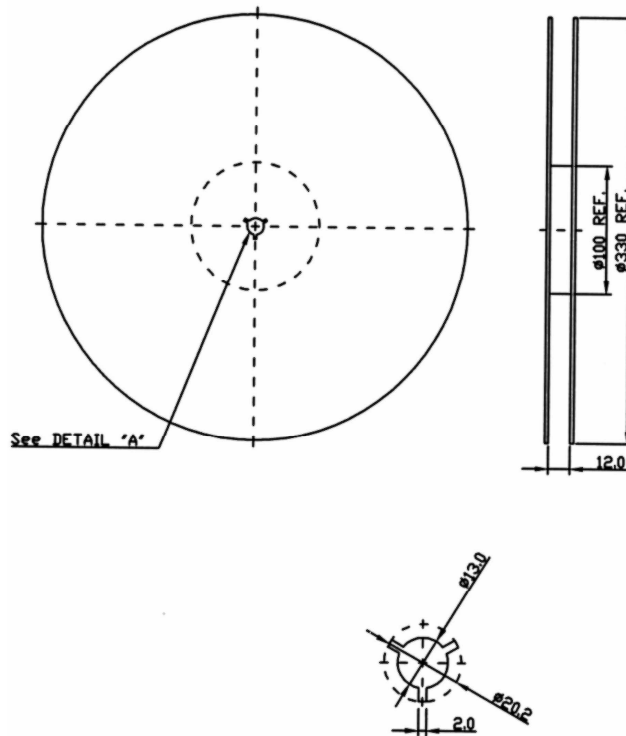

2. TAPE DIMENSION

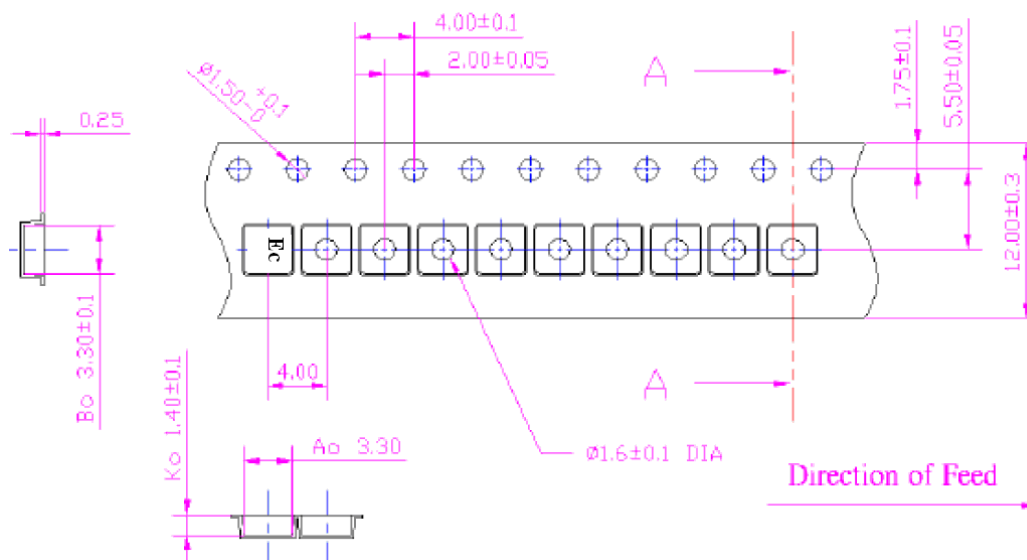

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

