SIGN	DATE	DESCRIPTION	APPROVER
⚠			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

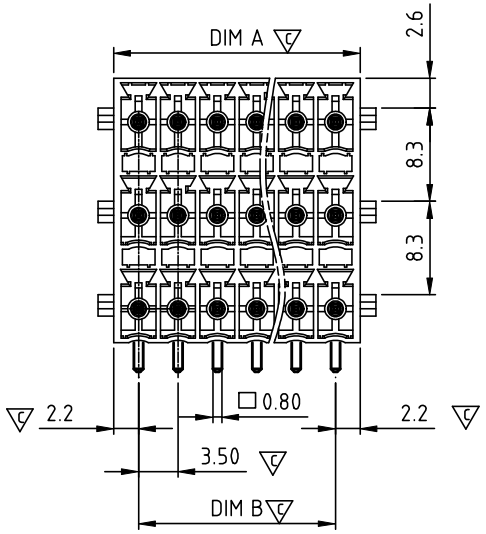

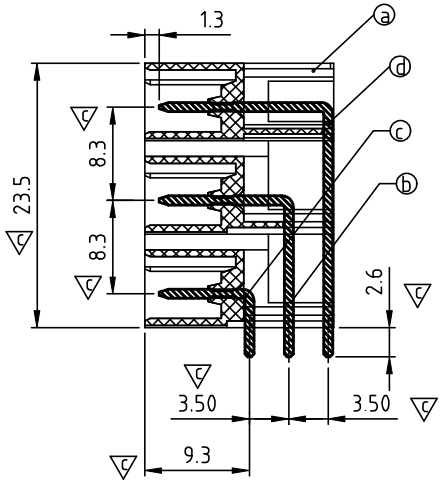

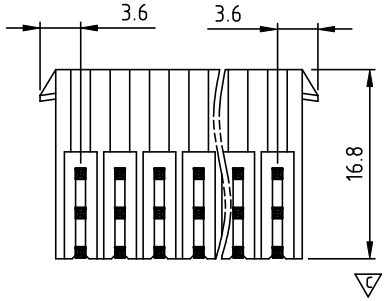

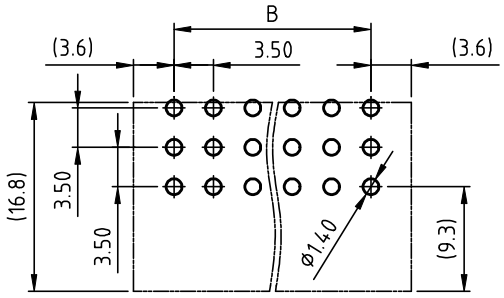

PCB Layout

Material:

- Item ⓐ Terminal(housing): PA66 30% GF (UL94V-0)
- Item ⓑ Contact pin of short: copper Tin plated
- Item ⓒ Contact pin of long: copper Tin plated
- Item ⓓ Contact pin of best long: copper Tin plated

Electrical: cULus

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ±10°C/5 Sec
- APPROVAL:
- Critical dimension: ▽c

K3 xx 1 3 x 1 xxxx G

- xx — No. OF POLES
  - 06: 3×2 POLES
  - 09: 3×3 POLES
  - :
  - :
  - 72: 3×24 POLES
- x — COLOR
  - 0 Black (RAL9005)
  - 3 Orange(RAL2011/P)
  - 5 Green(RAL6018/T)
  - 6 Blue (RAL5015/A)
  - 8 Grey(RAL7035/D)
- xxxx — A000: "@" Logo (Standard); A00A: "ANYTEK" Mark; Any special item by customer requst. please contact sales department.
- G — RoHS compliant (lead<4%) In copper Alloy

N=NUMBER OF CONTACTS

DIM		TOL		
		3×2P--3×5P	3×6P--3×16P	3×17P--3×24P
Dim A	(N/3-1)×3.5+4.4	±0.20	±0.25	±0.30
Dim B	(N/3-1)×3.5			

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K3 3.5mm With latch Series (90°-Right angle) DIP type				
PART NO.	K3xx13x1xxxxG			DWG NO.	8K30009
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Runner 2010.09.18	Runner 2010.06.28	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°