



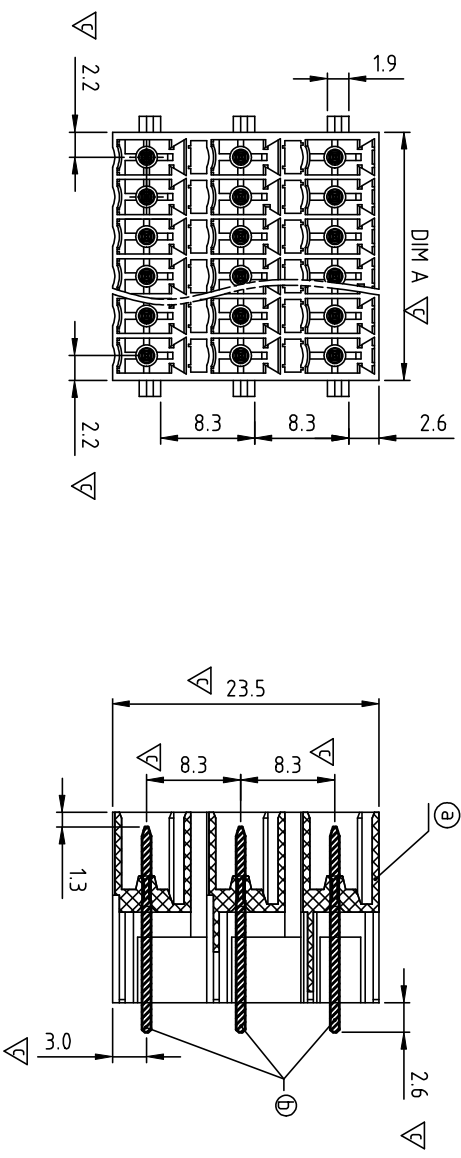

- Material:
- Item (a) Terminal(housing): PA66 30% GF (UL94 V-0)
 - Item (b) Contact pin : copper Tin plated
- Electrical:
- | | |
|------------------------|-------------------|
| Voltage rating: | 160V |
| Current rating: | 5.5A |
| Withstanding Voltage: | 1.32 KV |
| Operating temperature: | -40°C to +115°C |
| Soldering temperature: | 250°C ±10°C/5 Sec |
- APPROVAL:
- Critical dimension: ∇

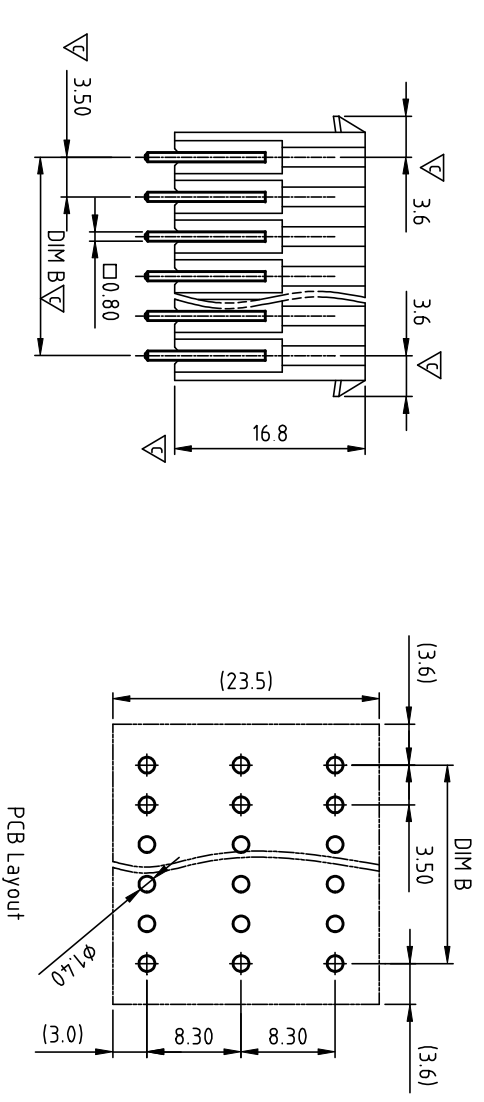

K3 xx 1 3 x 0 xxxx G

No. OF POLES — 06: 3x2 POLES
09: 3x3 POLES
12: 3x4 POLES
15: 3x5 POLES
18: 3x6 POLES
21: 3x7 POLES
24: 3x8 POLES

COLOR — 0 Black (RAL9005)
3 Orange(RAL2011/P)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)

RoHS compliant (lead<4%)
In copper Alloy

A000: "®" Logo (Standard)
A00A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

N=NUMBER OF CONTACTS

DIM	TOL	
Dim A (N/3-1)×3.5+4.4	3×2P--3×5P	±0.20
Dim B (N/3-1)×3.5	3×6P--3×16P 3×17P--3×24P	±0.25
		±0.30

ANYTEK

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

CUSTOMER COPY

TITLE

K3 3.5mm With latch Series (180°-Vertical) DIP type

PART NO.

K3x13x0xxxxG

APPROVED

CHECKED

DESIGNED

DRAWN

Runner

2010.09.18

DWG NO.

8K30012

CUST NO.

UNIT:

mm

SCALE:

NONE

SHEET:

01/01

REV:

B

Tolerance

±0.50

±0.30

±0.10

±1°