



UT5504

Power MOSFET

P-CHANNEL LOGIC LEVEL ENHANCEMENT MODE FIELD EFFECT TRANSISTOR

DESCRIPTION


The UTC **UT5504** is a P-channel enhancement mode power MOSFET, providing customers fast switching, ruggedized device design, low on-resistance and cost-effectiveness by UTC's advanced technology.

The UTC **UT5504** can be used in applications such as DC/DC converters, all commercial-industrial surface mount and low voltage devices.

FEATURES

- * Low On-Resistance
- * Simple Drive Requirement
- * Fast Switching Speed

SYMBOL




ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UT5504L-TM3-T	UT5504G-TM3-T	TO-251	G	D	S	-	-	-	-	-	Tube
UT5504L-TN3-R	UT5504G-TN3-R	TO-252	G	D	S	-	-	-	-	-	Tape Reel
UT5504L-S08-R	UT5504G-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT5504G-TM3-T	(1)Packing Type	(1) T: Tube, R: Tape Reel
	(2)Package Type	(2) TM3: TO-251, TN3: TO-252, S08: SOP-8
	(3)Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free

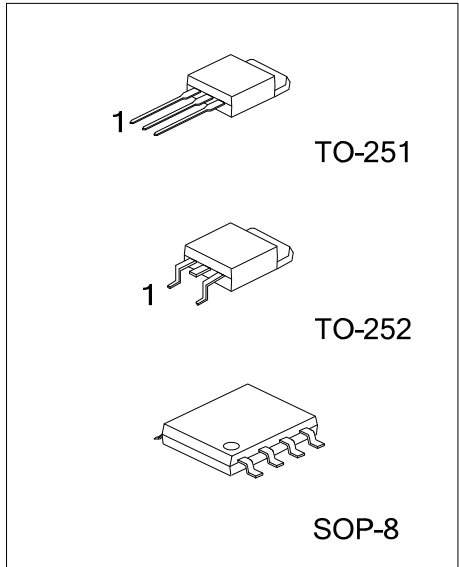

MARKING

TO-220 / TO-220F / TO-252	SOP-8
UTC UT5504 Lot Code 1 L: Lead Free G: Halogen Free Date Code	8765 UTC UT5504 1 2 3 4 Date Code L: Lead Free G: Halogen Free Lot Code

■ ABSOLUTE MAXIMUM RATINGS (T_C = 25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V _{DS}	-40	V
Gate-Source Voltage		V _{GS}	±20	V
Continuous Drain Current	T _C =25°C	I _D	-8	A
	T _C =70°C		-6	A
Pulsed Drain Current		I _{DM}	-32	A
Single Pulsed Avalanche Energy (Note 3)		E _{AS}	77	mJ
Power Dissipation	TO-251/TO-252	P _D	41	W
	SOP-8		1.6	W
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature.

3. L=30mH, I_{AS}=-2.26A, V_{DD}=-20V, R_G=25Ω, Starting T_J=25°C

■ THERMAL DATA (NOTE 3)

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-251/TO-252	θ _{JA}	50	°C/W
	SOP-8		90	°C/W
Junction to Case	TO-251/TO-252	θ _{JC}	3	°C/W
	SOP-8		78	°C/W

Notes: 1. Pulse width limited by maximum junction temperature.

2. Duty cycle ≤ 1%

3. Device mounted on FR-4 substrate P_C board, 2oz copper, with 1inch square copper plate.

■ **ELECTRICAL CHARACTERISTICS** ($T_C = 25^\circ\text{C}$, unless otherwise specified)





PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	I _D =-250μA, V _{GS} =0V	-40			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =-32V, V _{GS} =0V			1	μA
		V _{DS} =-30V, V _{GS} =0V, T _J =125°C			10	
Gate- Source Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±250	nA
On-State Drain Current (Note 1)	I _{D(ON)}	V _{DS} =-5V, V _{GS} =-10V	-32			A
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =-250μA	-1.0		-2.5	V
Static Drain-Source On-State Resistance (Note 1)	R _{DS(ON)}	V _{GS} =-4.5V, I _D =-6.0A		55	94	mΩ
		V _{GS} =-10V, I _D =-8.0A		38	55	
DYNAMIC PARAMETERS						
Input Capacitance	C _{ISS}	V _{GS} =0V, V _{DS} =-10V, f=1MHz		860		pF
Output Capacitance	C _{OSS}			160		pF
Reverse Transfer Capacitance	C _{RSS}			140		pF
SWITCHING PARAMETERS (Note 2)						
Total Gate Charge	Q _G	V _{GS} =-10V, V _{DS} =0.5BV _{DSS} , I _D =-8.0A		25	120	nC
Gate to Source Charge	Q _{GS}			5.8		nC
Gate to Drain Charge	Q _{GD}			4.8		nC
Turn-ON Delay Time	t _{D(ON)}	V _{GS} =-10V, V _{DS} =-20V, I _D ≈ -8.0A, R _{GS} =6Ω		7.2	35	ns
Rise Time	t _R			17.6	50	ns
Turn-OFF Delay Time	t _{D(OFF)}			38	250	ns
Fall-Time	t _F			24	120	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Continuous Current	I _S				-8	A
Pulsed Current (Note 3)	I _{SM}				-32	A
Drain-Source Diode Forward Voltage (Note 1)	V _{SD}	I _F =I _S , V _{GS} =0V			-1.2	V
Reverse Recovery Time	t _{RR}	I _F =-5.0A, dI _F /dt=100A/μs		98		ns
Reverse Recovery Charge	Q _{RR}			220		nC

Notes: 1. Pulse test: Pulse Width $\leq 300\mu\text{sec}$, Duty Cycle $\leq 2\%$.

2. Independent of operating temperature.

3. Pulse width limited by maximum junction temperature.

TYPICAL CHARACTERISTICS

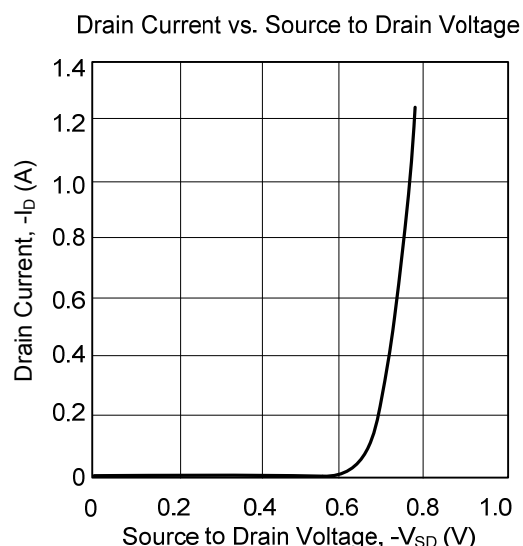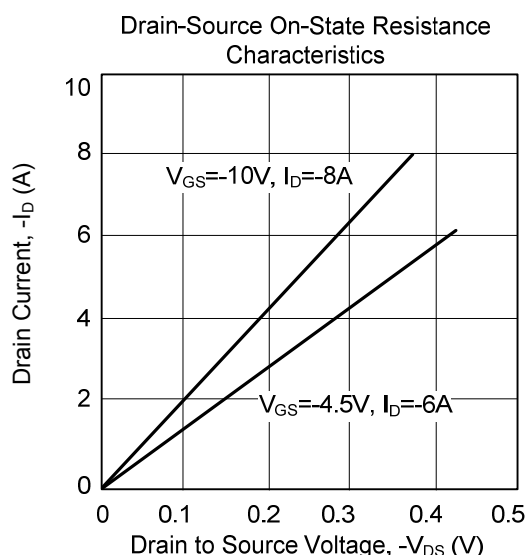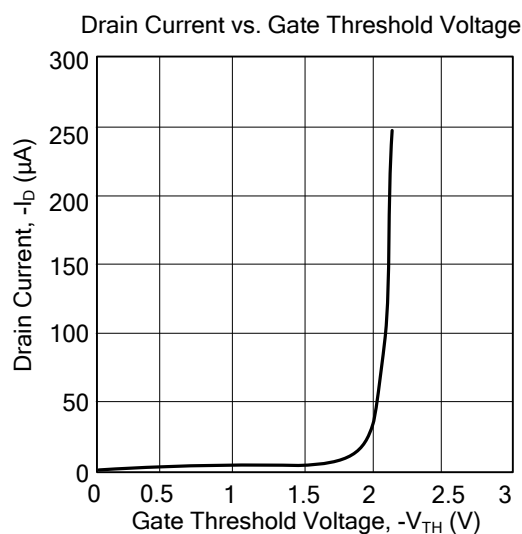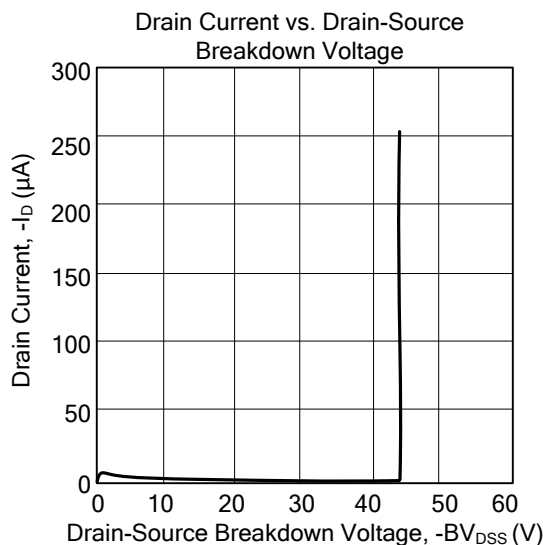

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.