



**UT4446****Power MOSFET****15A, 30V N-CHANNEL
ENHANCEMENT MODE****DESCRIPTION**

The **UT4446** uses UTC's advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES


- * $R_{DS(ON)} < 8.5m\Omega$ @ $V_{GS}=10V$, $I_D=15A$
- * $R_{DS(ON)} < 14.5m\Omega$ @ $V_{GS}=4.5V$, $I_D=11A$
- * Low capacitance
- * Low gate charge
- * Fast switching capability
- * Avalanche energy specified

**SOP-8****SYMBOL****ORDERING INFORMATION**

Ordering Number	Package	Pin Assignment								Packing
		1	2	3	4	5	6	7	8	
UT4446G-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT4446G-S08-R	(1)Packing Type	(1) R: Tape Reel
	(2)Package Type	(2) S08: SOP-8
	(3)Green Package	(3) G: Halogen Free and Lead Free

MARKING

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain-Source Voltage	V_{DSS}	30	V
Gate-Source Voltage	V_{GSS}	± 20	V
Continuous Drain Current	I_D	15	A
Pulsed Drain Current	I_{DM}	40	A
Avalanche Current	I_{AR}	20	A
Repetitive avalanche energy $L=0.1\text{mH}$	E_{AR}	50	mJ
Power Dissipation	P_D	1.6	W
Junction Temperature	T_J	+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Pulse width limited by $T_{J(MAX)}$






■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction-to-Ambient	θ_{JA}	75	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =250μA	30			V
Zero Gate Voltage Drain Current		I _{DSS}	V _{DS} =24V, V _{GS} =0V			1	μA
Gate-Body Leakage Current		I _{GSS}	V _{DS} =0V, V _{GS} =±20V			100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	1	2.2	3	V
On State Drain Current		I _{D(ON)}	V _{DS} =5V, V _{GS} =10V	40			A
Static Drain-Source On-Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =15A		6.9	8.5	mΩ
			V _{GS} =4.5V, I _D =11A		11.8	14.5	
Forward Transconductance		g _{FS}	V _{DS} =5 V, I _D =15 A		27		S
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{DS} =15V, V _{GS} =0V, f=100kHz		1520	1825	pF
Output Capacitance		C _{OSS}			306		pF
Reverse Transfer Capacitance		C _{RSS}			214		pF
SWITCHING PARAMETERS							
Turn-ON Delay Time		t _{D(ON)}	V _{GS} =10V, V _{DS} =15V, R _L =1.0Ω, R _G =3Ω		7.2	56	ns
Turn-ON Rise Time		t _R			8.2	80	ns
Turn-OFF Delay Time		t _{D(OFF)}			22	392	ns
Turn-OFF Fall-Time		t _F			6.7	216	ns
Total Gate Charge	4.5V	Q _G	V _{DS} =15V, V _{GS} =4.5V, I _D =15A		17	20	nC
	10V				33.7	40	
Gate Source Charge		Q _{GS}			6.2		nC
Gate Drain Charge		Q _{GD}			10		nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Diode Forward Voltage		V _{SD}	I _S =1A, V _{GS} =0V		0.71	1	V
Maximum Body-Diode Continuous Current		I _S				4	A
Body Diode Reverse Recovery Time		t _{RR}	I _F =15A, dI/dt=100A/μs		24	30	ns
Body Diode Reverse Recovery Charge		Q _{RR}	I _F =15A, dI/dt=100A/μs		19		nC

TYPICAL CHARACTERISTICS

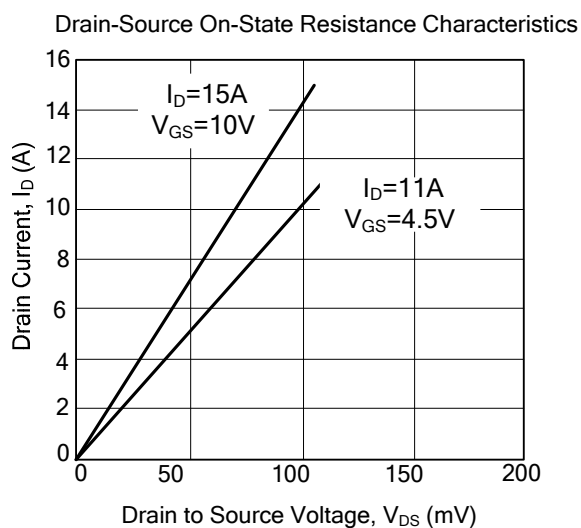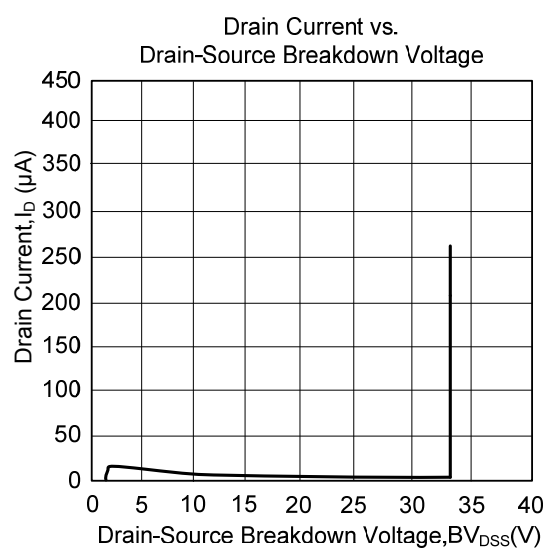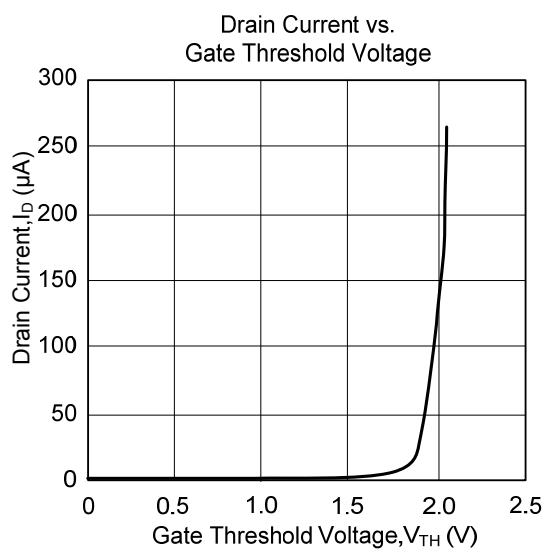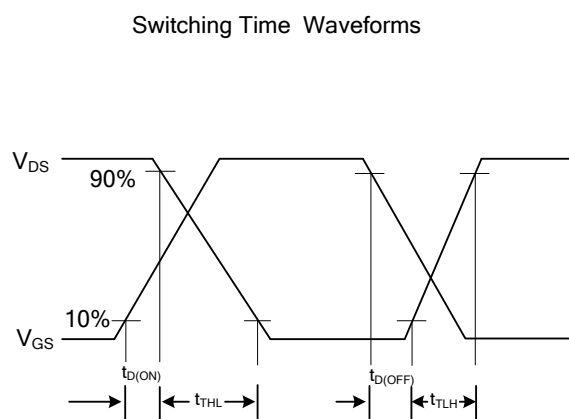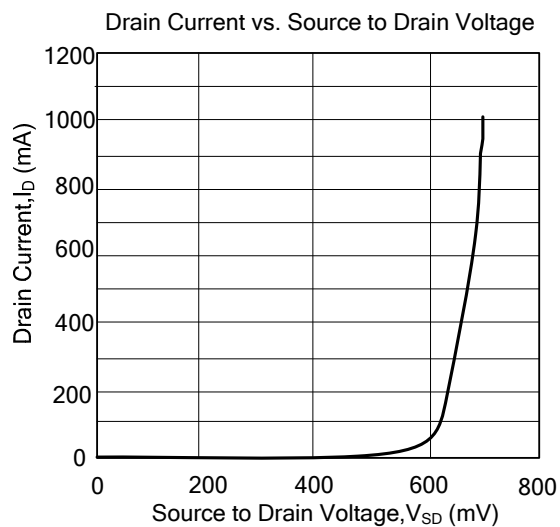

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.