



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: Dec, 21, 2004

Product Name: SAW Filter 1950MHz SMD 2.5X2.0 mm

TST Parts No.: TA0401A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 12,21,2004



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1950 MHz for Mobile Communication

MODEL NO.: TA0401A

REV. NO.:1.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 0 V
3. Operating Temperature: -20°C to +75°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item		Min.	Typ.	Max.
Center frequency	F_c (dB)	-	1950	-
Insertion loss within 1920 ~1980 MHz	IL (dB)	-	2.4	3.4
Amplitude ripple (p-p) within 1920 ~ 1980 MHz	(dB)	-	1.1	2.0
Attenuation (Reference level from 0 dB)				
1135 ~ 1145 MHz	(dB)	25	28	-
1705 ~ 1715 MHz	(dB)	25	29	-
1805 ~ 1880 MHz	(dB)	25	35	-
2110 ~ 2170 MHz	(dB)	30	34	-
2300 ~ 2360 MHz	(dB)	30	33	-
2490 ~ 2550 MHz	(dB)	30	34.5	-
2680 ~ 2740 MHz	(dB)	30	34	-
3060 ~ 3120 MHz	(dB)	30	44	-
3840 ~ 3960 MHz	(dB)	30	38	-
VSWR within 1920 ~1980 MHz		-	1.6	2.6
Source impedance	Z_s (Ω)	-	50	-
Load impedance	Z_L (Ω)	-	50	-

Note1. No matching network required for operation at 50 Ω


C.OUTLINE DRAWING:

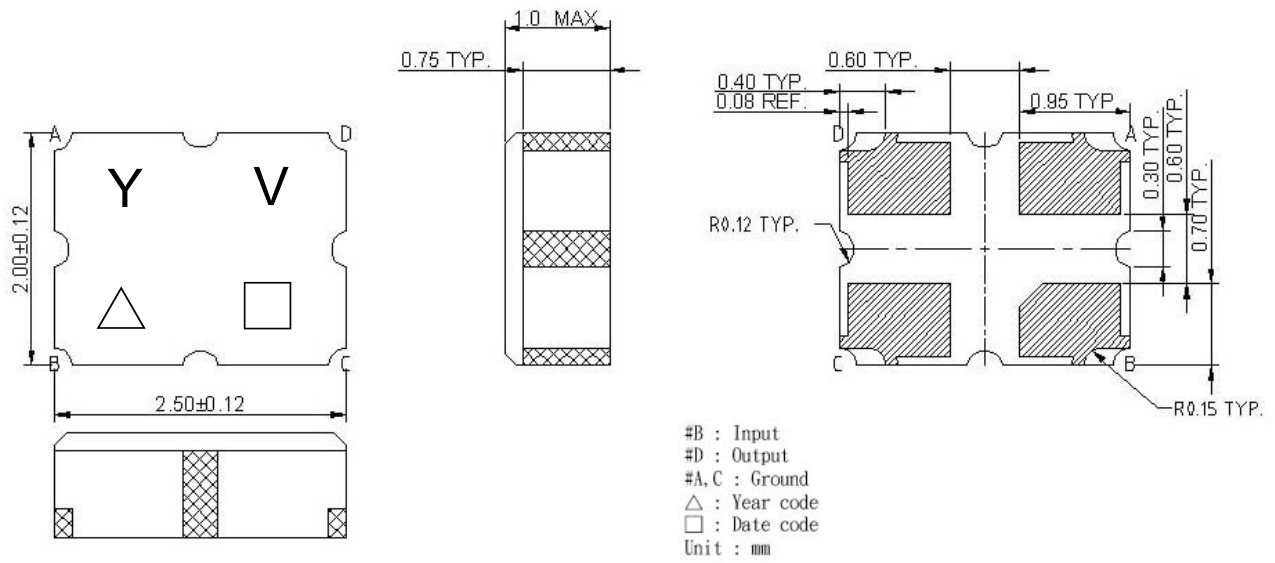



D. MEASUREMENT CIRCUIT:

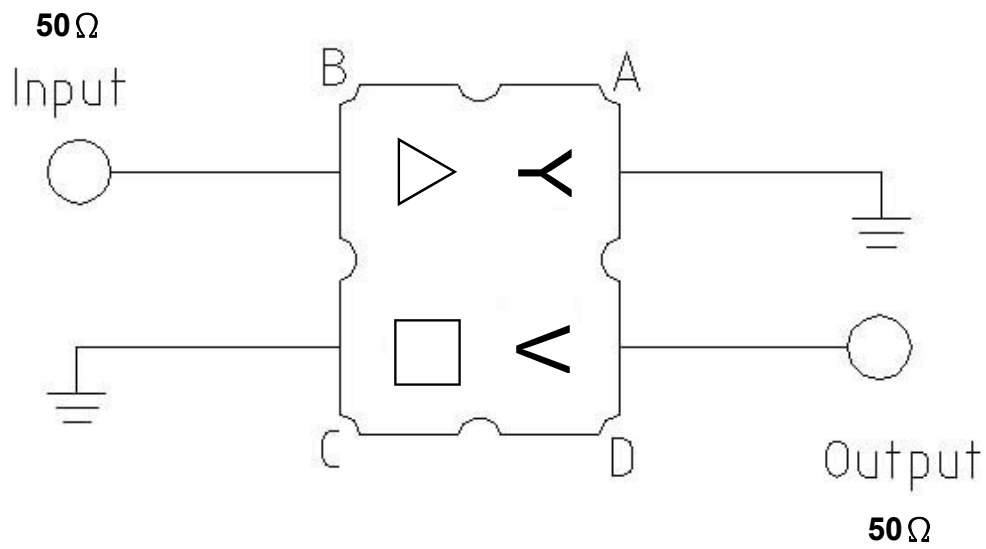

E. PCB Footprint:

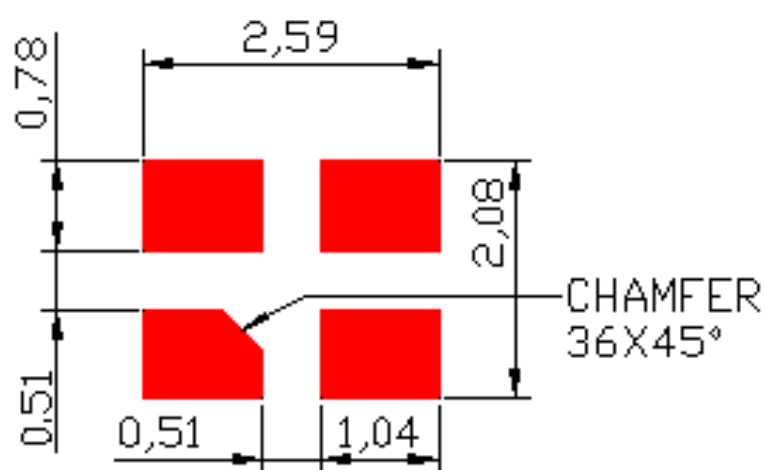


F. Frequency Characteristics : Transfer function

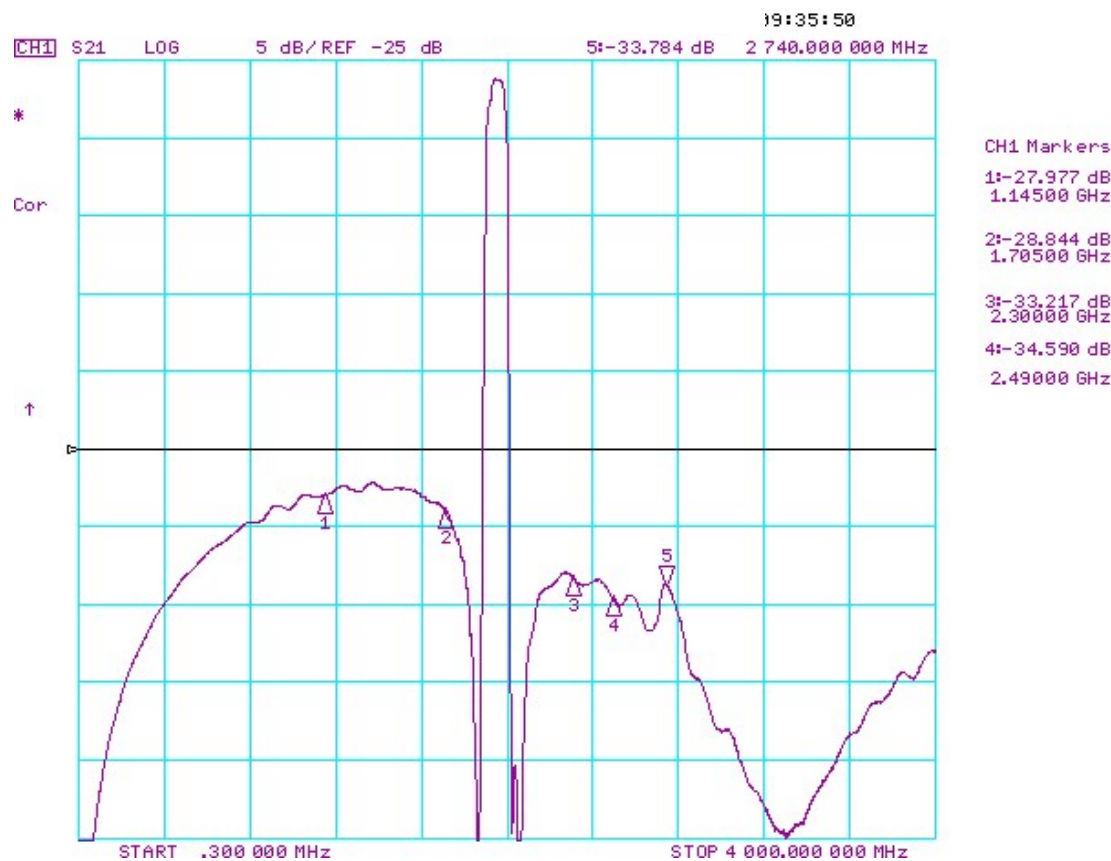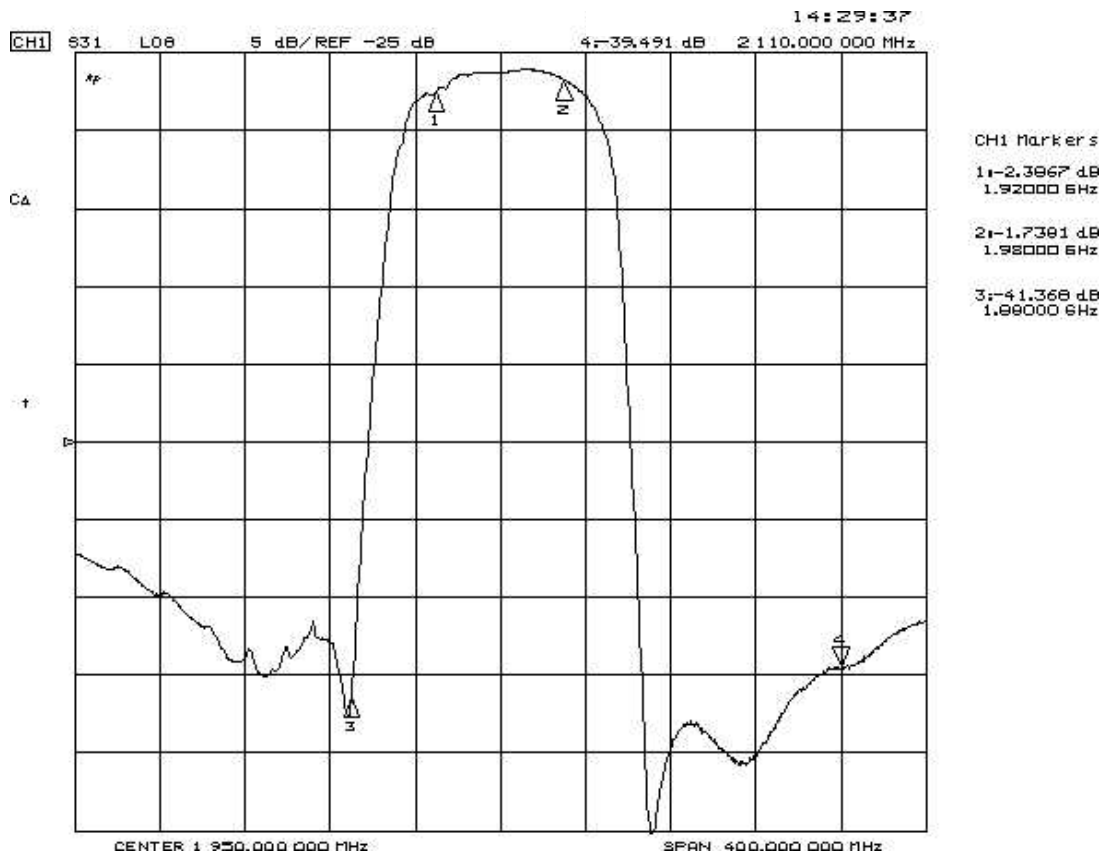


Reflections Functions :

S11 VSWR

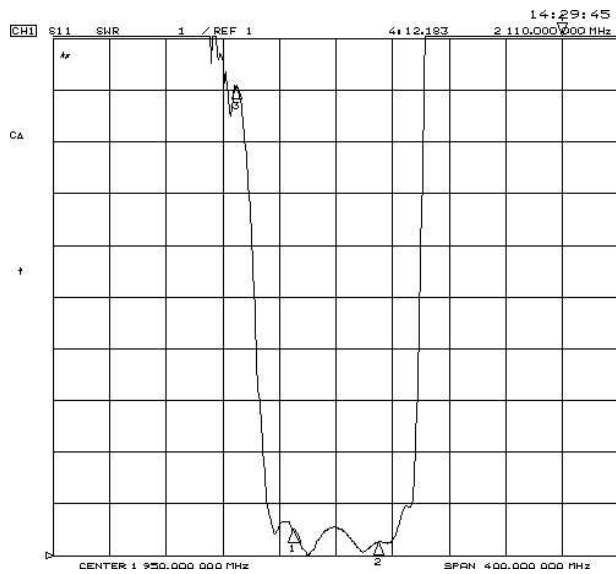

CH1 Markers


Marker	Frequency (GHz)	VSWR
1	1.9210	1.92000
2	1.9269	1.98000
3	1.9089	1.88000

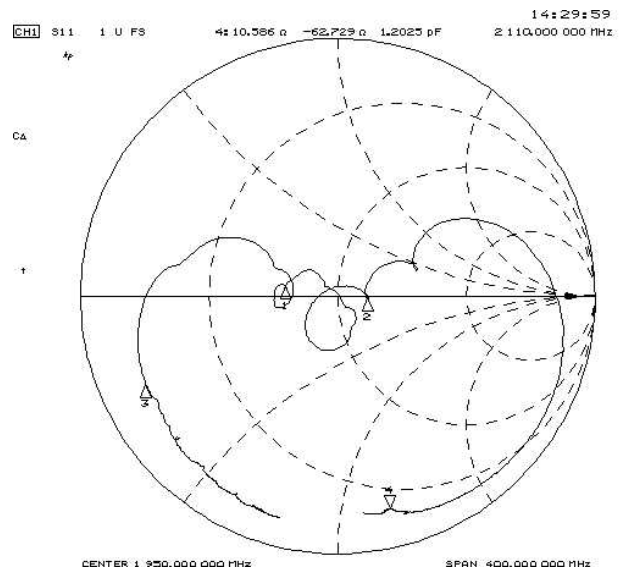

CH1 Markers


Marker	Frequency (GHz)	VSWR
1	33.039 0	2.7383 0
2	63.232 0	-4.55.08 0
3	5.3704 0	-10.748 0

S22 VSWR

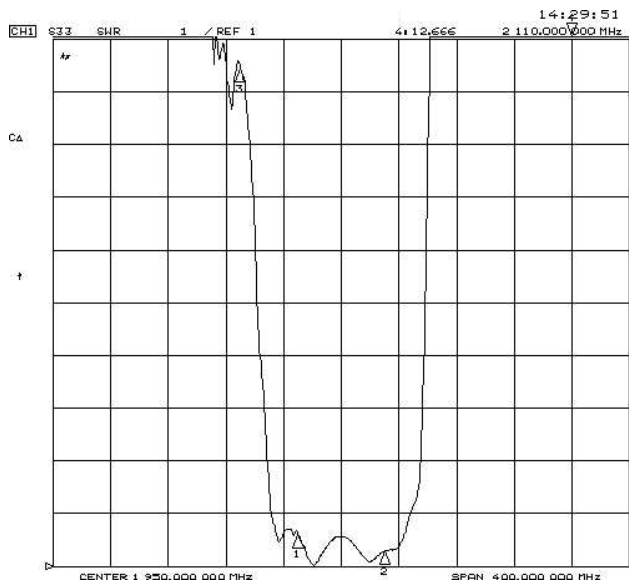

CH1 Markers

Marker	Frequency (GHz)	VSWR
1	1.6182	1.92000
2	1.2922	1.98000
3	1.0.446	1.88000

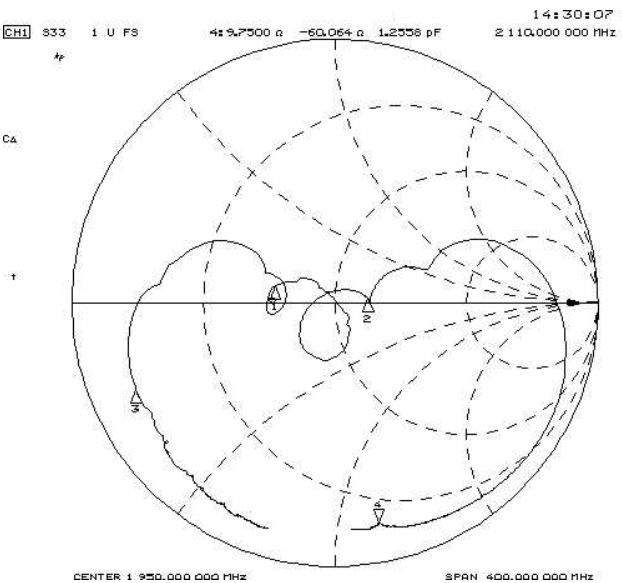


CH1 Markers

Marker	Frequency (GHz)	VSWR
1	31.267 0	4.2021 0
2	64.461 0	2.3086 0
3	5.0391 0	-10.224 0

G. PACKING:

1. REEL DIMENSION

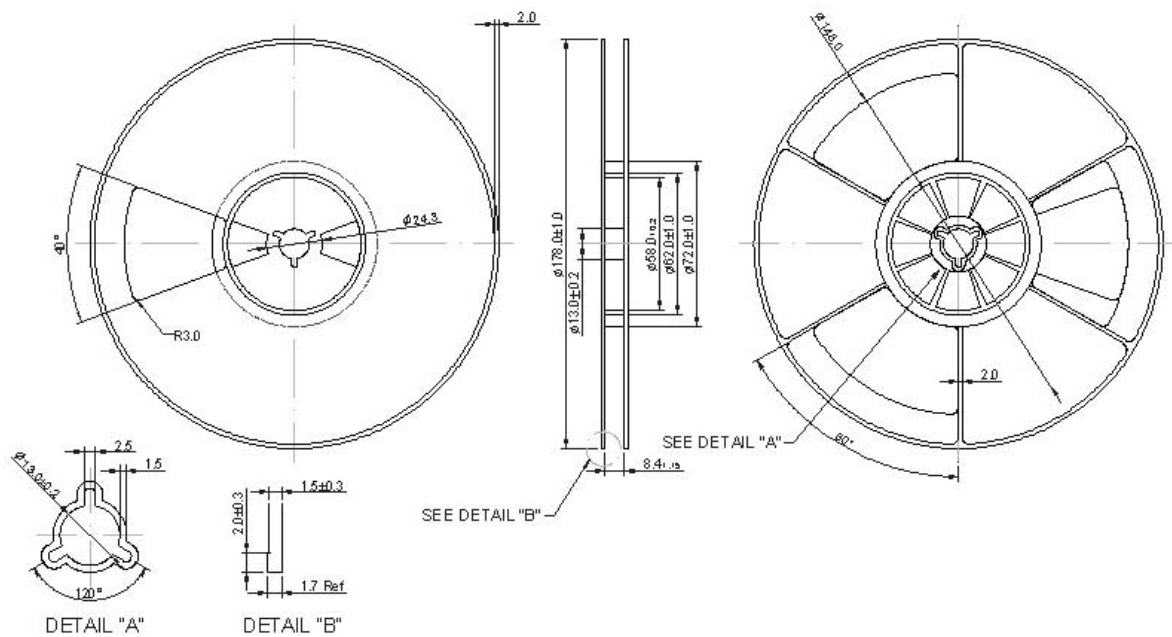

2. TAPE DIMENSION

