



NOTES:


1. SPECIFICATIONS

- Switch Function: Single Pole Single Throw
- Contact Rating: 50mA at 12Vdc
- Insulation Resistance: 50MΩ min.
- Contact Resistance: 100mΩ max.
- Operating Life: 80,000 cycles
- Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3KgF Shall Be Applied In The Direction
- Operation Temperature Range: -25°C to +70°C

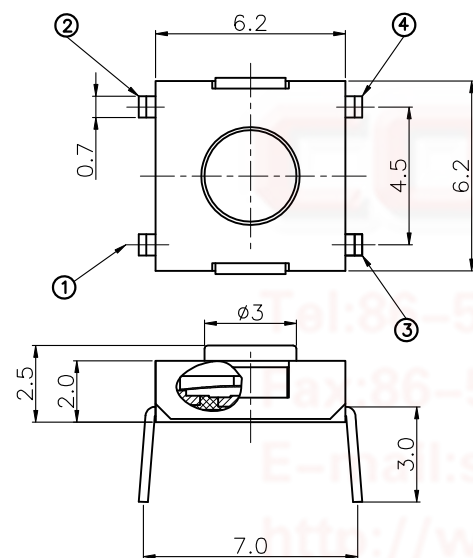

Recommend PCB layout
Tolerance ±0.05

Circuit



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/31/17'		

- Wave Soldering: Recommended Solder Temperature At 500°F(260°C)max. 5 Seconds
- Hand Soldering: Use Soldering Iron Of 30 Watts, Controlled At 608°F(320°C) Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1041-02 - X X X X X X

- Operating Life
8: 80000 cycles
- Operating force
250: 250gf
- Packing type
A: polybag
- Actuator color
K: Black
R: Red
- Housing color
K: Black
- Profile Height
1: 2.5mm
- Size
1: 6.2mm*6.2mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNITS	TITLE
X.	±0.60	X.	±5°	⊕	mm	TACT SWITCH DIP TYPE 6.2mmX6.2mm
.X	±0.38	.X	±3°			
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER					
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1041-02-1XXXXXX-A					



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD