
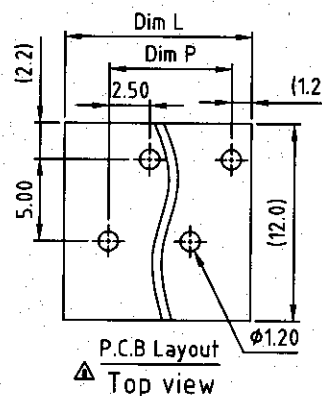

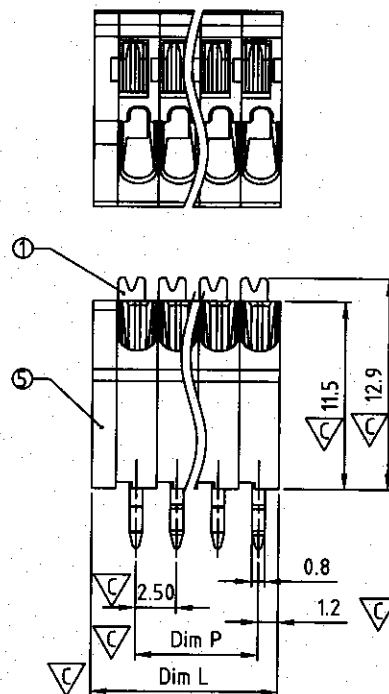


The color of lever is consistent with body's

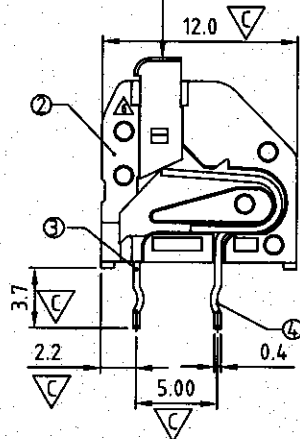

△△ N = Number of poles
Dim L=(N×2.5)+1.5
Dim P=(N-1)×2.5

	Dim L	Dim P
2p-8p	±0.20	
10p-12p	±0.30	
14p-18p	±0.40	
20p-24p	±0.50	

HC xx B 0 x 0 xxxx G △△ RoHS compliant (lead<4%) In copper Alloy

△ NO of poles
02 2 poles
04 4 poles
... ..
24 24 poles

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request, please contact sales department.

SIGN	DATE	DESCRIPTION	APPROVER
△	1/27'07	The soldering temperature changed from 245°C to 250°C	Tony
△	8/8'07	Voltage rating changed from 150V to 300V	Tony
△	9/16'08	Add "CQC" Safety Approval Logo	Tony
△	9/16'08	Wire strip length changed from 6-7mm to 9-10mm	Tony
△	9/16'08	Operating temperature changed (-40°C to +115°C)	Tony
△	4/24'10	Electrical and Structure changed	Runner
△	12/25'10	How to order is changed	Runner
△	06/29'13	Add "TUV" Safety Approval Logo////update the drawing	Da cheng
△	12/28'13	update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Insulator(lever): Thermoplastic (UL94V-0)
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ Side contact pin: PhBz.Tin plated.
- Item ④ Center contact pin: PhBz.Tin plated.
- Item ⑤ Side Cover: Thermoplastic (UL94V-0)

- △ Electrical: cULus CQC TUV △
- △ Voltage rating: 300V 300V 150V
- Current rating: 2A 2A 2A
- Wire range: 0.2~0.5mm²
- Solid wire(AWG): 20-26 20
- Stranded wire(AWG): 20-26 20
- △ Wire strip length: 8.5-10.0mm
- Withstanding Voltage: 1.6KV 2.5KV 2.5KV
- △ Operating temperature: -40°C to +115°C
- △ The soldering temperature: 260°C±5°C/5 Sec.
- △ Safety Approval: cULus CQC TUV
- △ Critical dimension: ∇



ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

				PROPERTY OF ARTER TECHNOLOGY CO., LTD			
TITLE	HC 2.5mm Series (Double row center contact link together with end cover) 300P						
PART NO.	HCxxB0x0xxxxG			DWG NO.	8HC0302		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Da cheng 2013.12.28	Da cheng 2013.12.28			UNIT: mm	X. ±0.50
			SCALE: NONE			X.X ±0.30	
	SHEET: 01/01	REV: J	X.XX ±0.10				
							X* ±1*