

SIGN	DATE	DESCRIPTION	APPROVER
△	01/20'07	The Soldering temperature from 245° to 250°	Aaron
△	10/29'08	ADD Tolerance	Seamus
△	09/12'12	Up date the drawing	Da cheng
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

△Material

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal cover: Thermoplastic (UL94V-0)
- Item ③ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
- Item ④ Female long contact : Brass. Tin Plated.
- Item ⑤ Spring clamp : Stainless steel

Electrical cULus

- Voltage rating: 150VAC
- Current rating: 2A
- Wire range:
- Solid wire(AWG): 20-26
- Stranded wire(AWG): 20-26
- Pull force:
- Screw:
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- △ Soldering temperature: 260°C±5°C/5 Sec △
- Safety Approval: cULus
- △ Critical dimension: △



HA xx 51 x 0 xxxx G △

RoHS compliant
(lead<4%)
In copper Alloy

No. OF POLES	△ Body Color
02 2 POLES	0 Black (RAL9005)
03 3 POLES	2 Red (RAL3001/D)
...	3 Orange(RAL2011/P)
24 24 POLES	4 Yellow(RAL1018/A)
	5 Green(RAL6018/T)
	6 Blue (RAL5015/A)
	8 Grey(RAL7004/P)
	9 White(RAL1102)
	C Multiple colors




0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

Dimension

DIM A	(N+1)×2.54
DIM B	(N-1)×2.54

N=Number of poles △

POLES	DIM A	DIM B
2p-8p	±0.15	±0.15
9p-12p	±0.25	±0.25
13p-18p	±0.30	±0.30
19p-24p	±0.40	±0.40

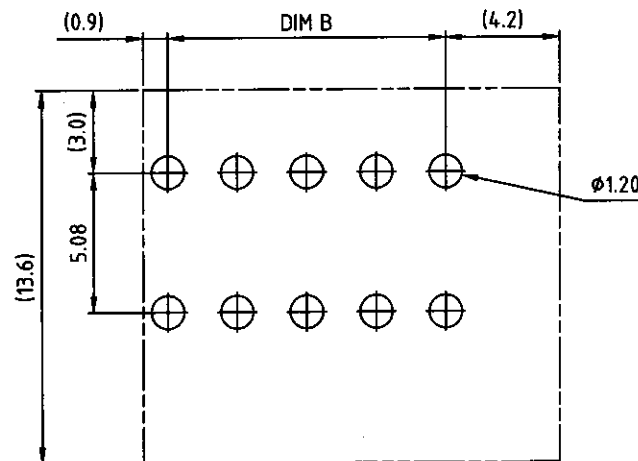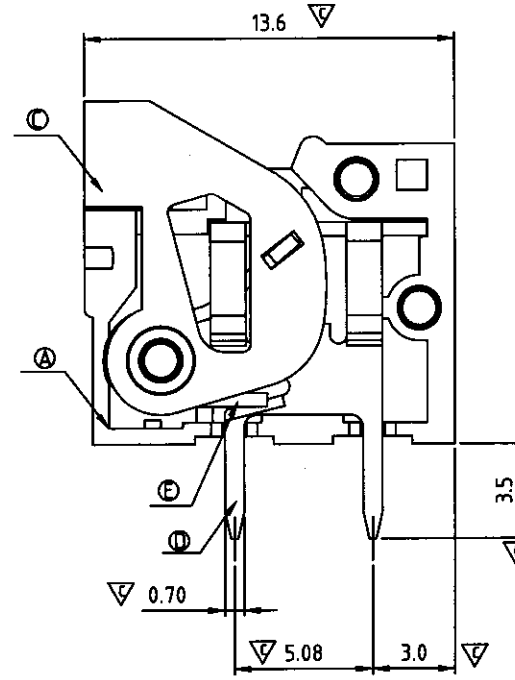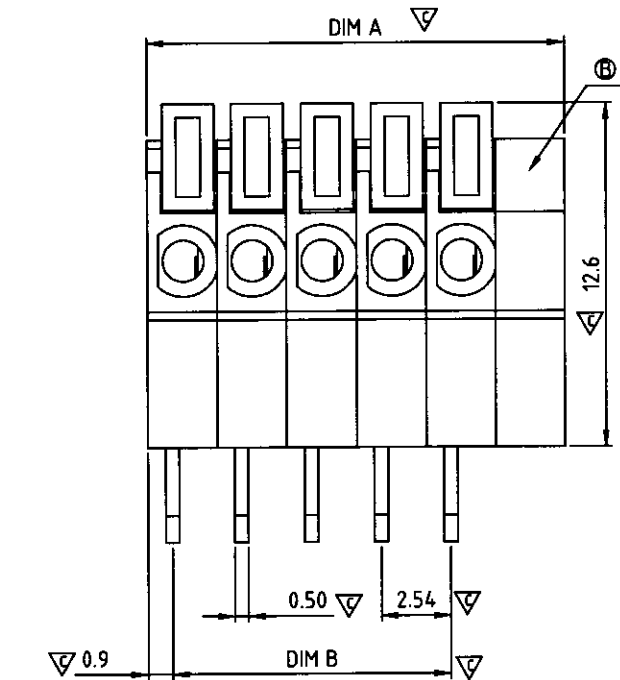

P.C.B. LAYOUT

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR, PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HA-2.54mm 180° Series			
PART NO.	HAxx51x0xxxxG		DWG NO.	8HA0502	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Da cheng 2012.10.16	Da cheng 2012.10.16		X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1°
SHEET: 01/01				UNIT: mm	SCALE: NONE
				REV: F	