



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/12'		LJC 05/08/12'
B	DRAWING UPDATE	JLZ 12/22/18'		

NOTES:

Specifications:

1. Contact resistance: 20mΩ Max.
2. Insulation resistance: 1000MΩ Min.
3. Dielectric withstanding voltage: 1000V AC(Rms) for 1 minute.
4. Current rating:2A.
5. Voltage rating:250V AC Rms.
6. Temperature: -40°C~+105°C.

Materials:

1. Contact material: Copper alloy.
2. Contact plating: Gold plating over nickel.
3. Insulator material: High temp,Black,UL94-V0.

Product number code:

DS1022-18- X - X X X X - X

Plating level(For gold flash)
B: Level B
3A: Level 3A

Table A & DIM. type
1: Type 1
2: Type 2
or A*.*-B*.*-C*.*-D*.*

Contact plating
F1: Full gold flash
6: Tin

Mounting type
R: R/A type

No. of power contacts
1x1~1x4

No. of signal contacts
2x1~2x39


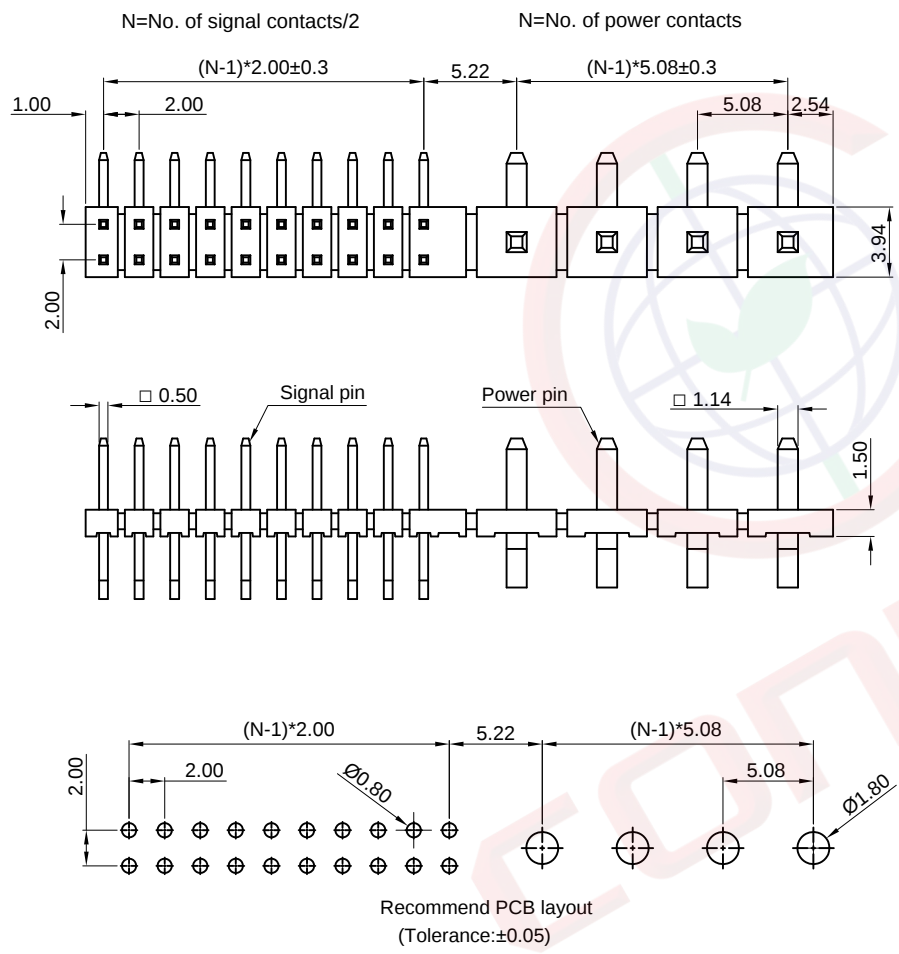


TABLE A:

TYPE	Dimension			
	A	B	C	D
1	4.00	1.27	2.30	3.04
2				

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	5.08mm PIN HEADER COMBINATION	
X.	±0.60	X.	±5°	UNITS	mm		2.00mm PIN HEADER R/A TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1022-18 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1022-18-X-XXXX-X-B						

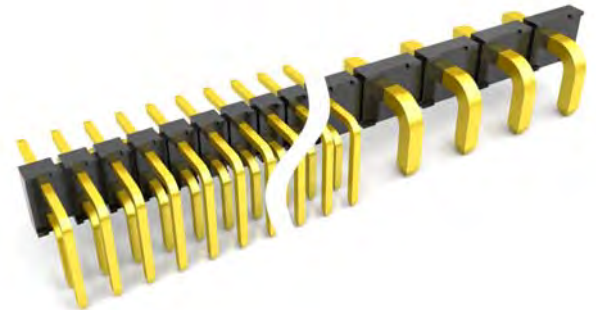

(Series Image-Reference Only)