



0.2A, 600V N-CHANNEL SUPER-JUNCTION MOSFET

DESCRIPTION

The UTC 02NM60 is an Super Junction MOSFET Structure and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient DC to DC converters and bridge circuits.

FEATURES

* $R_{DS(on)} < 17\Omega$ @ $V_{GS}=10V$, $I_D=0.1A$


* High breakdown voltage

ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
-	02NM60G-AA3-R	SOT-223	G	D	S	Tape Reel
-	02NM60G-AB3-R	SOT-89	G	D	S	Tape Reel
02NM60L-T92-B	02NM60G-T92-B	TO-92	G	D	S	Tape Box
02NM60L-T92-K	02NM60G-T92-K	TO-92	G	D	S	Bulk

Note: Pin Assignment: G: Gate D: Drain S: Source

02NM60G-AA3-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel, B: Tape Box, K: Bulk (2) AA3: SOT-223, AB3: SOT-89, T92: TO-92 (3) L: Lead Free, G: Halogen Free and Lead Free
---------------	--	--

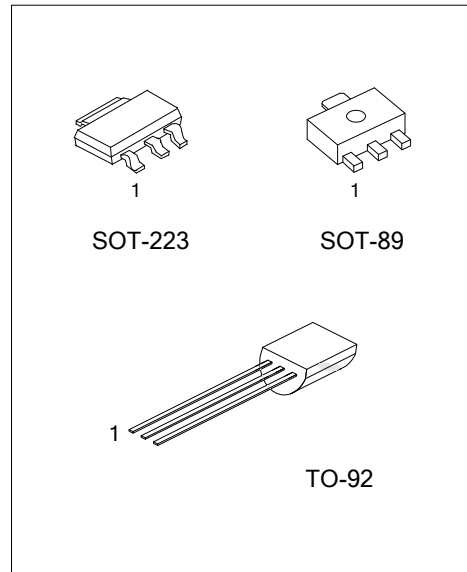

MARKING

PACKAGE	MARKING
SOT-223	02NM60G □□□ → Data Code 1
SOT-89	□□□□ ← Data Code 02NM60G 1
TO-92	UTC 02NM60□ □□□ → L: Lead Free → G: Halogen Free → Data Code 1

■ ABSOLUTE MAXIMUM RATINGS ($T_C=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DS}	600	V
Gate-Source Voltage		V_{GS}	± 30	V
Drain Current	Continuous	I_D	0.2	A
	Pulsed (Note 2)	I_{DM}	0.8	A
Power Dissipation	SOT-223	P_D	9	W
	SOT-89		3.3	W
	SOT-92		1.4	W
Junction Temperature		T_J	150	$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	$-55 \sim +150$	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ_{JA}	150	$^{\circ}\text{C/W}$
	SOT-89		180	$^{\circ}\text{C/W}$
	SOT-92			
Junction to Case	SOT-223	θ_{JC}	14	$^{\circ}\text{C/W}$
	SOT-89		38	$^{\circ}\text{C/W}$
	SOT-92		88	$^{\circ}\text{C/W}$


■ ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	600			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =600V, V _{GS} =0V			10	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+30V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-30V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2.5		4.5	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =0.1A			17	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz		26		pF
Output Capacitance		C _{OSS}			18		pF
Reverse Transfer Capacitance		C _{RSS}			4		pF
SWITCHING PARAMETERS							
Total Gate Charge (Note 1)		Q _G	V _{DS} =50V, V _{GS} =10V, I _D =1.3A, I _D =100μA (Note 1, 2)		6		nC
Gate to Source Charge		Q _{GS}			1		nC
Gate to Drain Charge		Q _{GD}			2		nC
Turn-ON Delay Time (Note 1)		t _{D(ON)}	V _{DS} =30V, V _{GS} =10V, I _D =0.5A, R _G =25Ω (Note 1, 2)		38		ns
Rise Time		t _R			21		ns
Turn-OFF Delay Time		t _{D(OFF)}			34		ns
Fall-Time		t _F			27		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				0.2	A
Maximum Body-Diode Pulsed Current		I _{SM}				0.8	A
Drain-Source Diode Forward Voltage (Note 1)		V _{SD}	I _S =0.2A, V _{GS} =0V			1.4	V


Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

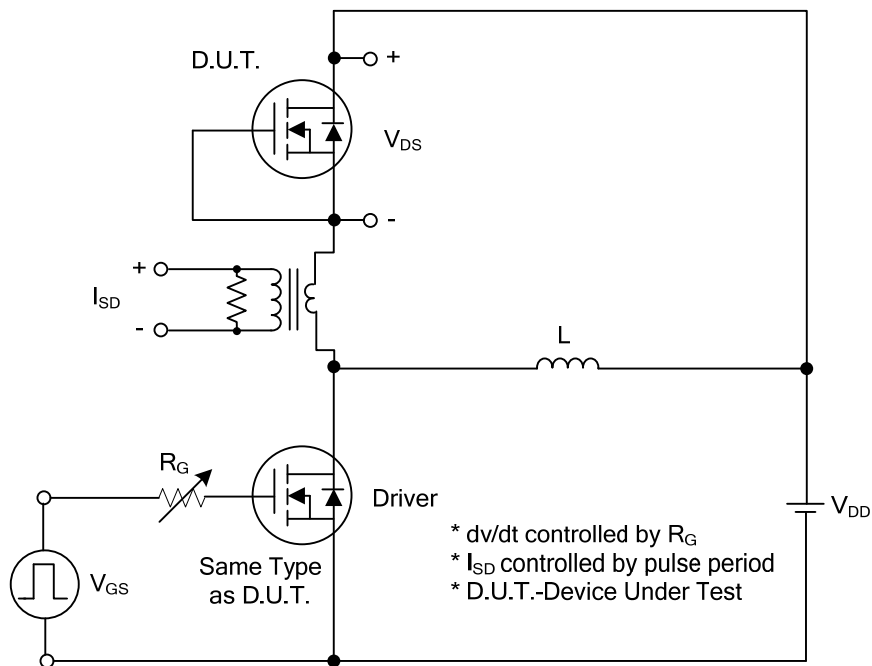


Peak Diode Recovery dv/dt Test Circuit

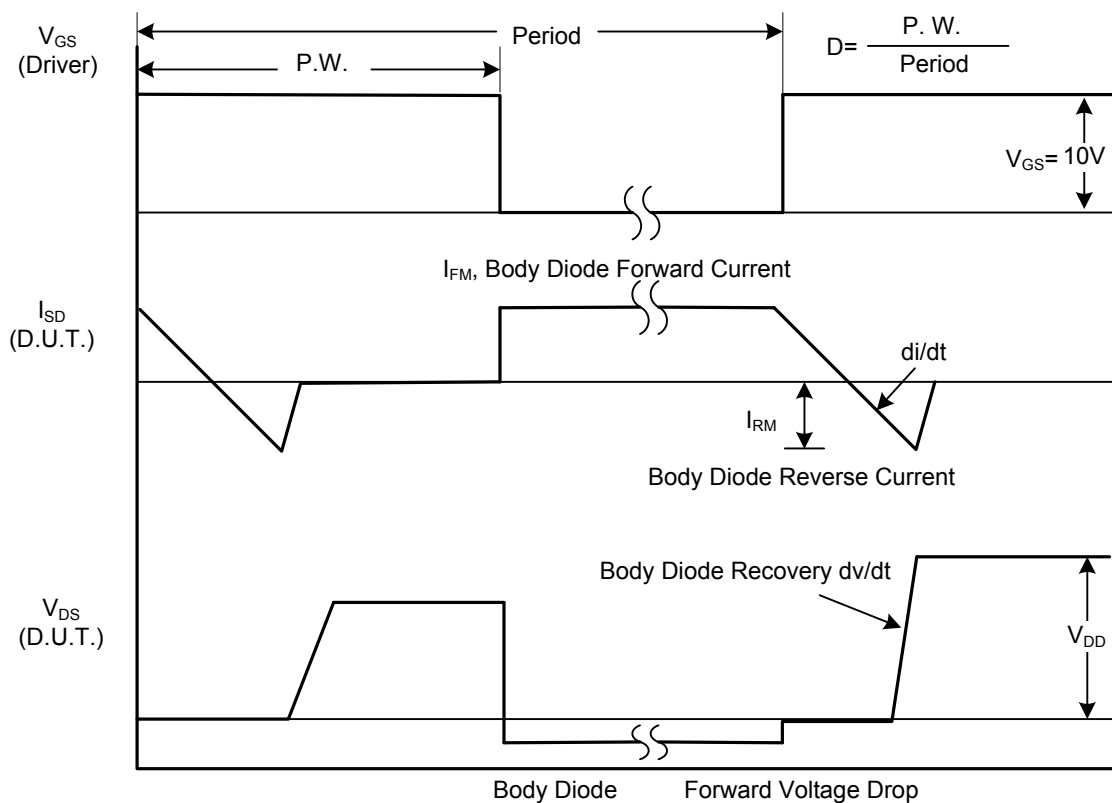


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS (Cont.)

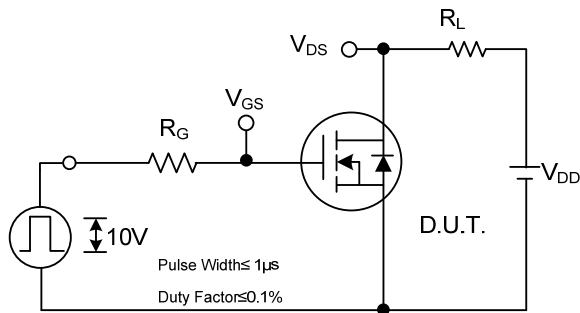


Switching Test Circuit

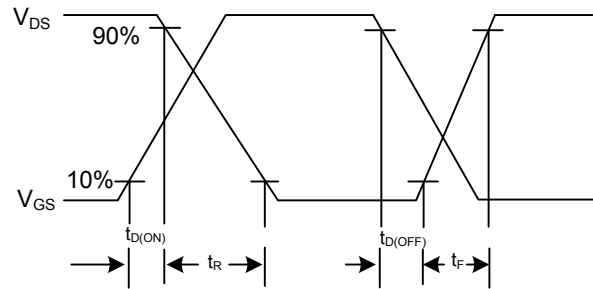


Switching Waveforms

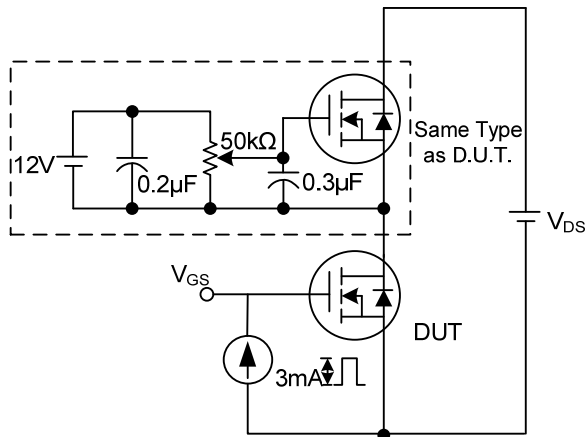


Gate Charge Test Circuit

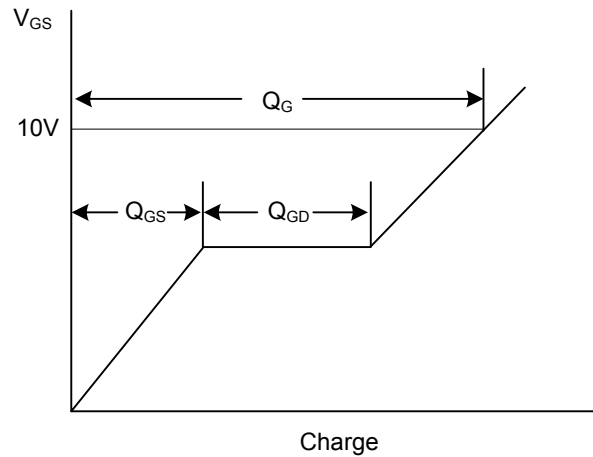

Gate Charge Waveform

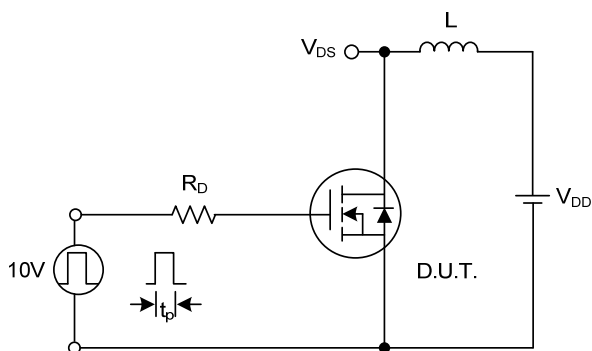

Unclamped Inductive Switching Test Circuit

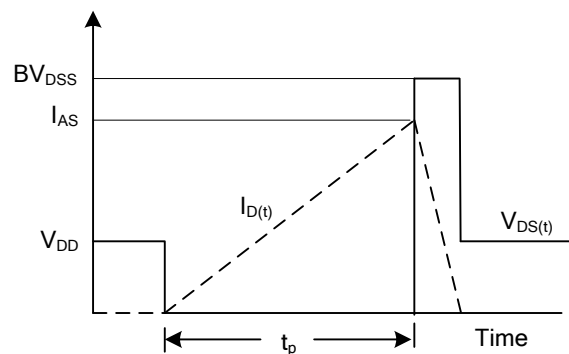

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.