

A
B
C
D
E
F
G
H

1 2 3 4 5 6 7 8



Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of any part of this document without the prior written consent of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

NOTES:

1. SPECIFICATIONS

- . Contact Rating: 100mA at 30Vdc
- . Insulation Resistance:100MΩ min.
- . Contact Resistance:100mΩ max.
- . Dielectric Withstanding Voltage: 250V AC(rms) for 1 minute.
- . Operating Life:10,000 cycles
- . Travel:1.5±0.3mm
- . Operation Temperature Range: -25°C to +70°C

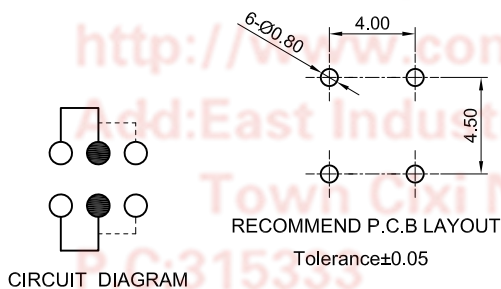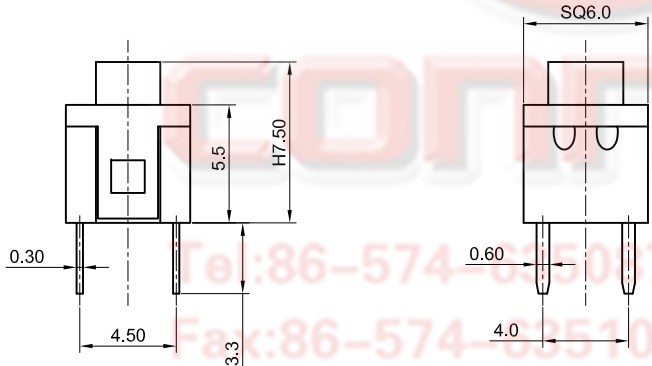

CIRCUIT DIAGRAM

RECOMMEND P.C.B LAYOUT

Tolerance±0.05

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/08/18'		

- . Wave Soldering: Recommended Solder Temperature At 500°f(260°C)max. 5 Seconds
- . Hand Soldering: Use Soldering Iron Of 30 Watts,Controlled At 608°f(320°C)Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1041-06 - X X X X X X X

- Operating Life
1: 10,000 cycles
- Lock Support
S: Lock Type
- Operating force
200: 200gf
- Packing type
A: polybag
- Actuator color
V: Ivory
- Housing color
K: Black
- Profile Height
075:7.5mm
- No. of contacts
4: 4 pos

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	6.0*6.0*7.5mm Lock Switch 4P DIP	
X.	±0.60	X.	±5°	UNITS	mm		Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1041-06 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1041-06-XXXXXXXX-A							