



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Product Specification Approval Sheet

Product Name: SAW Filter 836.5 MHz SMD 3.0X3.0 mm(BW=25MHz)

TST Parts No.: TA0968B

Customer Parts No.: _____

Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Anne Chen

Approved by: _____ Andy Yu

Date: _____ 01, 14, 2020

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 836.5MHz

MODEL NO.:TA0968B

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40 °C to +85 °C
4. Storage Temperature: -40 °C to +95 °C
5. Moisture Sensitivity Level: Level 1 (MSL 1)

RoHS Compliant

Lead-free soldering


Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Type.	Max.	Note
Center Frequency F_c	MHz	-	836.5	-	-
Insertion Loss (824 ~ 849 MHz) IL	dB	-	2.5	3.2	-
Amplitude Ripple (824 ~ 849 MHz)	dB	-	0.9	1.7	-
VSWR (824 ~ 849 MHz)		-	1.7	2	-
Relative Attenuation (relative to 0 dB)					
10 ~ 800 MHz	dB	30	51	-	-
869 ~ 894 MHz	dB	17	26.5	-	-
894 ~ 920 MHz	dB	34	39	-	-
920 ~ 1210 MHz	dB	40	60	-	-
1210 ~ 1500 MHz	dB	30	58	-	-
1500 ~ 2000 MHz	dB	25	45	-	-
2000 ~ 2600 MHz	dB	20	33	-	-
2600 ~ 3000 MHz	dB	15	28	-	-


C. MEASUREMENT CIRCUIT:

HP Network analyzer

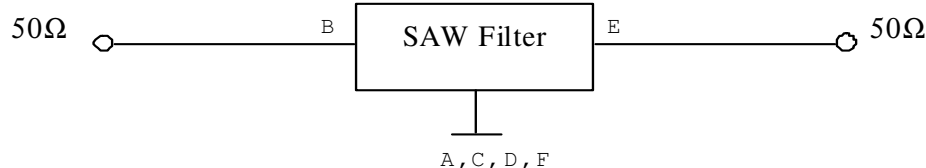

TAI-SAW TECHNOLOGY CO., LTD.


D.OUTLINE DRAWING:

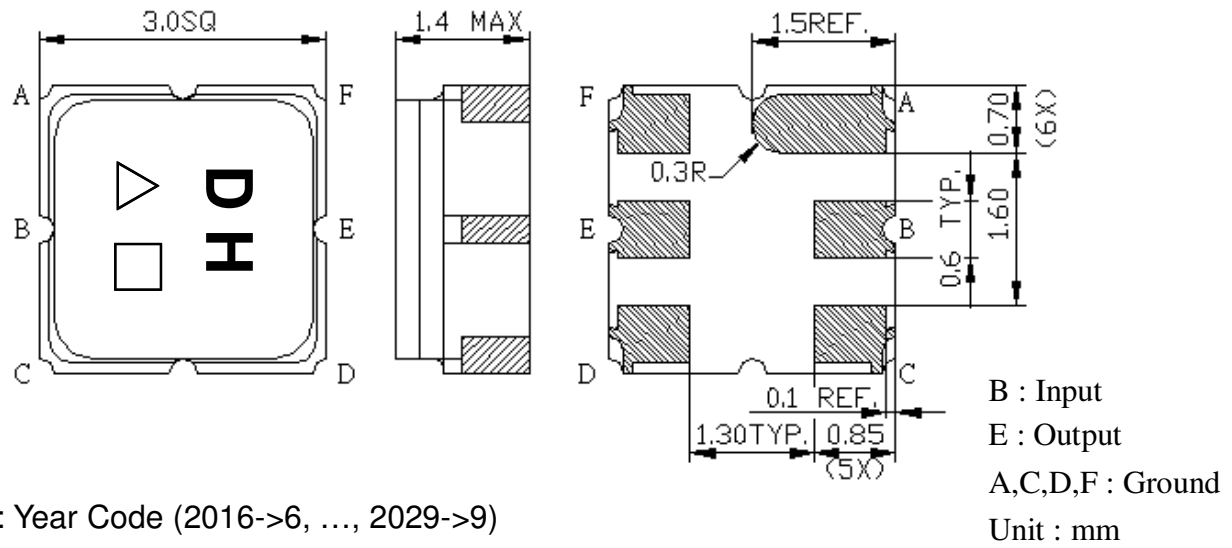



Date Code Table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

E. PCB Footprint:


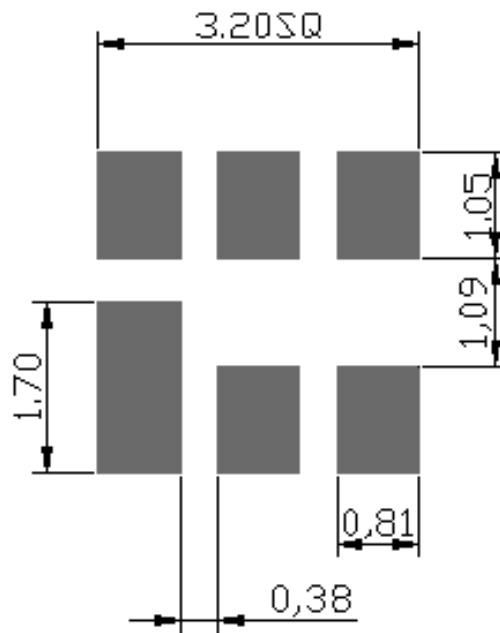


F. Frequency Characteristics :

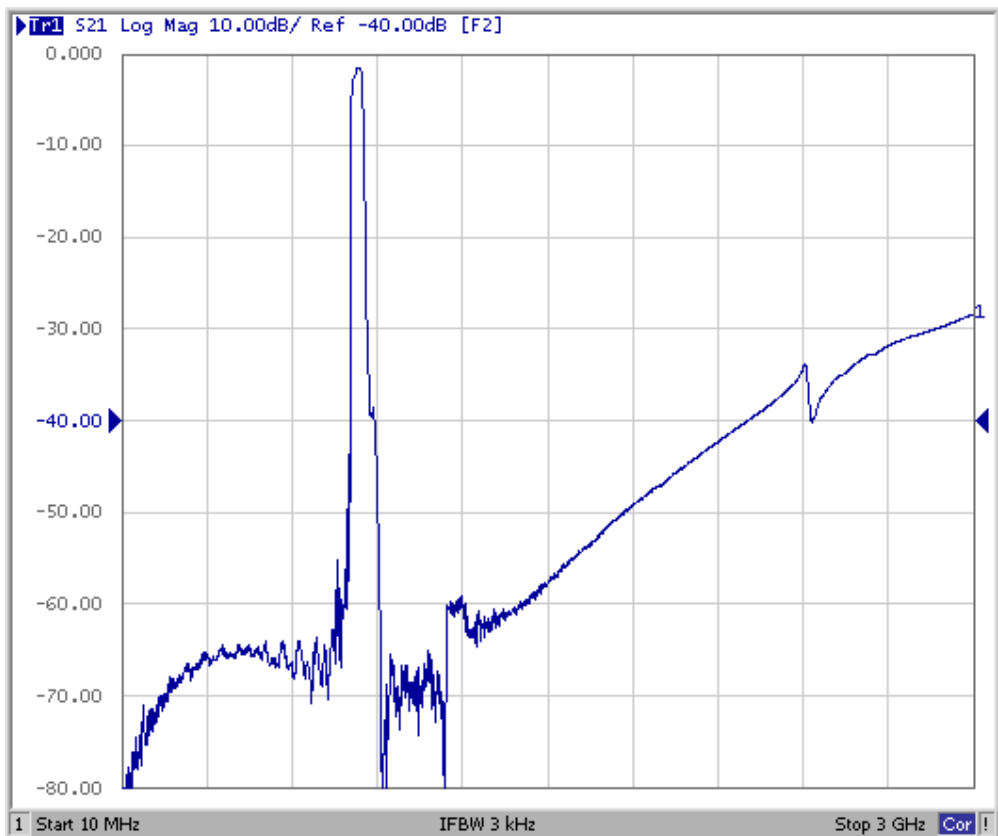
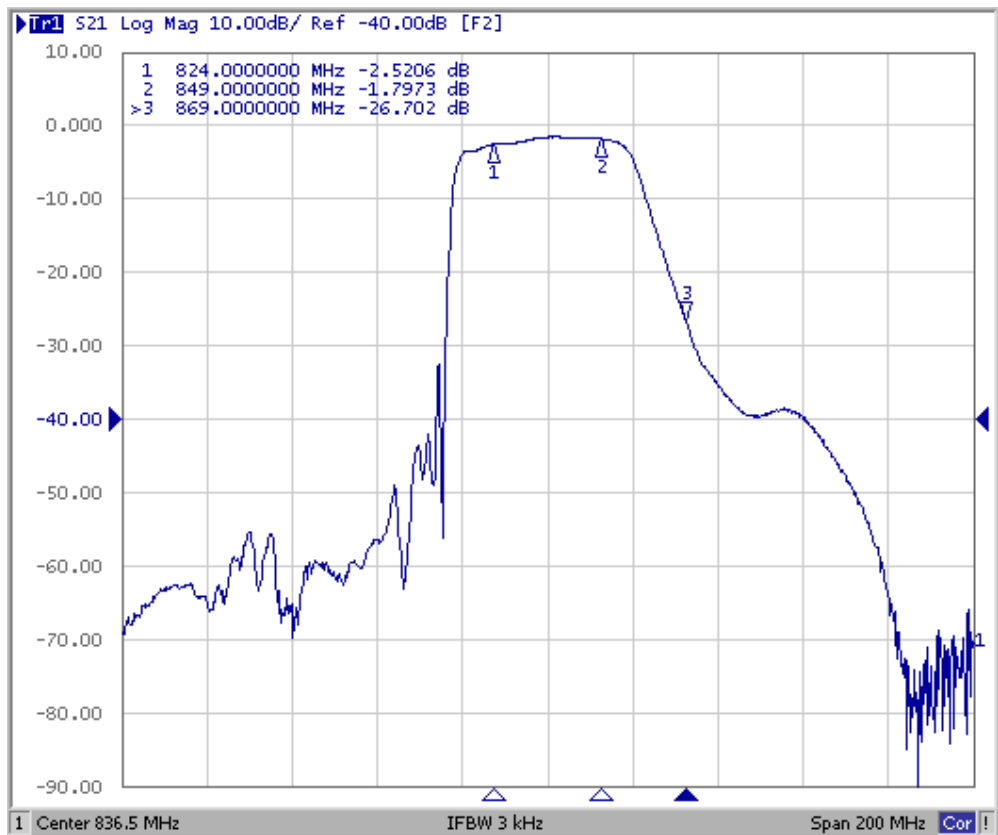


Reflections Functions :

S11 VSWR

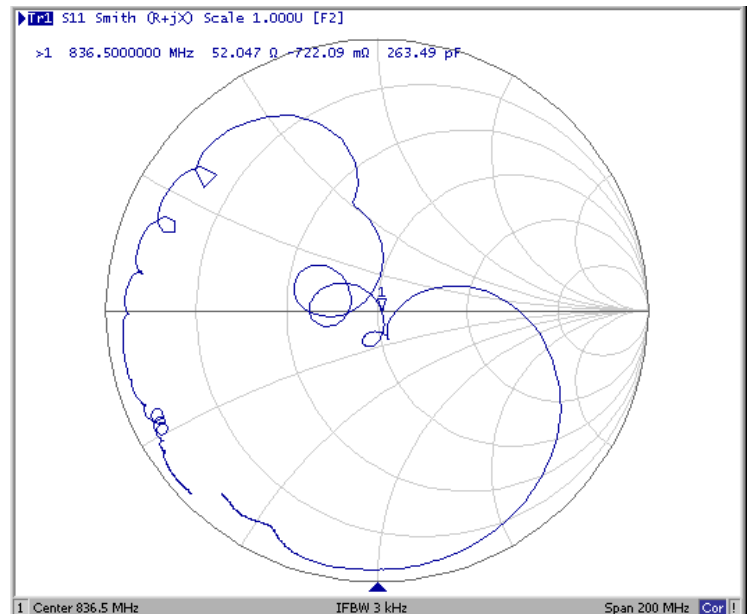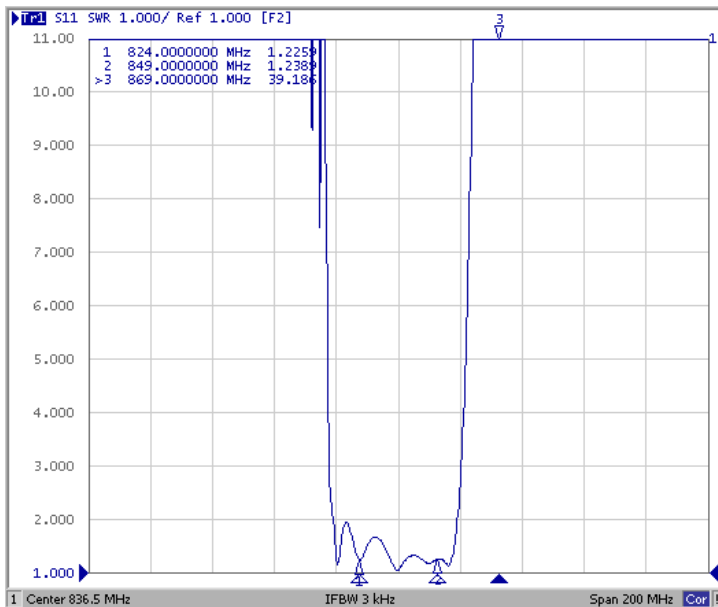


S22 VSWR

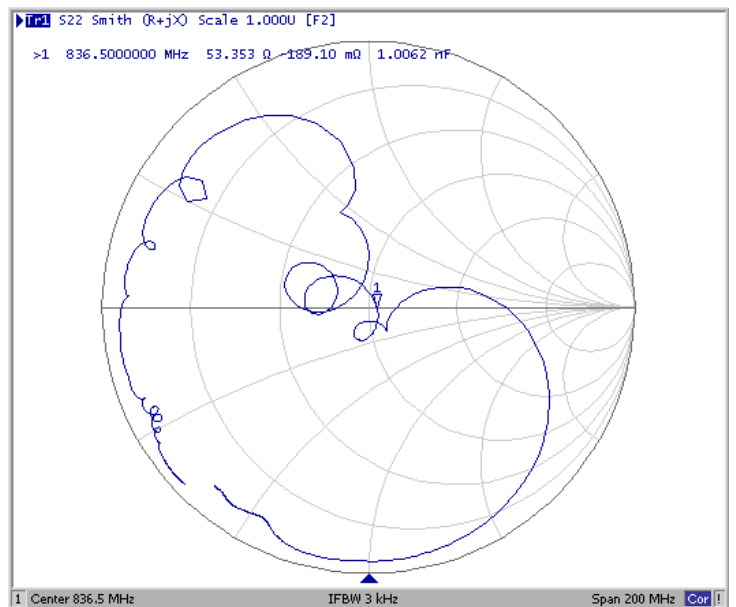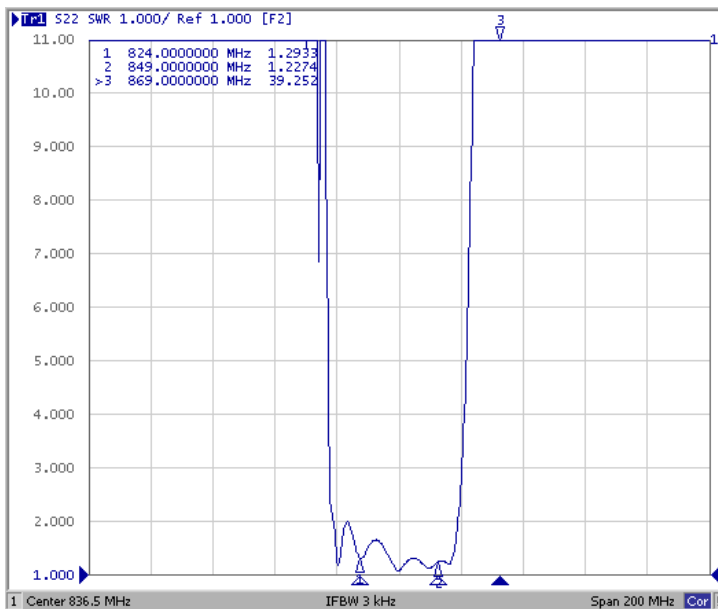

G. PACKING:


1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

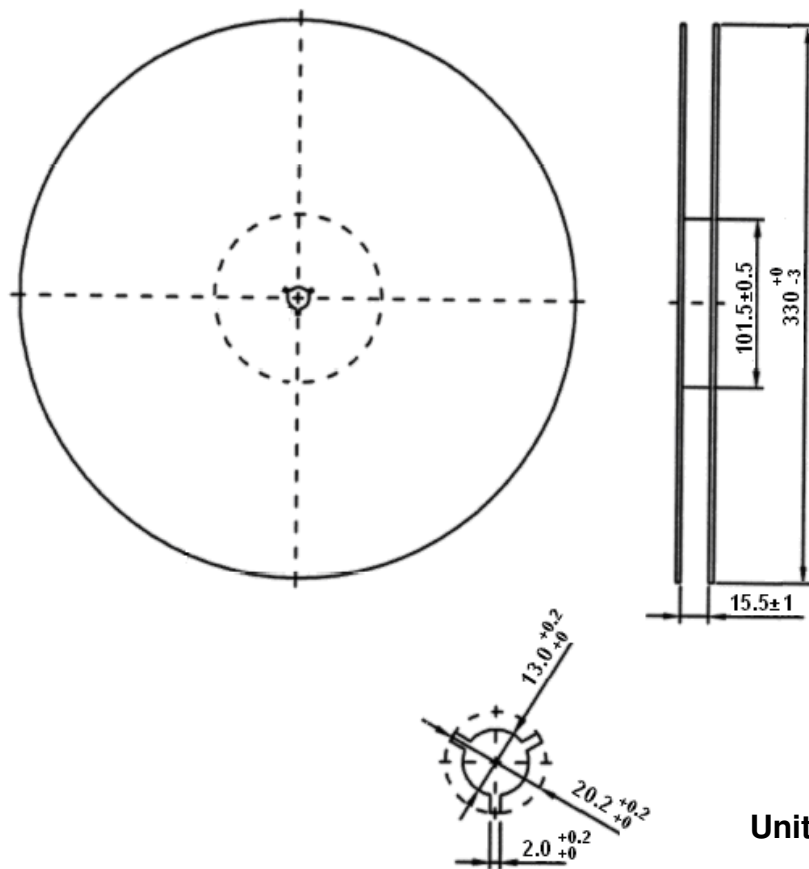

Unit: mm

2. TAPE DIMENSION

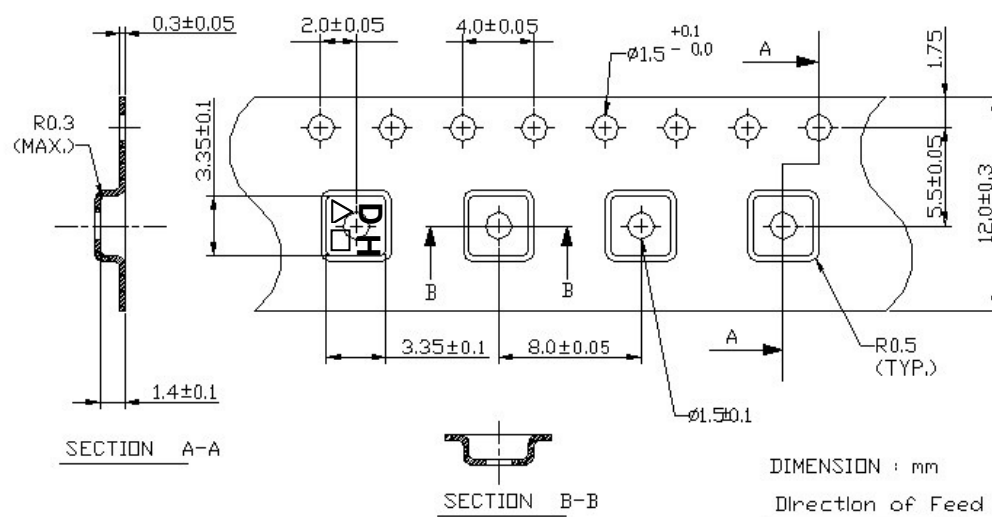

TAI-SAW TECHNOLOGY CO., LTD.

TST DCC
Release document

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

