
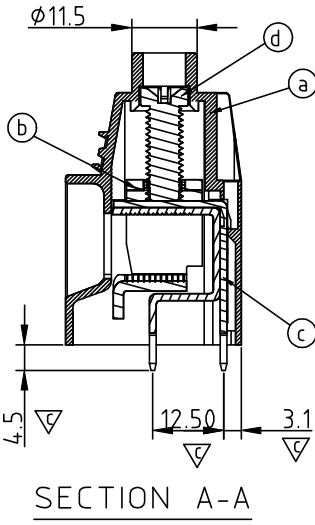
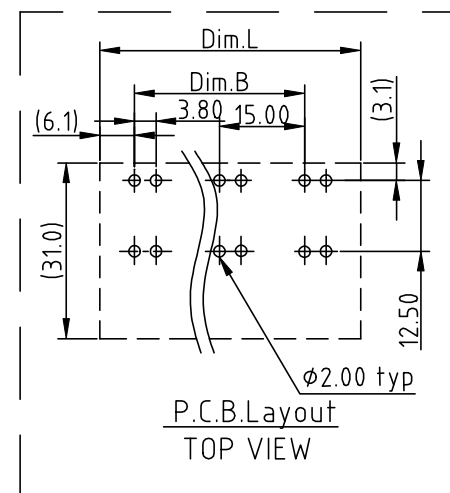
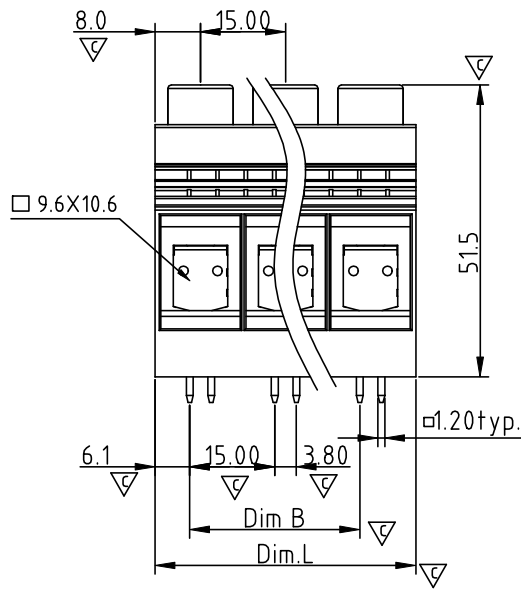


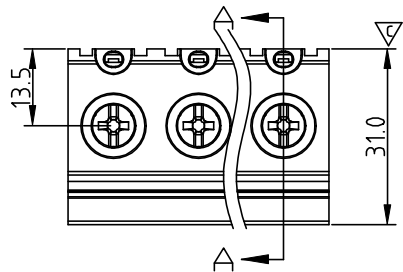

Dimension L&B

DIM B	(N-1)×15.0
DIM L	(N-1)×15.0+16

N=Number of poles

Poles	L&B Tolerance
1P-2P	±0.30
3P-4P	±0.50
5P-10P	±0.80

SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal housing :Thermoplastic (UL 94V-0)
- Item ② Clamp : Steel Stamping , Zinc plated
- Item ③ Wire guard solder pin : Copper , Tin plated
- Item ④ Terminal screw: Steel Zinc plating"+/-"slot type
- Electrical Use group B&C Use group D
- Voltage rating: 600V 600V
- Current rating: 127A 5A
- Wire range: 1-20
- Torque: Lb-In (N.m): 34-36.5 (3.8-4.1)
- Screw: M6
- Wire strip length: 19-20mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40° C to +115° C
- Soldering temperature: 260° C±5° C/5 Sec
- Safety Approval:
- Critical dimension:

K9 xx C 3 x 3 0 xxx G

- 01 1 POLES
- 02 2 POLES
- 03 3 POLES
-
- 10 10 POLES

- 0 Black
- 2.Red
- 3.Orange
- 4.Yellow
- 5 Green (RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey (RAL7004/P)
- 9 White
- C: Green(RAL 6018/U)

- 000:"@ "Logo (Standard)
- 00A:"ANYTEK"Logo
- Any special item by customer request, please contact sales department.
- G RoHS compliant (lead<4%) In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K9 15.0 Series without flange (Double-handed)" + / - " slot type							
PART NO.	K9xxC3x30xxxG			DWG NO.	8K90005			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance
		Guoxue 2014.03.10	Guoxue 2014.03.10		UNIT: mm	X. ±0.50		
					SCALE: NONE	X.X ±0.30		
						X.XX ±0.10		
						X* ±1*		
SHEET: 01/01				REV.: B				