





SIGN	DATE	DESCRIPTION	APPROVER
△	01/20'07	The Soldering temperature from 245° to 250°	Aaron
△	10/29'08	ADD Tolerance	Seamus
△	09/12'12	Up date the drawing	Da cheng
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

△Material

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal cover: Thermoplastic (UL94V-0)
- Item ③ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
- Item ④ Female long contact : Brass. Tin Plated
- Item ⑤ Spring clamp : Stainless steel

Electrical cULus

- Voltage rating: 150VAC
- Current rating: 2A
- Wire range:
 - Solid wire(AWG): 20-26
 - Stranded wire(AWG): 20-26
 - Wire strip length: 9-10mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C △
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: △

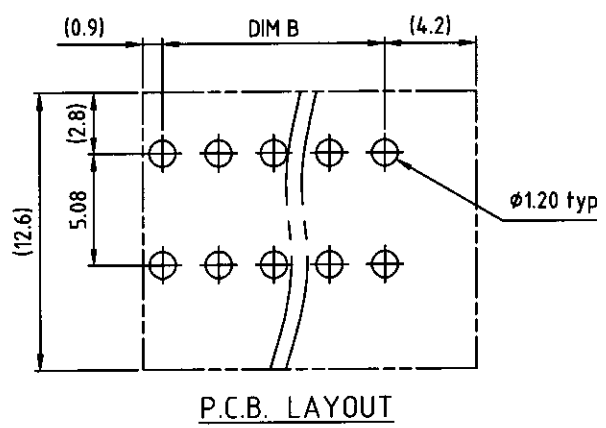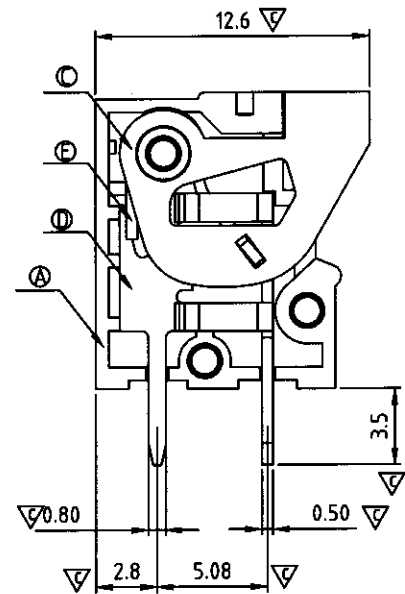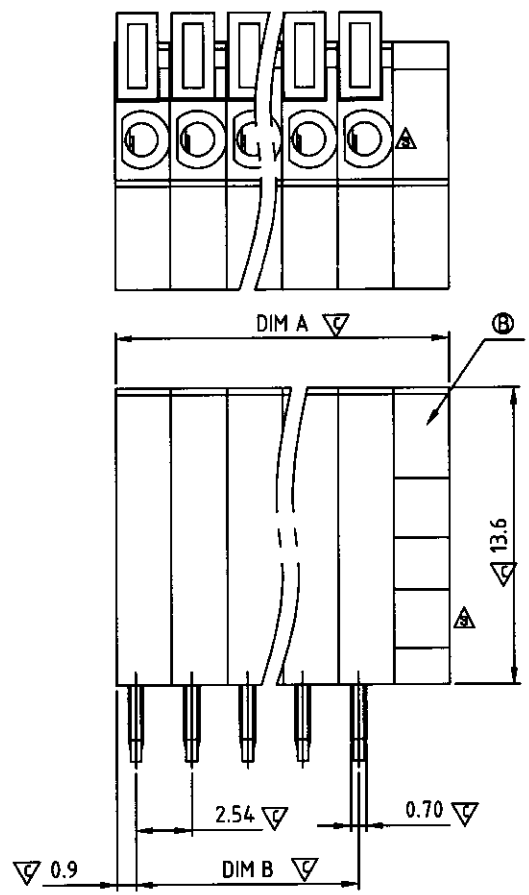

Dimension

DIM A	(N+1)×2.54
DIM B	(N-1)×2.54

N=Number of poles △

POLES	DIM A	DIM B
2p-8p	±0.15	±0.15
9p-12p	±0.25	±0.25
13p-18p	±0.30	±0.30
19p-24p	±0.40	±0.40

HA xx 50 x 0 xxxx G

No. OF POLES
02 2 POLES
03 3 POLES
...
24 24 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Gray(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHS compliant (lead<4%)
In copper Alloy
0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HA-2.54mm 90° Series	
PART NO.	HAxx50x0xxxxG	DWG NO.	8HA0501
APPROVED	CHECKED	DESIGNED	DRAWN
Da cheng 2012.09.12		Da cheng 2012.09.12	
SHEET: 01/01		Tolerance	
UNIT: mm		X. ±0.50	
SCALE: NONE		X.X ±0.30	
REV.: F		X.XX ±0.10	
		X* ±1*	