

Lithium Manganese Battery Technology Specification

Customer _____

Part name Lithium Manganese Battery

Model No CR123A 1500mAh 3.0V

Serial No _____

Produce No _____

Approved by		Drafted by	Wenfei liang
Checked by		Signed by	Xiaojun Nie
Prepared by		Valid Date	2018-08-20

Company address: 4th Building, Meitai Technology Park, Guanguang
Road, Longhua, Shenzhen, China.

(Tel) : +86-755-86670672

(Fax) : +86-755-86670609

E-mail: pkcell@pkcell.net pkcell@pkcell.com

Website: <http://www.pkcell.net> <http://www.pkcell.com>

ADD: 4th Building, Meitai Technology Park, Guanguang Road, Longhua, Shenzhen, China. 518110

1. SCOPE

The specification applies to CR123A (Li/MnO₂) battery supplied by Shenzhen pkcell battery Co.,Ltd

2. Characteristics and Performance

Table1


Item	Storage	Performance	Test condition
Nominal Voltage	—	3.0V	—
Normal capacity	—	1500mAh	Continuous Discharge at 10mA To 2.0V at 20±3℃
Max.Constant Current	—	1500mA	—
Max. Pulse Current	—	3000mA	—
Working temperature	—	-40~+85℃	—
OCV	Fresh	3.10V~3.30V	DC Voltmeter: accuracy ≥ ±0.005V Input impedance ≥ 1MΩ
	After 12 months	3.10V~3.30V	
CCV	Fresh	≥3.00V	DC voltmeter: accuracy ≥ ±0.005V load: 15kΩ for 0.8 sec.
	After 12 months	≥3.00V	

3. Precautions

- Never charge the battery as it is not designed to be rechargeable, may cause leakage or explosion.
- Insert battery with its positive and negative terminals properly aligned with the corresponding marks on the equipment.
- Never short circuit, heat, incinerate or dismantle the battery.

- 2 -

Fig1. Structure and Dimensions

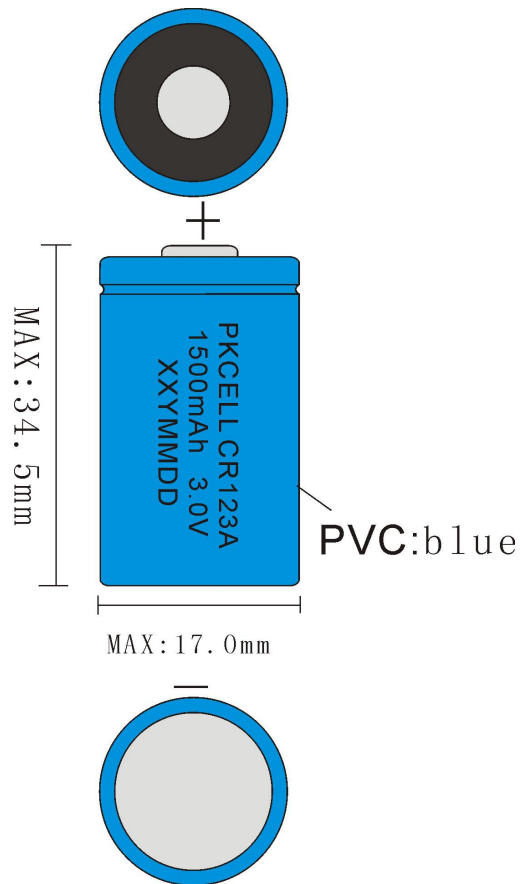

- 3 -

.....END.....