



TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District,
Tao-Yuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

<http://www.taisaw.com>

Approval Sheet For Product Specification

Issued Date: 02/18/2003

Product Name: SMD7x5 44MHz Crystal Resonator

TST Part No.: TZ0182A

Customer Part No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Issued by: _____ Robert Chang

Approved by: _____ TF Yang

Date: _____ 02/18/2003



SMD7x5 Crystal Resonator

MODEL NO.: TZ0182A

REV. NO.: 1

RoHS Compliant
Lead free
Lead-free soldering


Electrical Specifications:

	Specification
Nominal Frequency	44.000000 MHz
Mode of Vibration	Fundamental Mode
Storage Temperature Range	-40°C to +85°C
Operating Temperature Range	-20°C to +70°C
Frequency Stability over Operating Temperature	+/-15 ppm
Frequency Make Tolerance	+/-15 ppm @ 25°C +/- 3°C
Resonance Resistance(R)	25 Ω max.
Shunt Capacitance (Co)	7 pF max
Drive Level	100 uW nominal
Load Capacitance-CL	18.0 pF
Aging	+/-3.0 ppm/year @25°C
Marking	Laser marking
Insulation Resistance	500M Ω min at DC 100V


Mechanical Dimensions (mm):	Marking:
7.2 MAX 5.2 MAX Marking 1.2(Ref.) 2.54±0.2 #1 #2 #4 #3 4.60±0.2 Bottom 1.1±0.2 1.0(Ref.) #2 & #4 GND	44.000 182(T) ZD “D” is date code

PACKING:

1. REEL DIMENSION (Unit: mm)

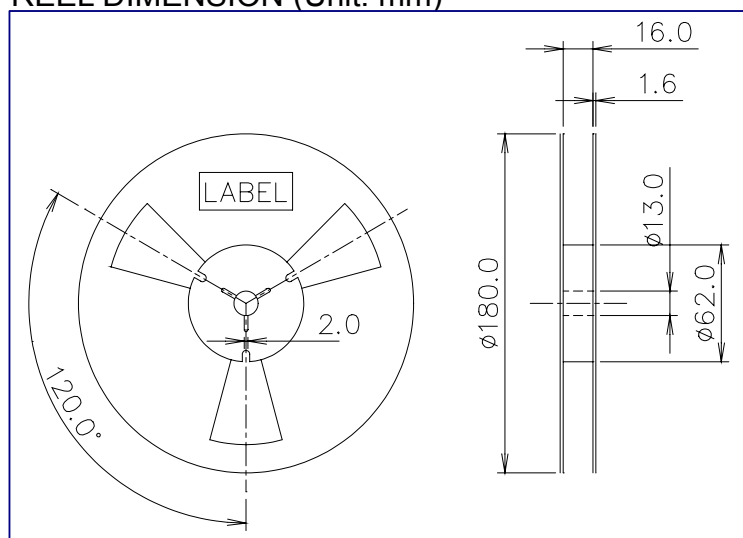

2. TAPE DIMENSION (Unit: mm)

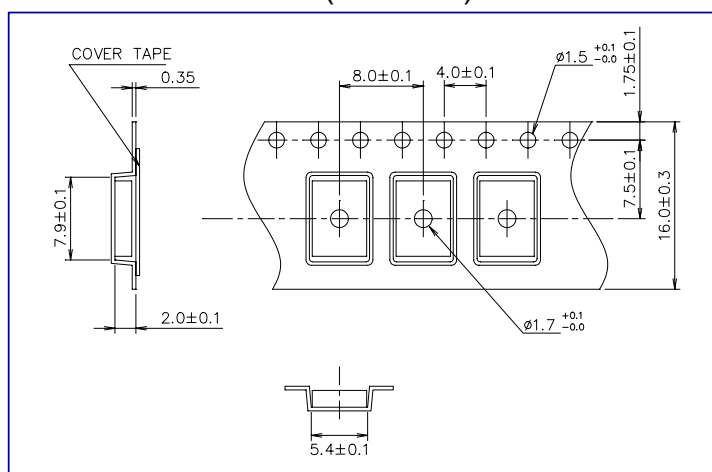

3. PACKING DIRECTION

The dot or the logo of marking should be close to the hole of tape.

Product Code Table

Year	2001 2005	2002 2006	2003 2007	2004 2008
Product Code	Z	z	<u>Z</u>	<u>z</u>

Date Code Table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z