



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1880 MHz (BW 60MHz) SMD 1.1X0.9mm

TST Parts No.:TA2632A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by : _____

Date:_____

Checked by:_____ Michael Yang *Michael*

Approval by:_____ Andy Yu *Andy Yu*

Date:_____ 2021/05/28

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.

TAI-SAW TECHNOLOGY CO., LTD.

TST DCC
Release document

FR-71S03-02



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1880 MHz (BW 60Hz) SMD 1.1x0.9x0.5mm

MODEL NO.:TA2632A

REV. NO.:2.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 3(MSL3)



Electrostatic Sensitive Device (ESD)


B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min	Type.	Max	Note
Center Frequency Fc	MHz	-	1880	-	
Insertion Loss (1850~1910 MHz) IL	dB		2.4	3.8	
Amplitude ripple (1850~1910 MHz)			1.3	2.7	
VSWR (1850~1910 MHz)			2.0	2.5	
Attenuation					
DC ~ 1570 MHz	dB	20	25		
1570 ~ 1580 MHz	dB	24	28		
1580 ~ 1770 MHz	dB	24	28		
1770 ~ 1829.4 MHz	dB	10	23		
1930.6 ~ 1989.4 MHz	dB	27	35		23~ 27°C
1989.4 ~ 3000 MHz	dB	23	28		
3000 ~ 4000 MHz	dB	14	21		
4000 ~ 6000 MHz	dB	4	9		
Temperature coefficient	ppm/°C	-36			
Package size	mm	SMD 1.1x0.9			


The PCB loss of demo-B is -0.2dB

C.FREQUENCY CHARACTERISTICS:


S21 response: (span 500MHz)

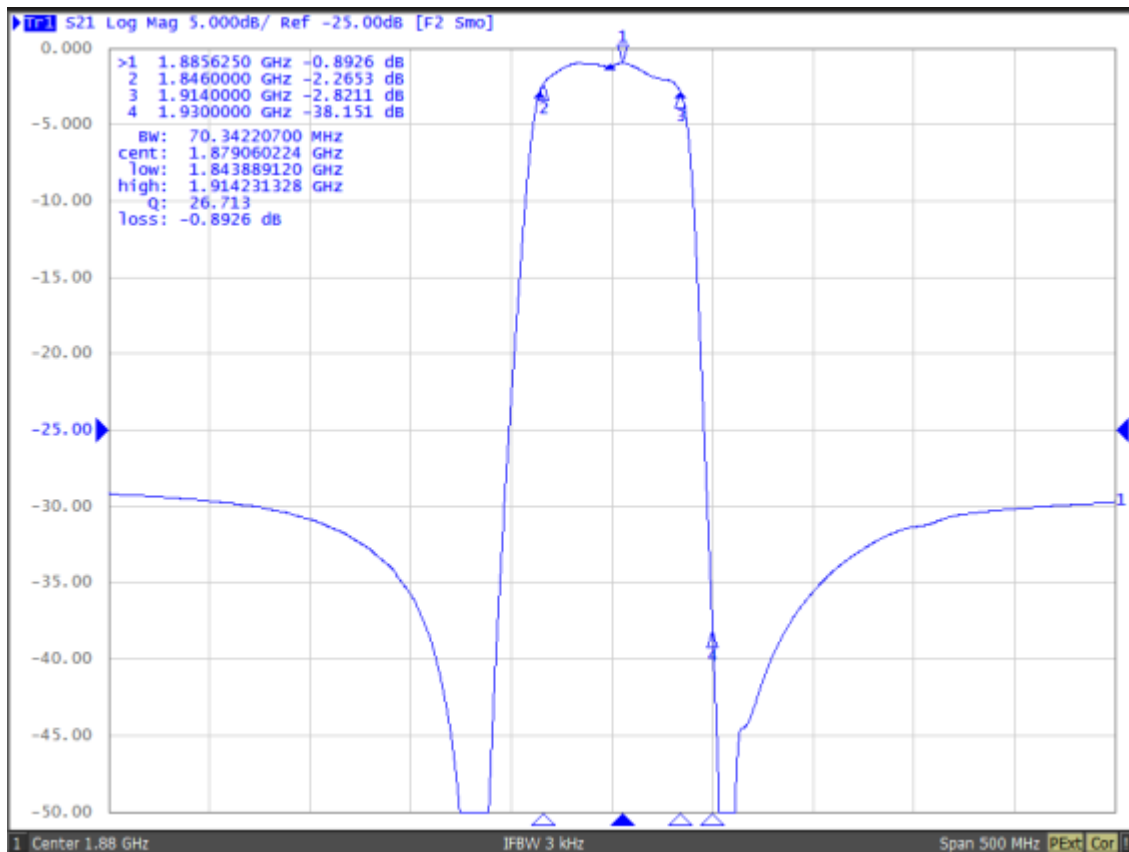



S21 response: (span 200MHz)

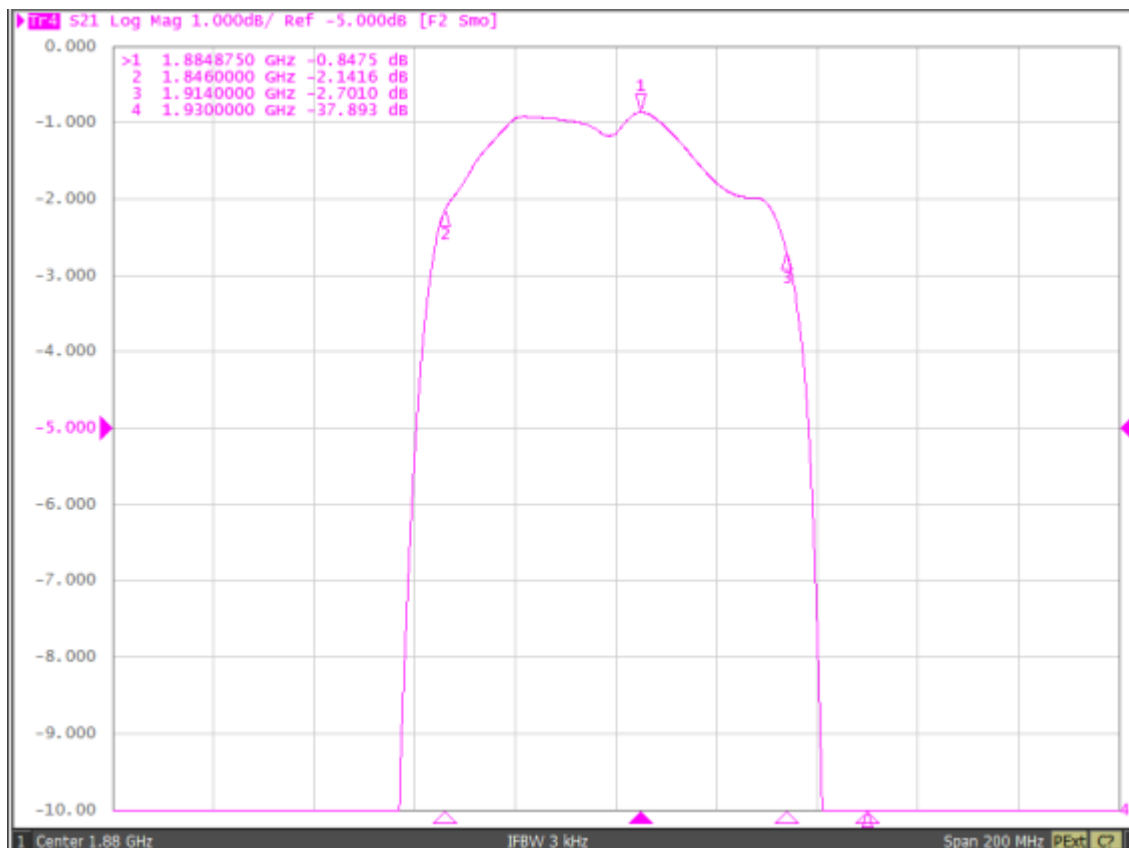



S21 response: (span 4.5GHz)

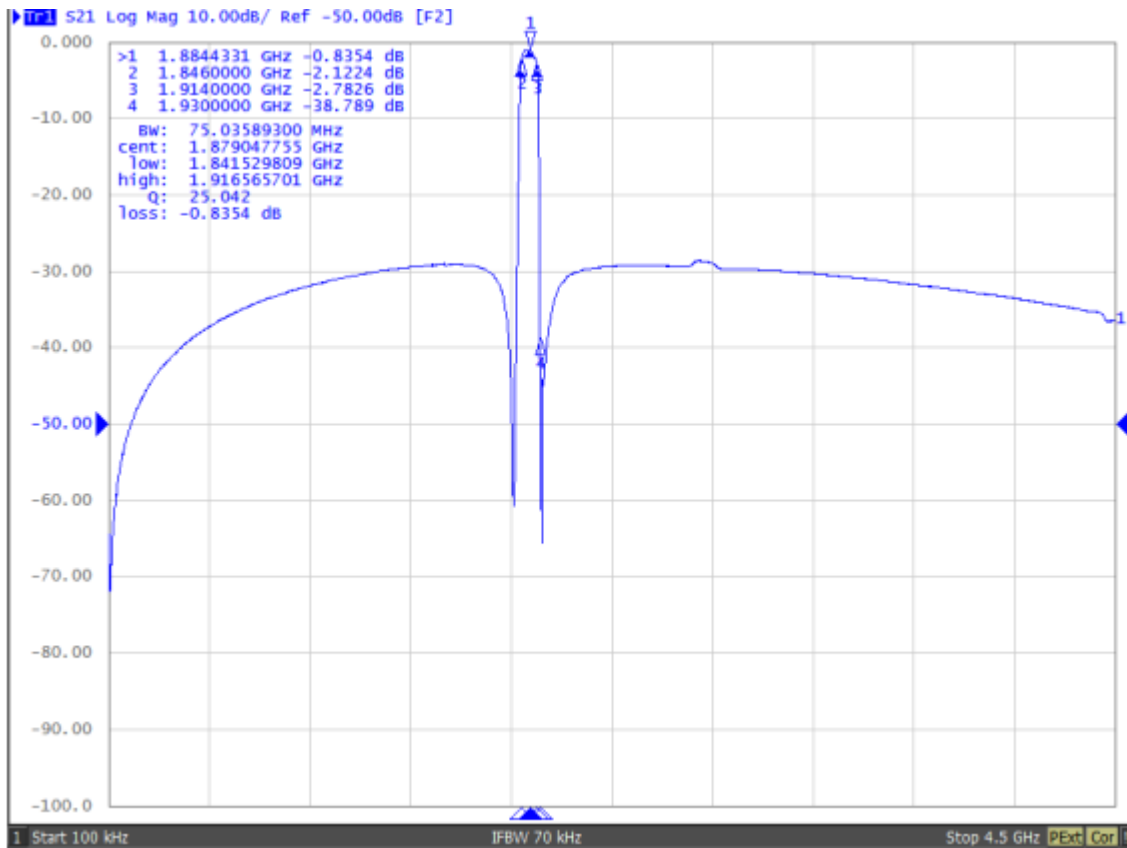

S11/S22 response:

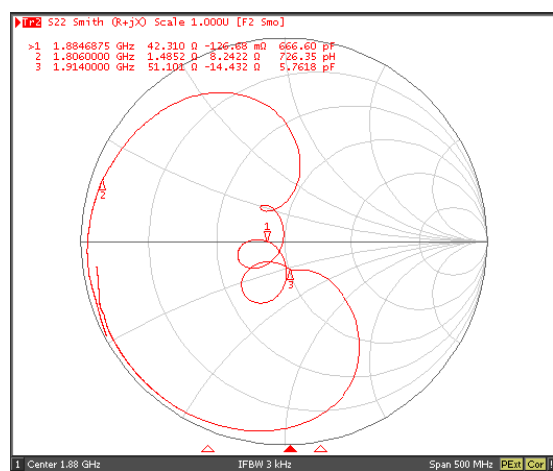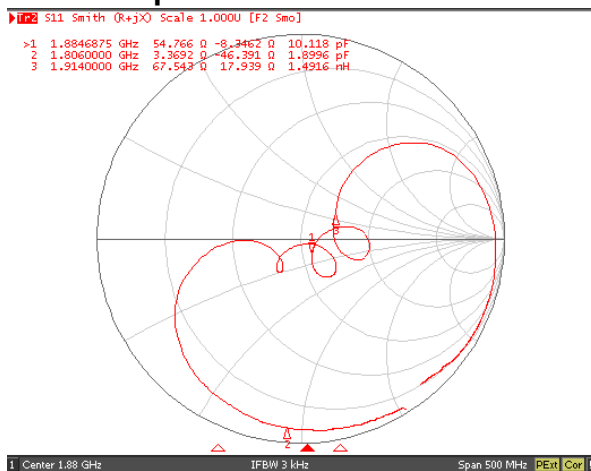


D. OUTLINE DRAWING:

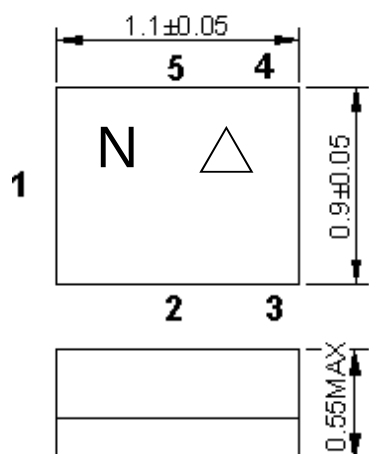

All tolerances are ± 0.05 mm unless otherwise specified
Coplanarity : 0.1 mm max.

1 to 5 : Pin No.

Unit : mm

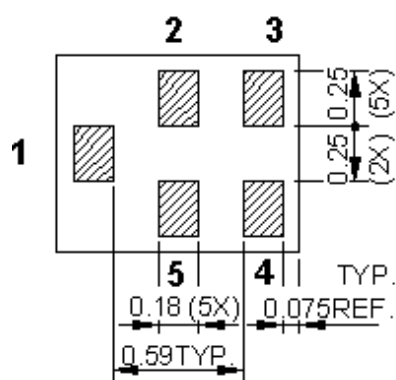


Pin No.	Symbol	Function
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground


Δ : Year/Month Code (Follow the table)

YEAR/Month	1	2	3	4	5	6	7	8	9	10	11	12
2013/2021	A	B	C	D	E	F	G	H	J	K	L	M
2014/2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015/2023	a	b	c	d	e	f	g	h	j	k	l	m
2016/2024	n	p	q	r	s	t	u	v	w	x	y	z
2017/2025	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2018/2026	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2019/2027	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>i</u>	<u>k</u>	<u>l</u>	<u>m</u>
2020/2028	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

E. MEASUREMENT CIRCUIT:

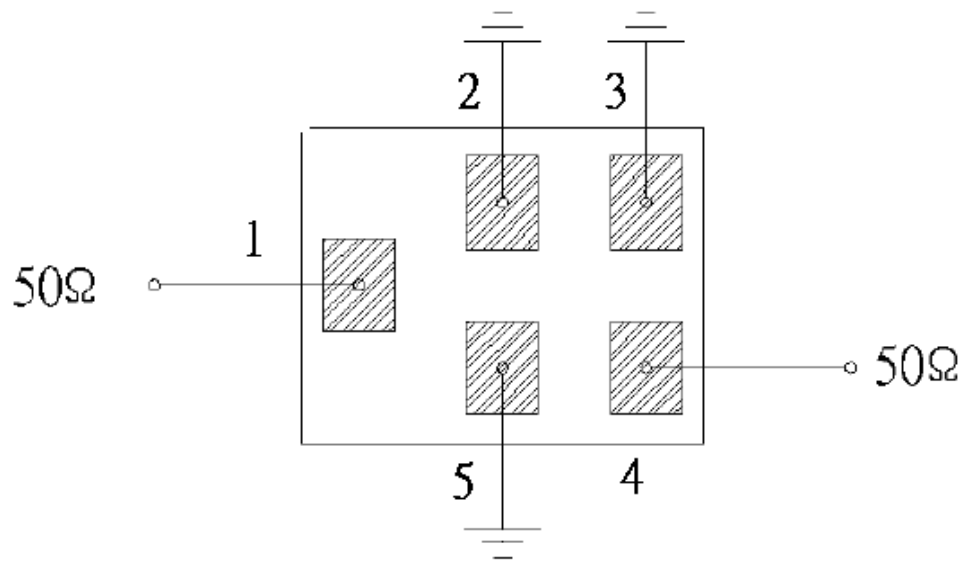


F. PCB Footprint:

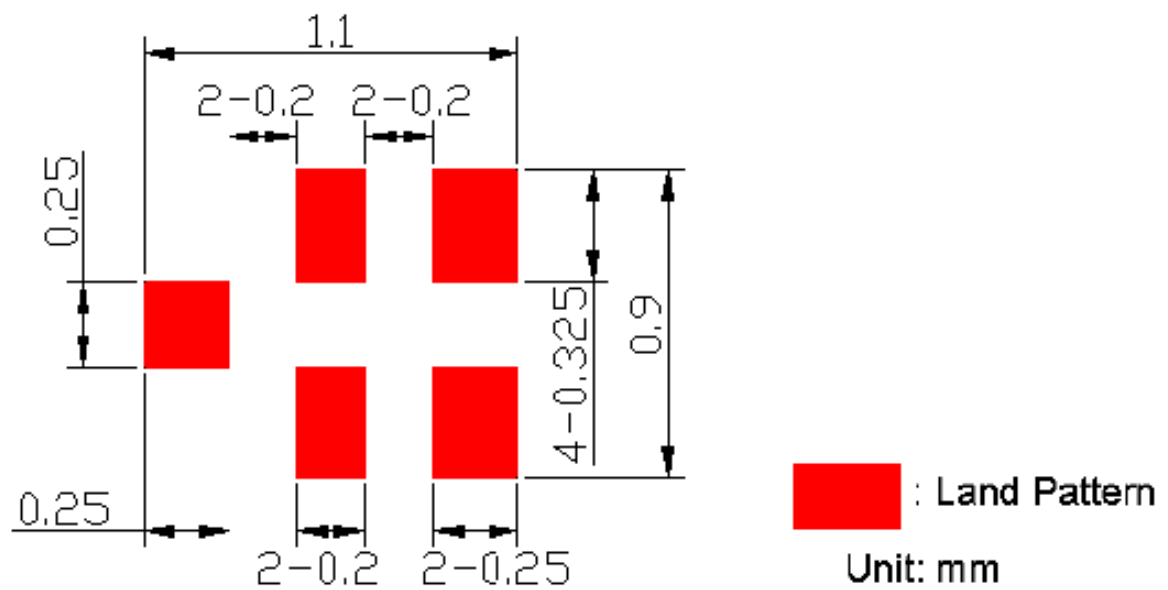


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

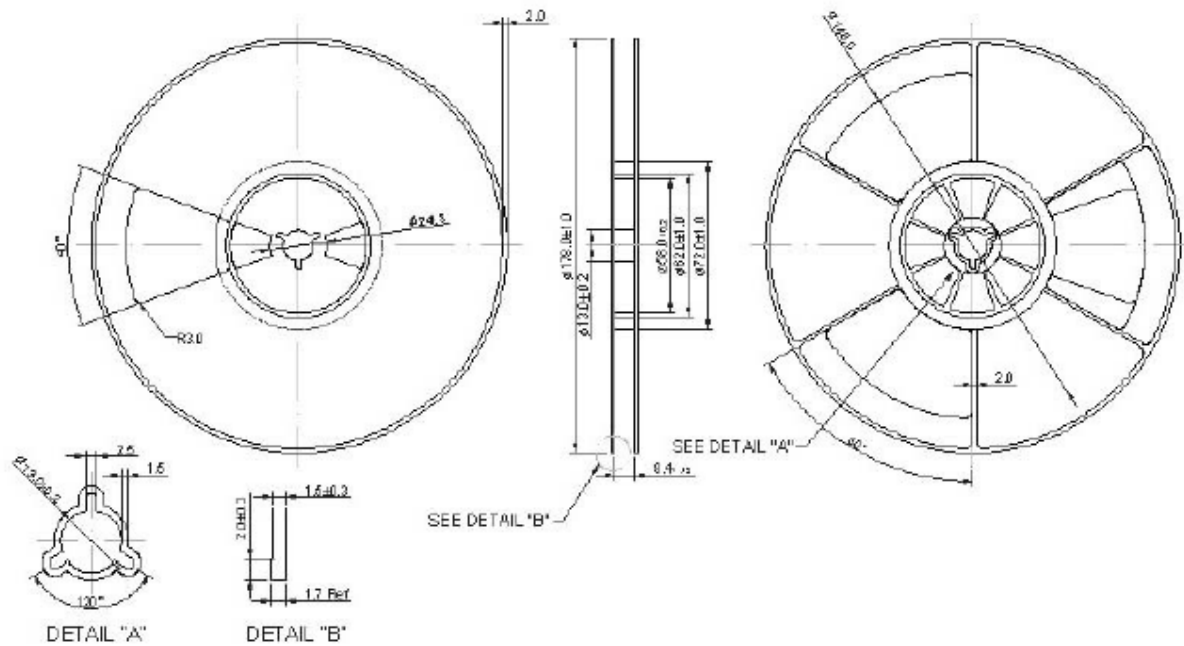

2. TAPE DIMENSION

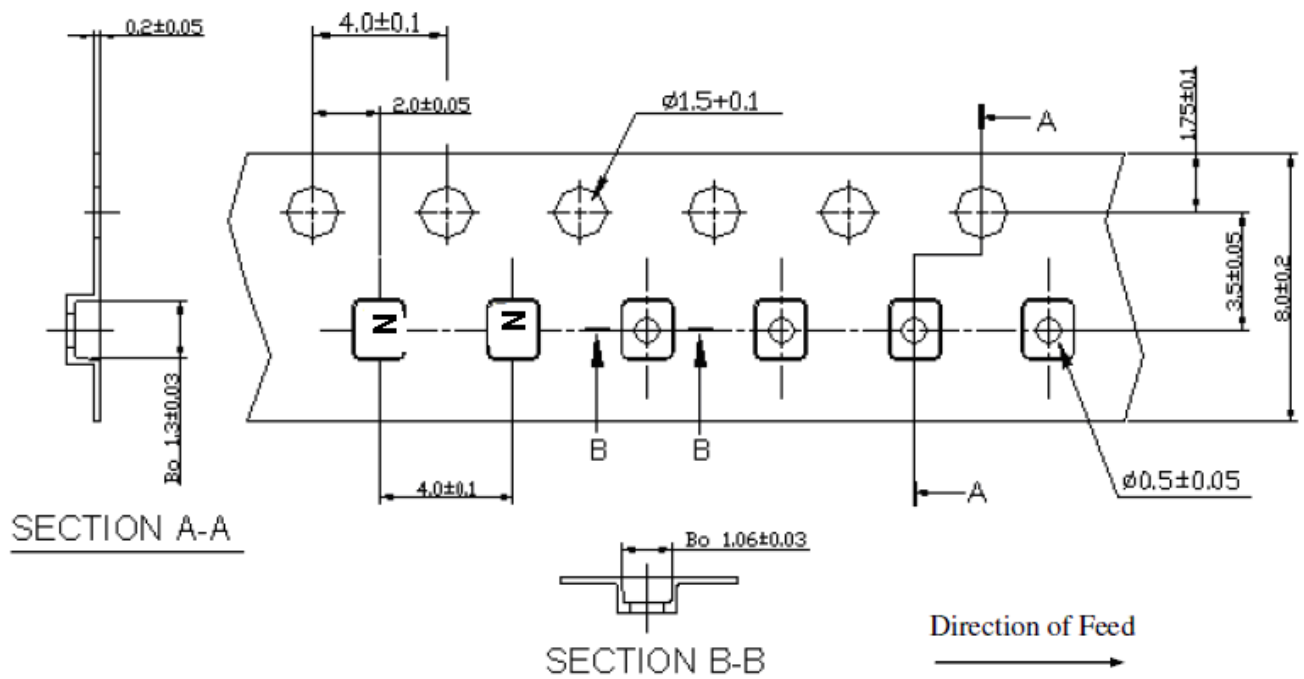

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

