



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specification Approval Sheet

Product Name: SAW Filter 800MHz 20MHz BW SMD 3.0×3.0mm

TST Parts No.:TA0740B

Customer Parts No.:_____

Customer signature required

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Anne Chen

Approved by:_____ Andy Yu

Date:_____ 08, 20, 2019

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 800 MHz

MODEL NO.: TA0740B

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 5 dB_m
2. DC voltage: 5 V
3. Operating Temperature: -40°C to 85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 1 (MSL 1)
6. ESD 100V(MM) 200V(HBM)

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)


B. CHARACTERISTICS:

Item				Min.	Typ.	Max.
Center frequency	F _c	MHz		-	800	-
Insertion loss	790 ~ 810 MHz	IL	dB	-	2.4	3.8
Amplitude ripple	790 ~ 810 MHz		dB	-	0.8	2.0
Attenuation (Reference level from 0dB)						
600 ~ 700		MHz	dB	40	47	-
700 ~ 750		MHz	dB	30	45	-
860 ~ 900		MHz	dB	30	42	-
900 ~ 1000		MHz	dB	38	47	-
Source impedance	Z _S		Ω	-	50	-
Load impedance	Z _L		Ω	-	50	-


Note1. No matching network required for operation at 50Ω

C. MEASUREMENT CIRCUIT:


HP Network analyzer

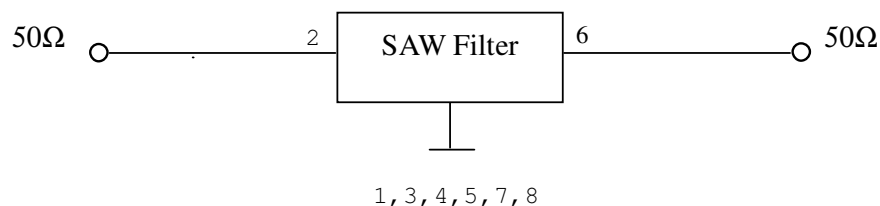


D. Transfer Function :

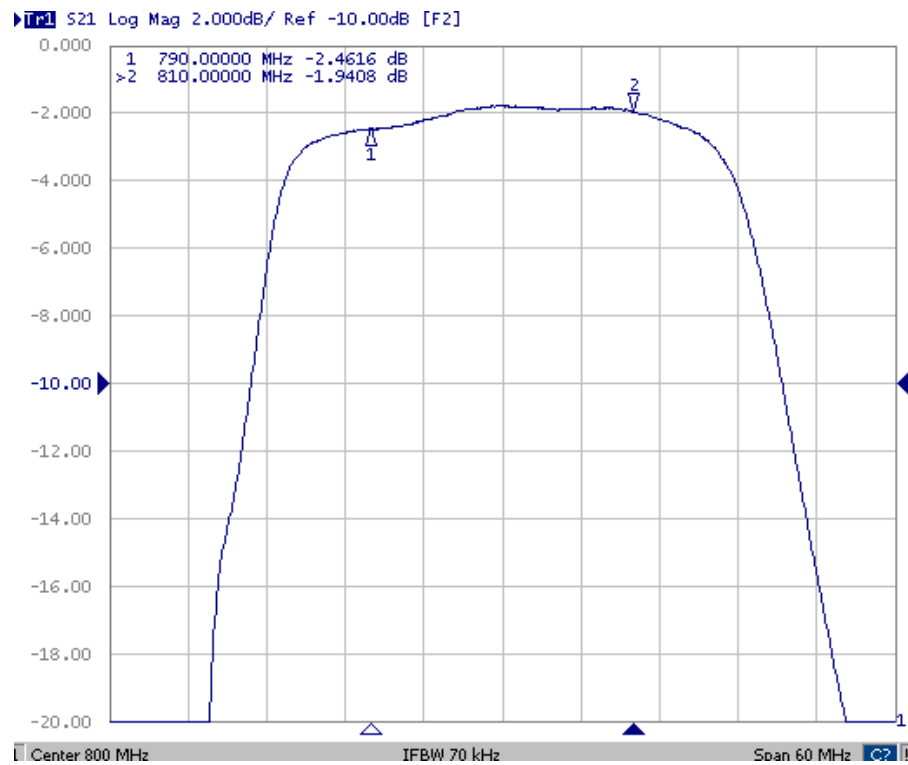

Wideband

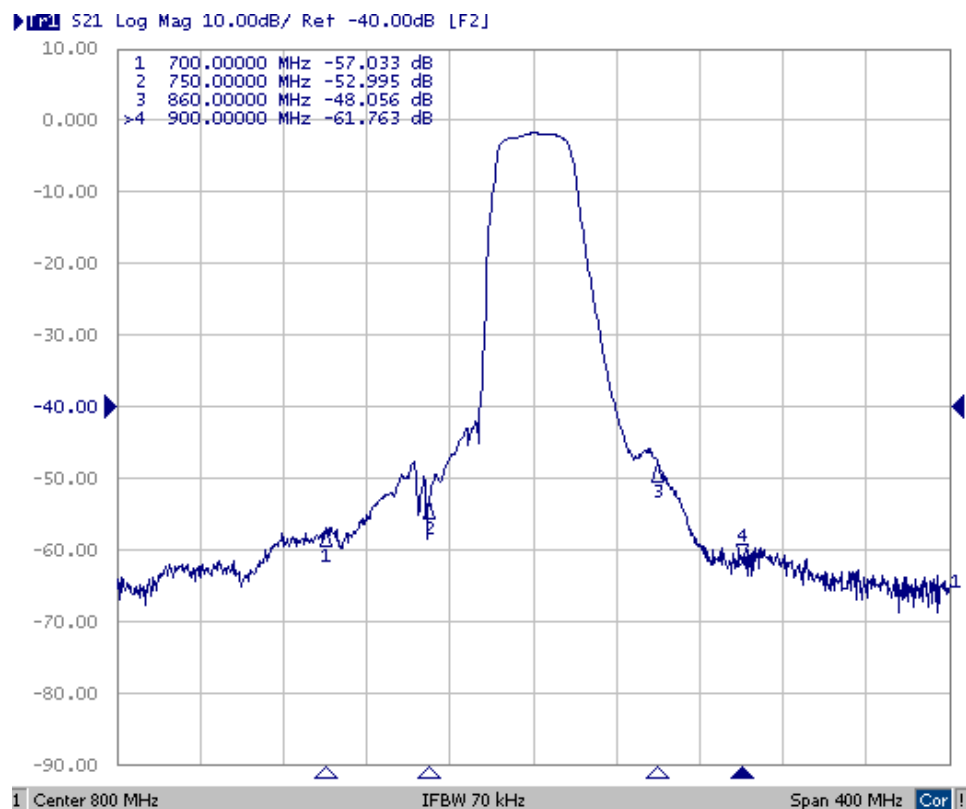

E. OUTLINE DRAWING:

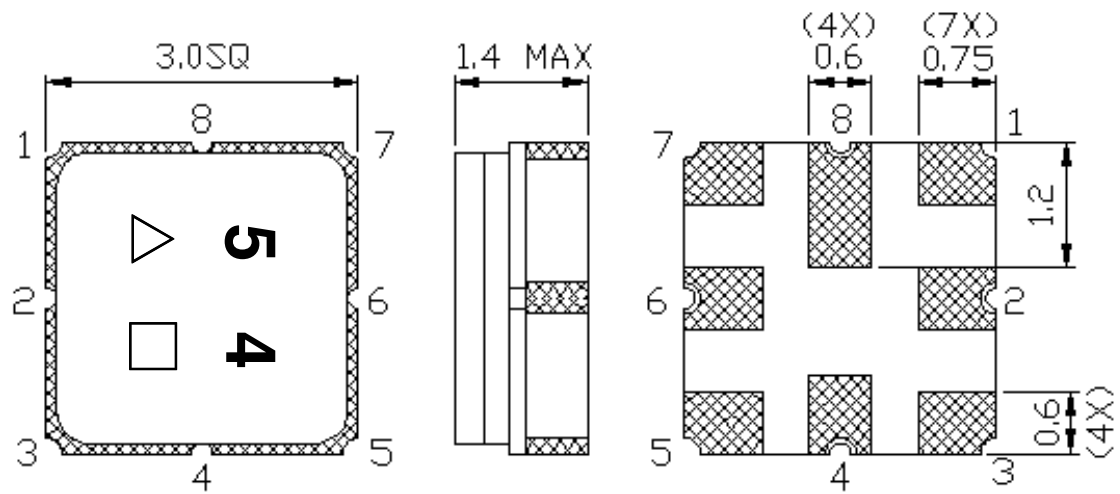

Not Specified Tolerance: $\pm 0.15\text{mm}$

2: Input

6: Output

1,3,4,5,7,8: Ground

Unit: mm


△ : year code(2019→9,2020→0, 2029→9.)

□ : Date Code (Follow the table from planner each year)

Date Code Table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z


F. PCB FOOTPRINT:

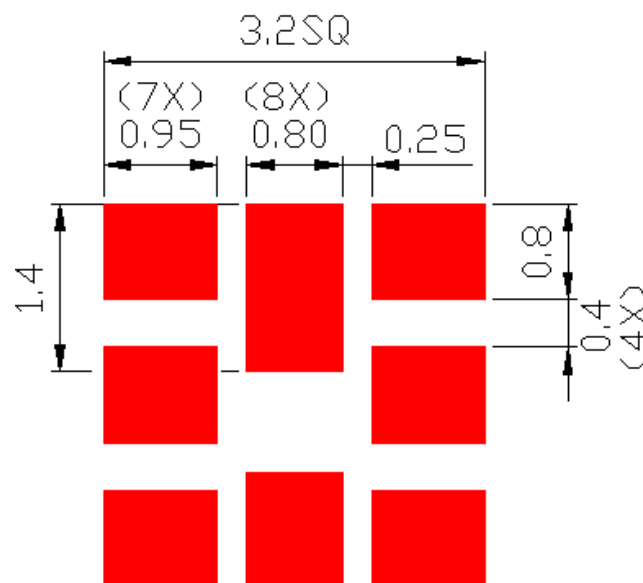


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

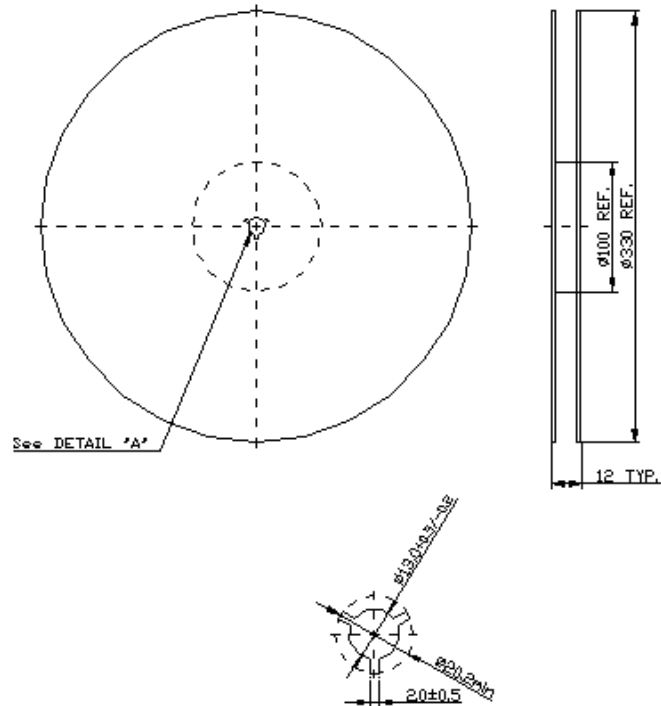

2. TAPE DIMENSION

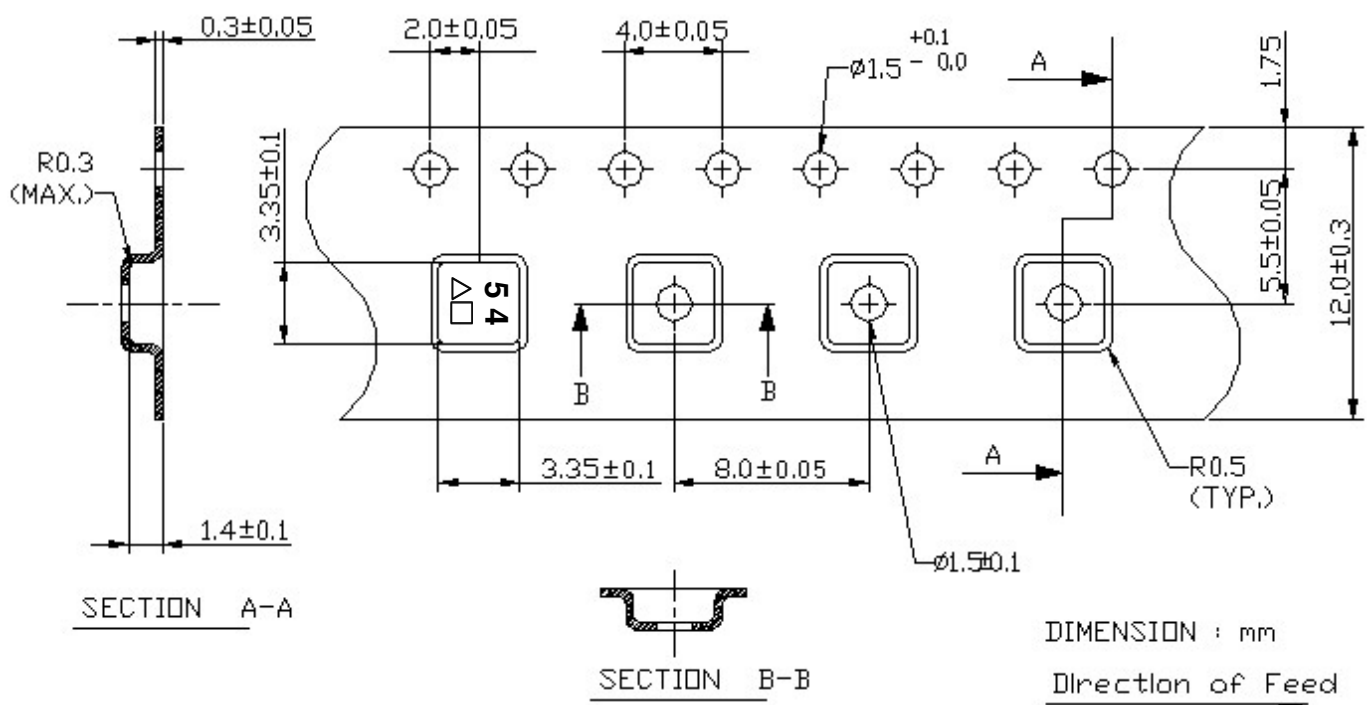

H . RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

