



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1056 MHz SMD 3.0×3.0 mm (BW=30 MHz)

TST Part No.: TA1014B

Customer Part No.: _____

Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ David Chang *David*

Approved by: _____ Andy Yu *Andy Yu*

Date: _____ 2019/04/26

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 1056 MHz

MODEL NO.: TA1014B

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 0 V
3. Operating Temperature: -55°C to +100°C
4. Storage Temperature: -55°C to +105°C
5. Moisture Sensitivity Level: Level 1(**MSL1**)


RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency F_c	MHz	-	1056	-
Insertion Loss (1041~1071 MHz) IL	dB	-	2.6	3.8
Amplitude Ripple (1041~1071 MHz)	dB	-	0.8	2.0
VSWR (1041~1071 MHz)	-	-	1.9	2.4
Attenuation (Reference level from 0 dB)				
F _c -50 MHz	dB	36	42	-
F _c +50 MHz	dB	22	34	-
F _c +90 MHz	dB	38	46	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-

C. MEASUREMENT CIRCUIT:

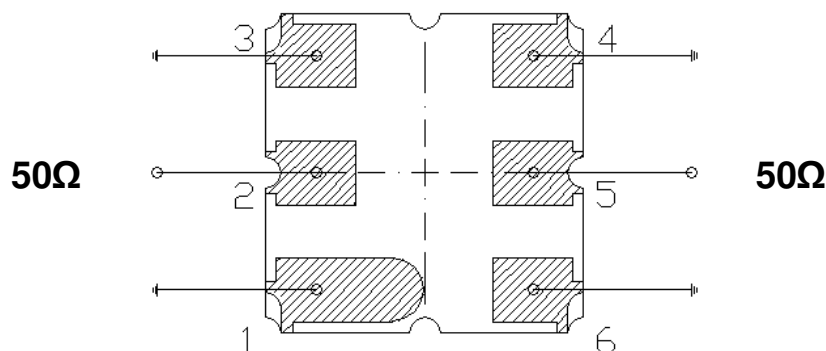


(2): Unbalance Port

(5): Unbalance Port


Others: Ground

D. OUTLINE DRAWING:

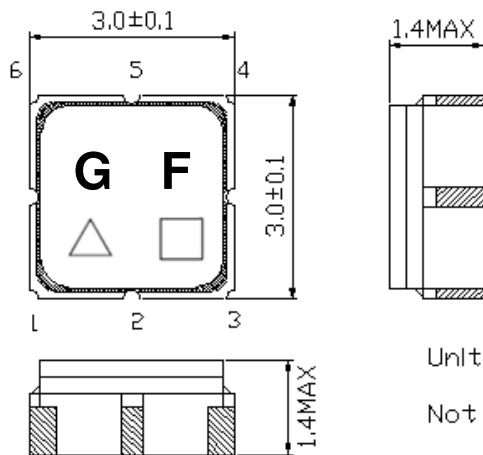

Unit : mm

Not Specified Tolerance : +/-0.15 mm

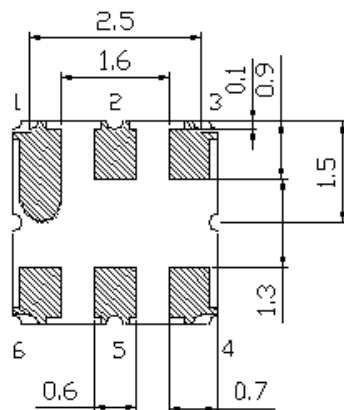

Pin No.	Symbol	Function
1	GND	Ground
2	IN	Input
3	GND	Ground
4	GND	Ground
5	OUT	Output
6	GND	Ground


△ : Year Code (2011->1, 2012->2, ..., 2019->9, 2020->0)

□ : Date Code



Date Code Table:

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

E. PCB Footprint:

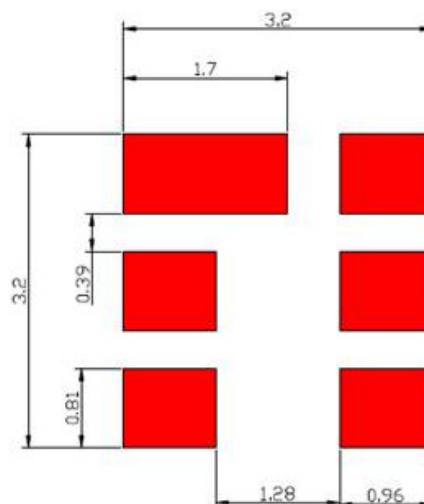

F. Frequency Characteristics:

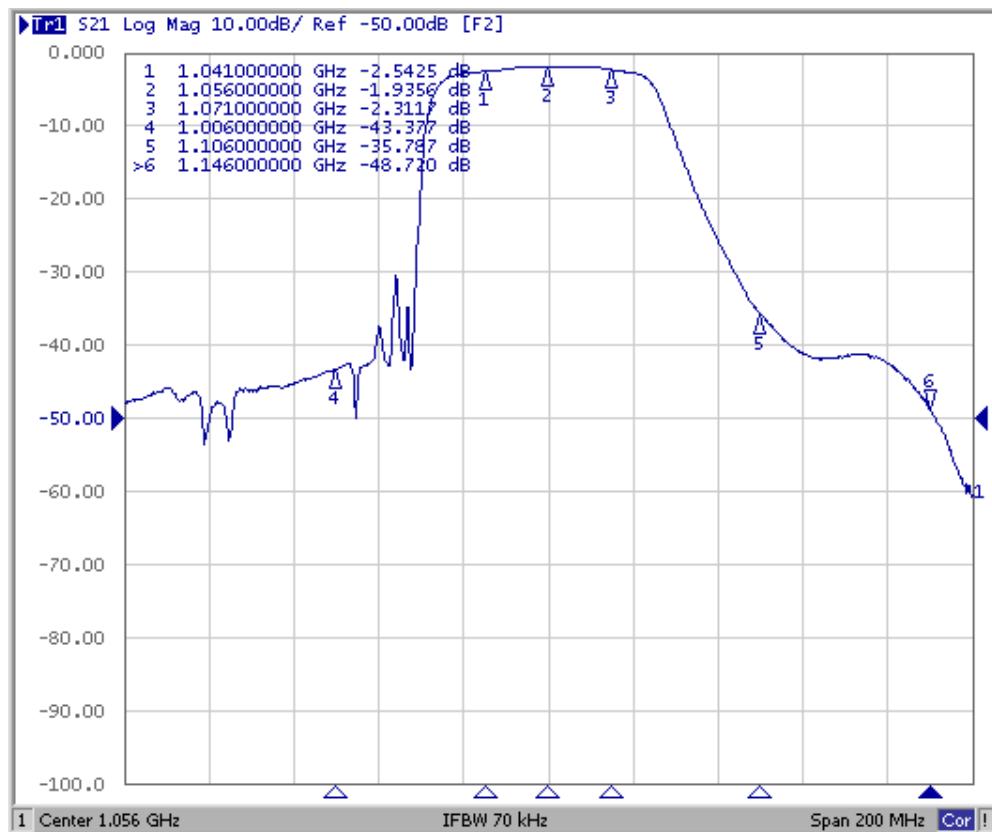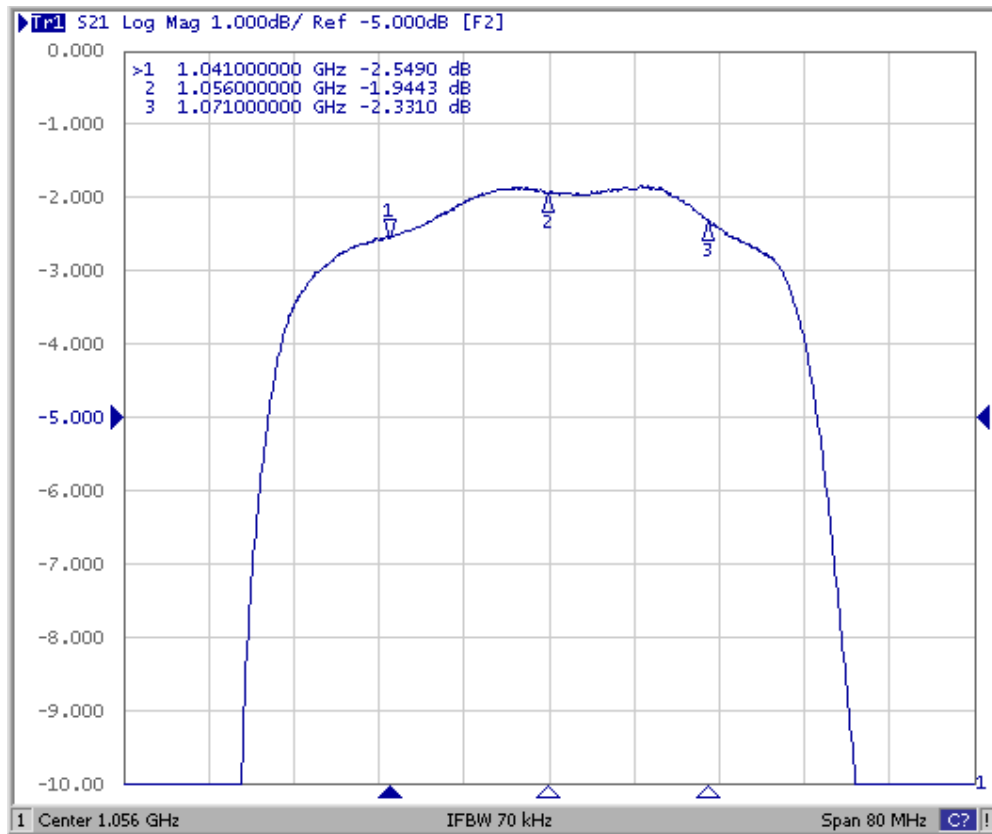

1. REEL DIMENSION

Technical drawing of a multi-hole punch die. The drawing includes a side view and a top view. The side view shows a rectangular block with a width of 12.00 ± 0.3 and a height of 1.40 ± 0.1. The top view shows a rectangular block with a length of 5.50 ± 0.05 and a width of 1.75 ± 0.1. The die has 10 holes, each with a diameter of 1.6 ± 0.1 DIA. The holes are spaced 4.00 ± 0.1 apart. The die is labeled with 'A' and 'B' and 'C'. The 'A' label is located on the right side of the die. The 'B' label is located on the left side of the die. The 'C' label is located on the top surface of the die. The 'Direction of Feed' is indicated by an arrow pointing to the right.

H. Recommended Reflow Profile:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

