

N-Channel Trench MOSFET

Description

The G30N03D3 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.

General Features


- V_{DS} 30V
- I_D (at $V_{GS} = 10V$) 30A
- $R_{DS(ON)}$ (at $V_{GS} = 10V$) $< 7m\Omega$
- $R_{DS(ON)}$ (at $V_{GS} = 4.5V$) $< 12m\Omega$
- 100% Avalanche Tested
- RoHS Compliant

Application


- Power switch
- DC/DC converters



Schematic Diagram



Marking and pin assignment



DFN3X3-8L

Device	Package	Marking	Packaging
G30N03D3	DFN3*3-8L	G30N03	5000pcs/Reel

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Continuous Drain Current	I_D	30	A
Pulsed Drain Current (note1)	I_{DM}	120	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	P_D	24	W
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 To 150	$^\circ\text{C}$

Thermal Resistance



Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	R_{thJA}	24	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	R_{thJC}	5.2	$^\circ\text{C/W}$

Specifications T _J = 25°C, unless otherwise noted						
Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	30	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0V, T _J = 25°C	--	--	1	μA
Gate-Source Leakage	I _{GSS}	V _{GS} = ±20V	--	--	±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1	1.5	2.5	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 10V, I _D = 20A	--	6.5	7	mΩ
		V _{GS} = 5V, I _D = 15A	--	8	12	
Forward Transconductance	g _{FS}	V _{DS} =5V,I _D =20A	--	40	--	S
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 15V, f = 1.0MHz	--	825	--	pF
Output Capacitance	C _{oss}		--	335	--	
Reverse Transfer Capacitance	C _{rss}		--	40	--	
Total Gate Charge	Q _g	V _{DD} = 15V, I _D = 20A, V _{GS} = 10V	--	13	--	nC
Gate-Source Charge	Q _{gs}		--	2.2	--	
Gate-Drain Charge	Q _{gd}		--	2.6	--	
Turn-on Delay Time	t _{d(on)}	V _{DD} = 15V, I _D = 20A, R _G = 3Ω	--	5	--	ns
Turn-on Rise Time	t _r		--	3	--	
Turn-off Delay Time	t _{d(off)}		--	20	--	
Turn-off Fall Time	t _f		--	3	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I _S	T _C = 25°C	--	--	30	A
Pulsed Diode Forward Current	I _{SM}		--	--	120	
Body Diode Voltage	V _{SD}	T _J = 25°C, I _{SD} = 20A, V _{GS} = 0V	--	--	1.2	V



Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. Identical low side and high side switch with identical R_G



Gate Charge Test Circuit

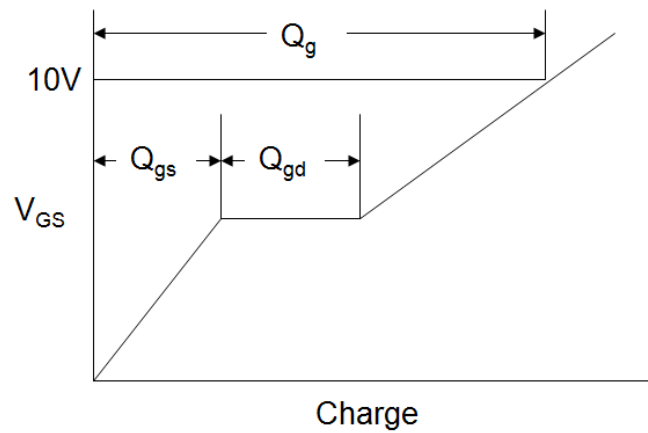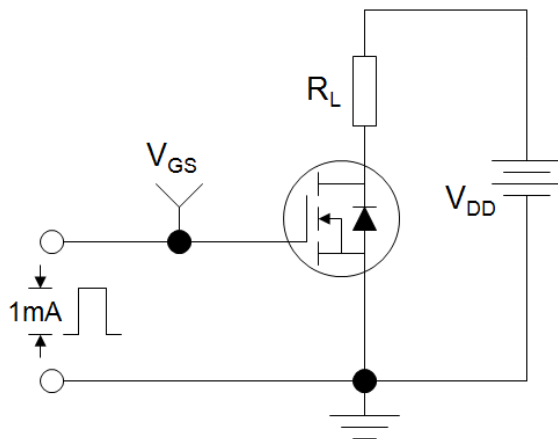

EAS Test Circuit

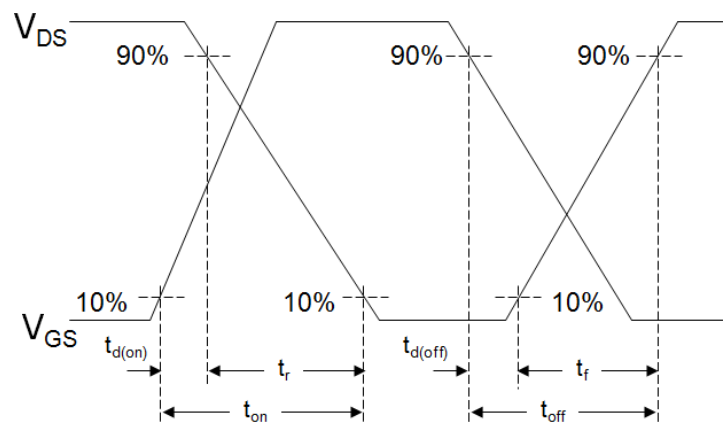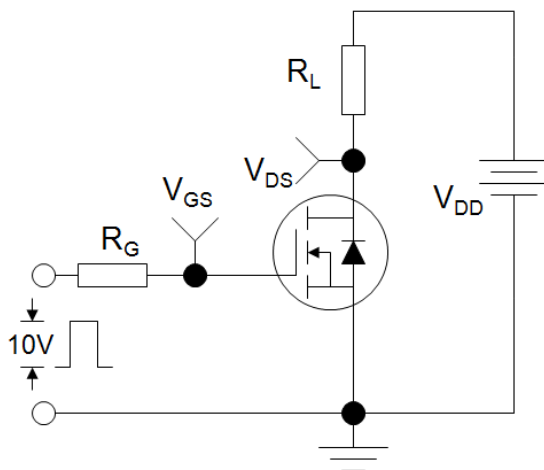

Switch Time Test Circuit

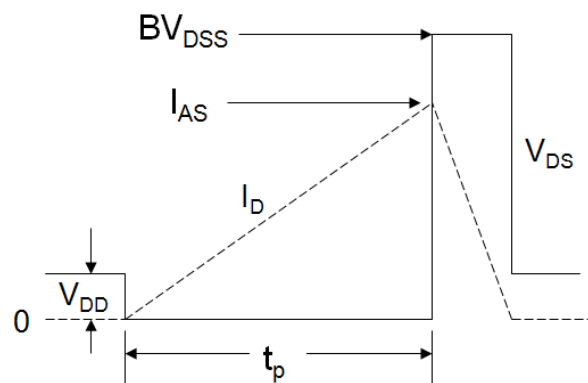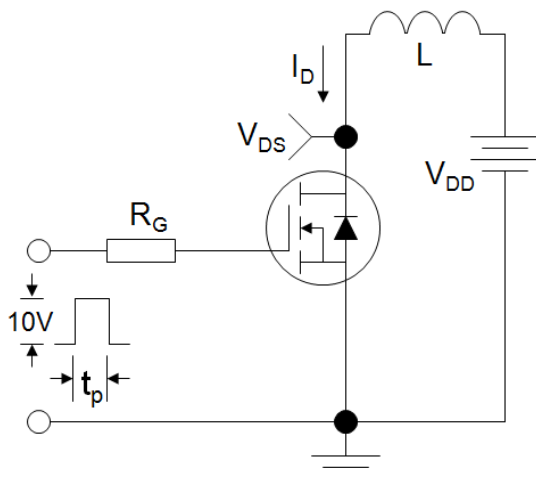

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 1. Output Characteristics

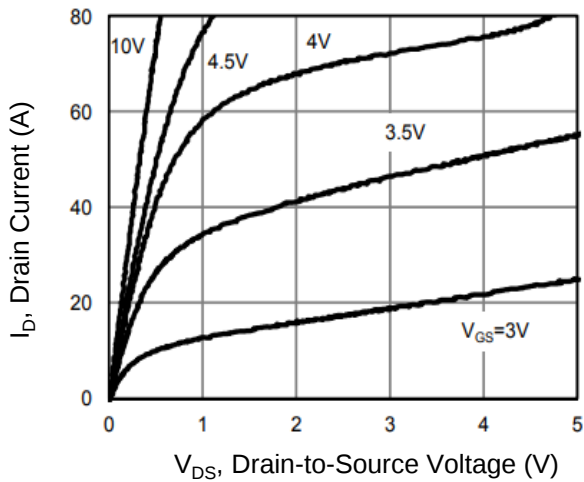


Figure 2. Transfer Characteristics

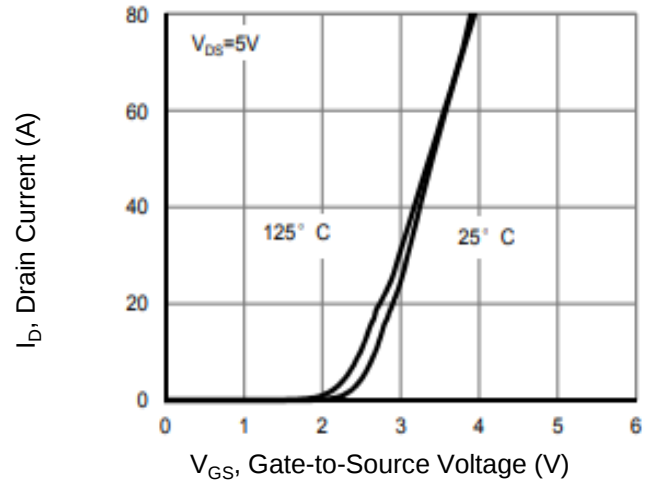


Figure 3. $R_{DS(on)}$ -Drain Current

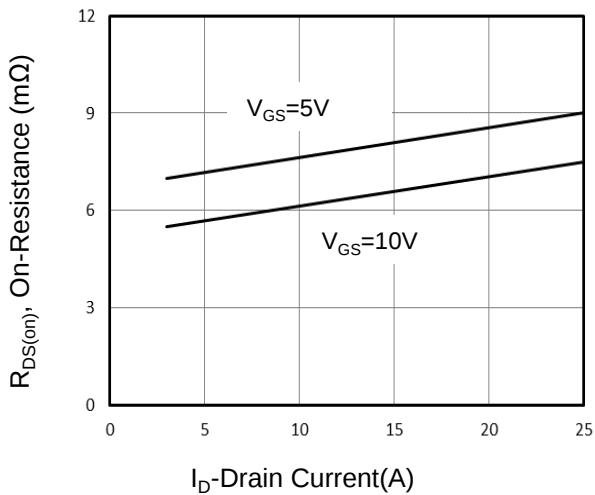


Figure 4. Gate Charge

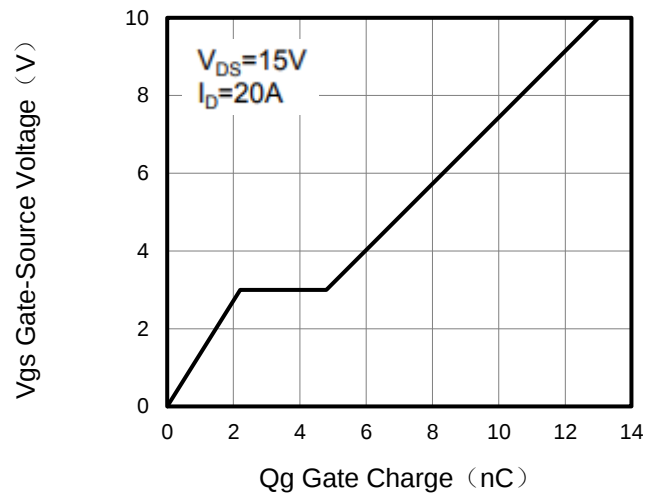


Figure 5. Capacitance vs Vds


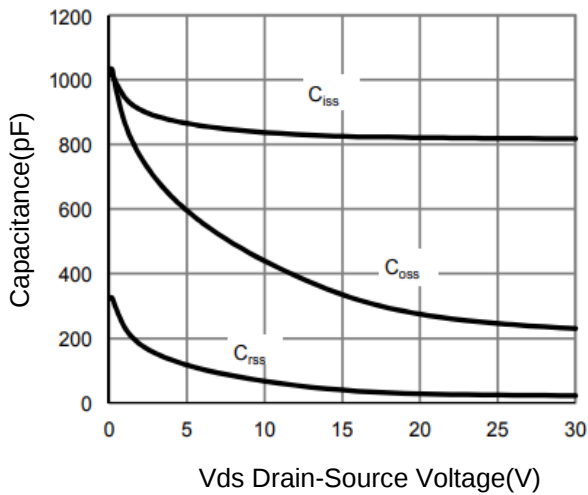


Figure 6. Source-Drain Diode Forward

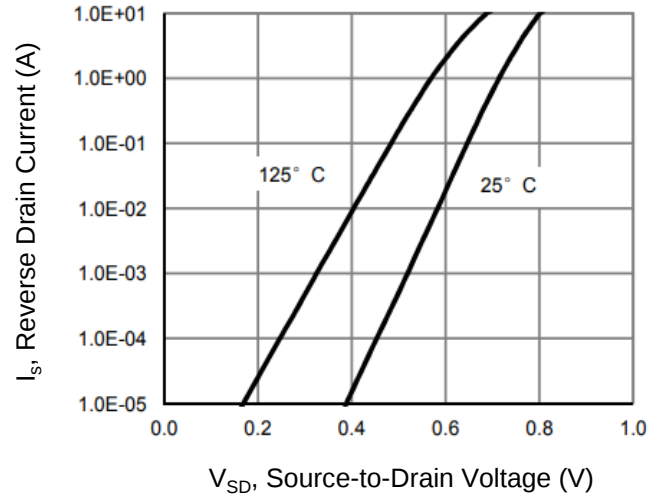

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 7. Drain-Source On-Resistance

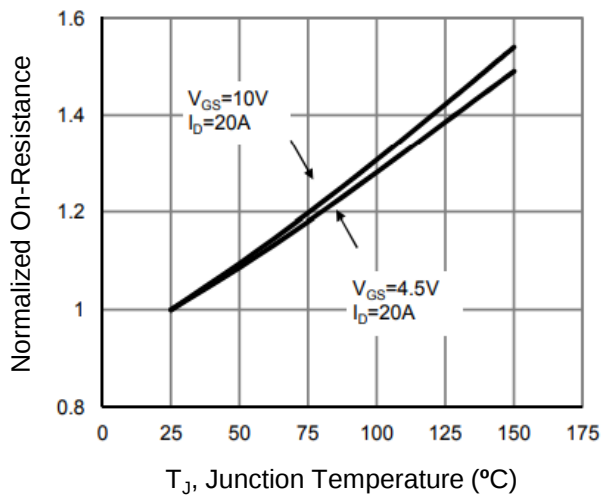


Figure 8. Safe Operation Area



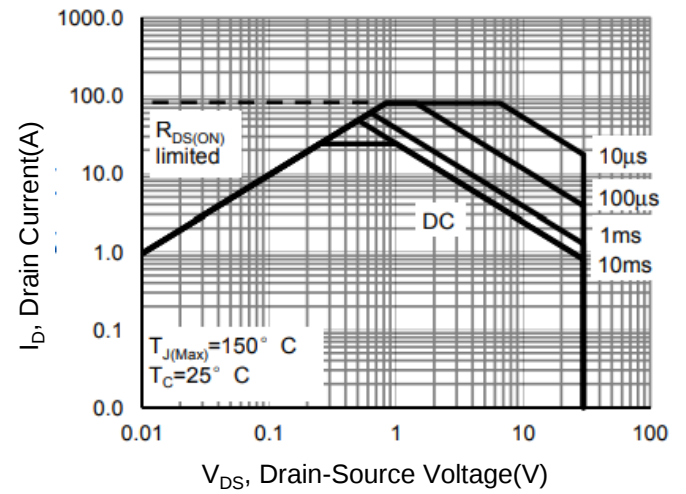


Figure 9. Normalized Maximum Transient Thermal Impedance

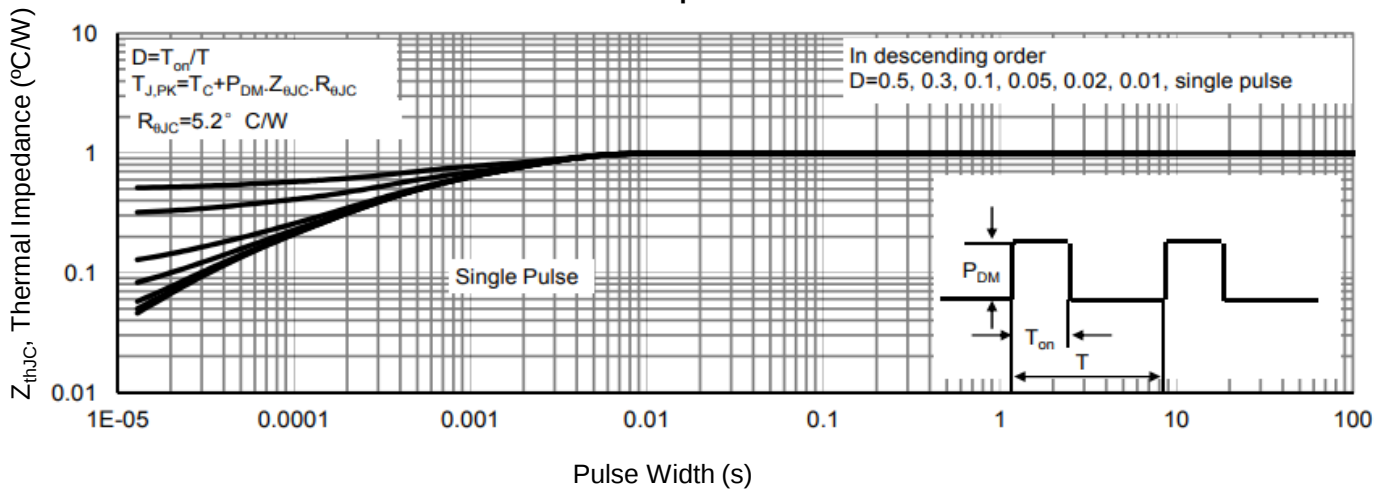

DFN3X3-8L Package information

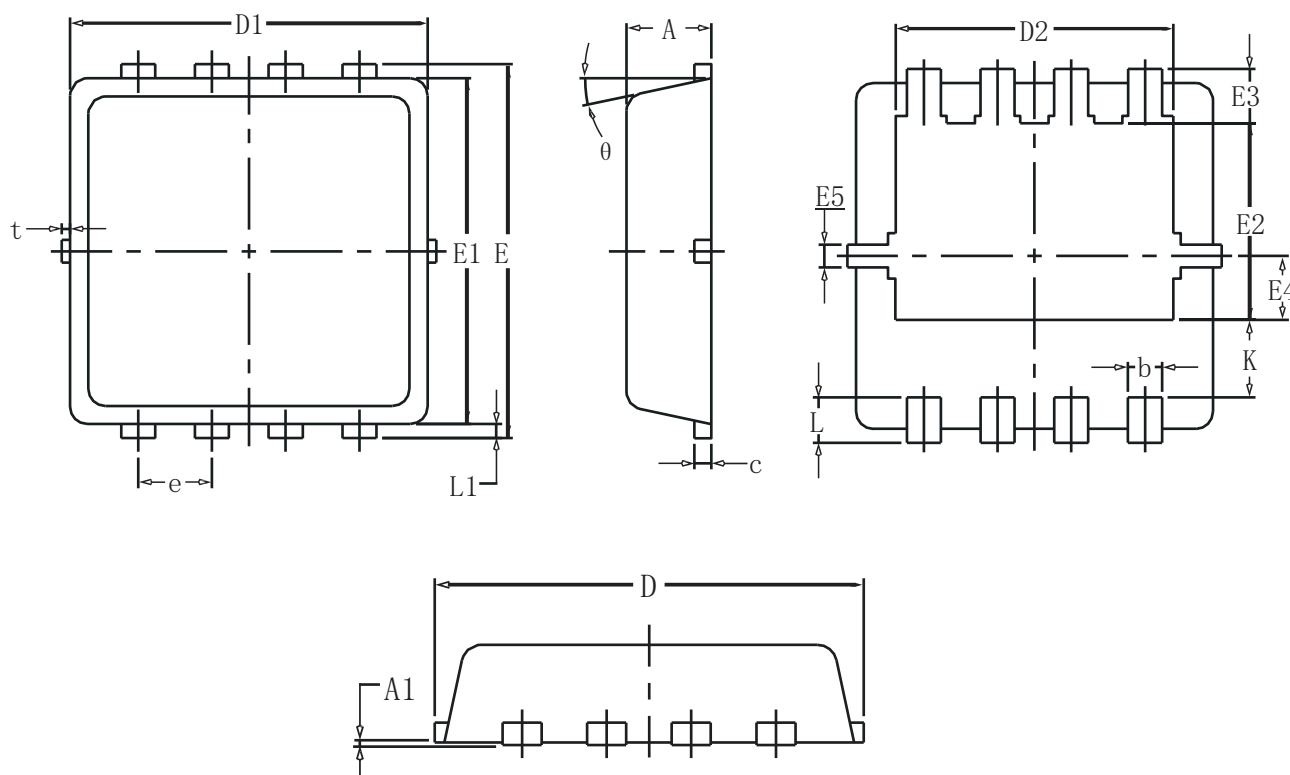

SYMBOL	COMMON		
	MM		
	MIN	NOM	MAX
A	0.70	0.75	0.85
A1	—	—	0.05
b	0.20	0.30	0.40
c	0.10	0.152	0.25
D	3.15	3.30	3.45
D1	3.00	3.15	3.25
D2	2.29	2.45	2.65
E	3.15	3.30	3.45
E1	2.90	3.05	3.20
E2	1.54	1.74	1.94
E3	0.28	0.48	0.65
E4	0.37	0.57	0.77
E5	0.10	0.20	0.30
e	0.60	0.65	0.70
K	0.59	0.69	0.89
L	0.30	0.40	0.50
L1	0.06	0.125	0.20
t	0	0.075	0.13
θ	10°	12°	14°