




N-Channel Enhancement Mode Power MOSFET

Description The G08N02L uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.		 Schematic Diagram	
General Features • V_{DS} 20V • I_D (at $V_{GS} = 10V$) 8A • $R_{DS(ON)}$ (at $V_{GS} = 4.5V$) < 12.3mΩ • $R_{DS(ON)}$ (at $V_{GS} = 2.5V$) < 13.7mΩ • 100% Avalanche Tested • RoHS Compliant		 Marking and pin assignment	
Application • Power switch • DC/DC converters		 SOT-23-3L	
Device	Package	Marking	Packaging
G08N02L	SOT-23-3L	G08N02	3000pcs/Reel

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Continuous Drain Current	I_D	8	A
Pulsed Drain Current (note1)	I_{DM}	32	A
Gate-Source Voltage	V_{GS}	± 12	V
Power Dissipation	P_D	1.5	W
Single pulse avalanche energy (note3)	E_{AS}	64	mJ
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 To 150	$^\circ\text{C}$

Thermal Resistance



Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	R_{thJC}	83	$^\circ\text{C/W}$

Specifications T _J = 25°C, unless otherwise noted						
Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	20	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 20V, V _{GS} = 0V	--	--	1	μA
Gate-Source Leakage	I _{GSS}	V _{GS} = ±12V	--	--	±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	0.5	0.64	0.9	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 4.5V, I _D = 12A	--	10	12.3	mΩ
		V _{GS} = 2.5V, I _D = 12A	--	11	13.7	
Forward Transconductance	g _{FS}	V _{DS} =10V,I _D =4A	--	38	--	S
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 10V, f = 1.0MHz	--	929	--	pF
Output Capacitance	C _{oss}		--	163	--	
Reverse Transfer Capacitance	C _{rss}		--	124	--	
Total Gate Charge	Q _g	V _{DS} = 10V, I _D = 8A, V _{GS} = 10V	--	22	--	nC
Gate-Source Charge	Q _{gs}		--	3.8	--	
Gate-Drain Charge	Q _{gd}		--	4.6	--	
Turn-on Delay Time	t _{d(on)}	V _{DD} = 10V, I _D = 5A, R _G = 50Ω	--	320	--	ns
Turn-on Rise Time	t _r		--	1100	--	
Turn-off Delay Time	t _{d(off)}		--	4050	--	
Turn-off Fall Time	t _f		--	2600	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I _S	T _C = 25°C	--	--	8	A
Body Diode Voltage	V _{SD}	T _J = 25°C, I _{SD} = 1A, V _{GS} = 0V	--	--	1.2	V



Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. Identical low side and high side switch with identical R_G
3. EAS condition : $T_J=25^{\circ}\text{C}$, $V_{DD}=20V, V_G=10V, L=0.5mH, R_g=25\Omega$



Gate Charge Test Circuit

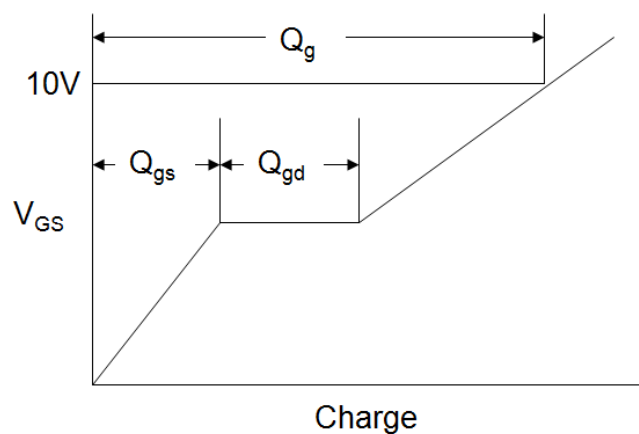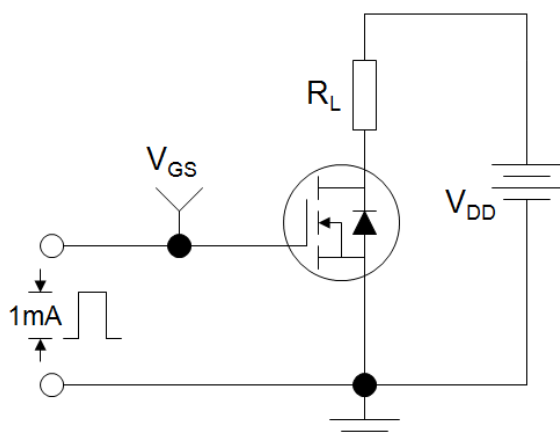

EAS Test Circuit

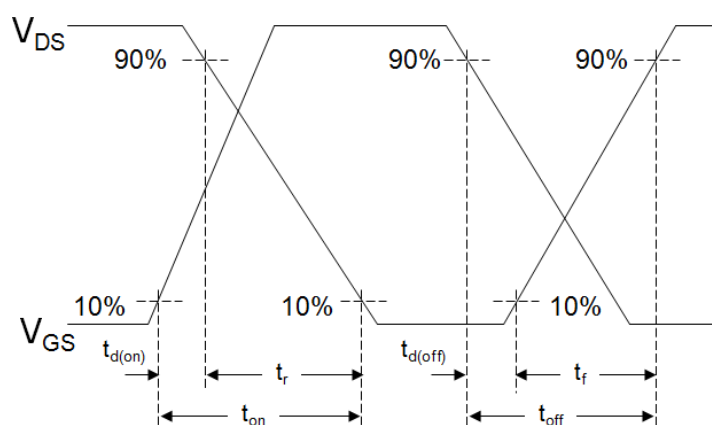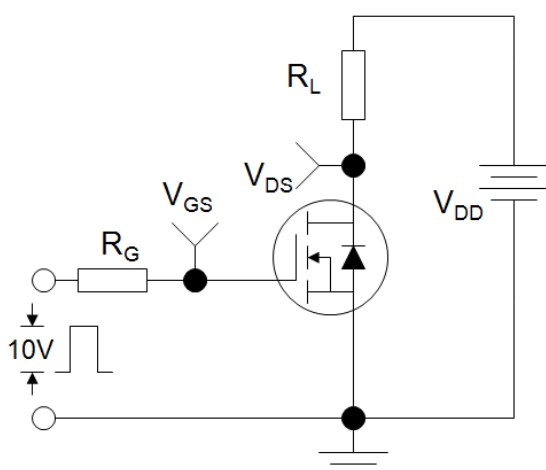

Switch Time Test Circuit

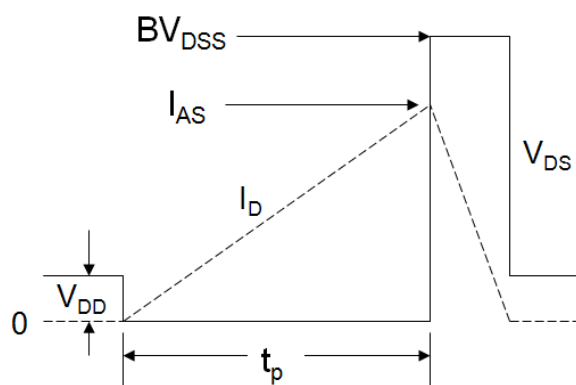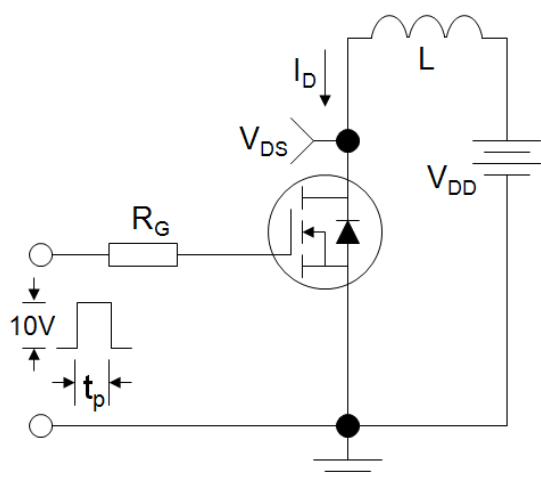

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 1. Output Characteristics

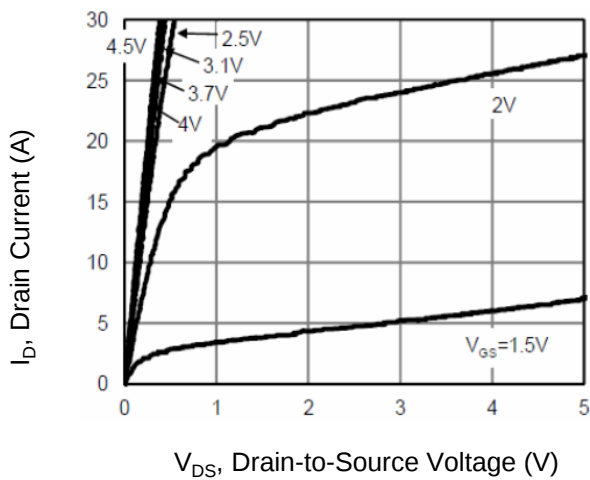


Figure 2. Transfer Characteristics

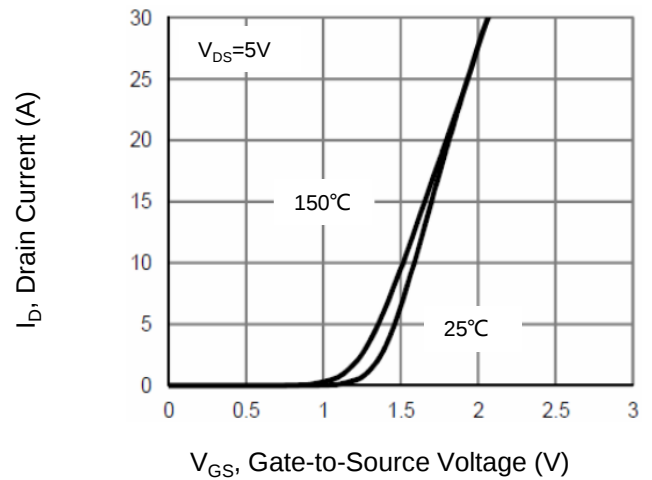


Figure 3. Gate Charge

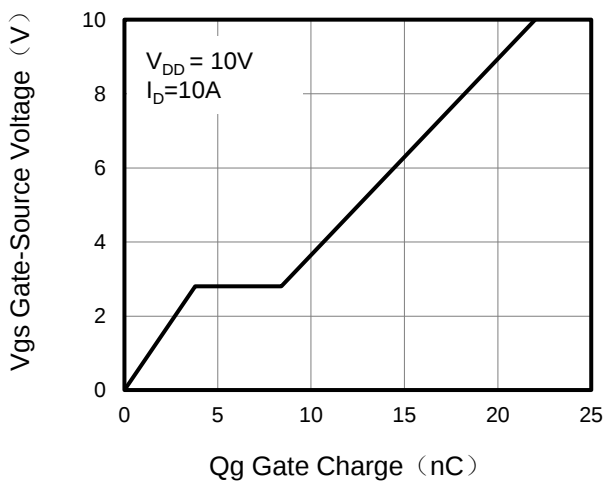


Figure 4. Drain Source On Resistance

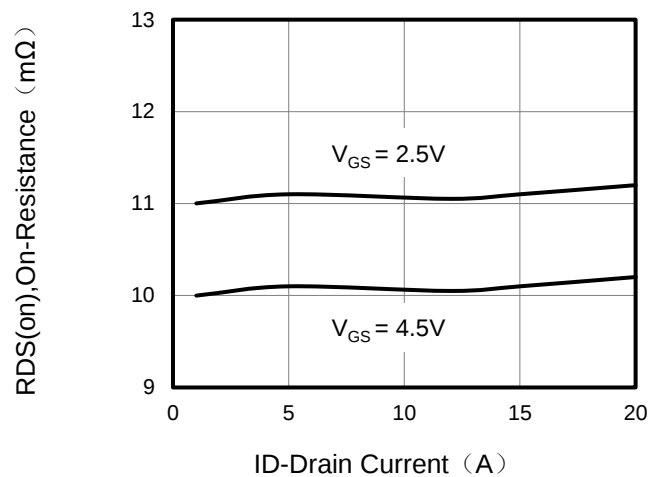


Figure 5. Capacitance vs Vds


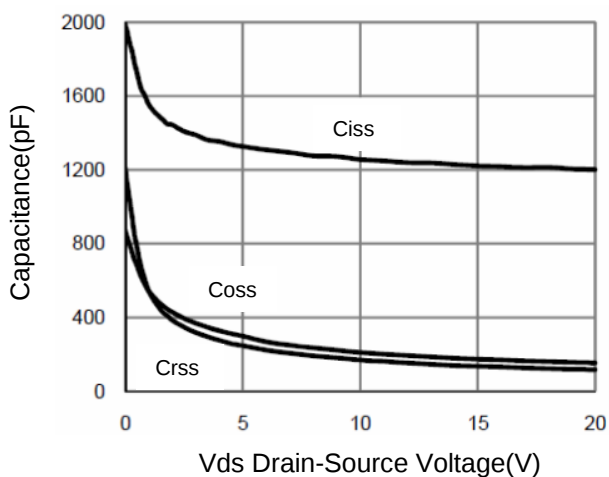


Figure 6. Source-Drain Diode Forward

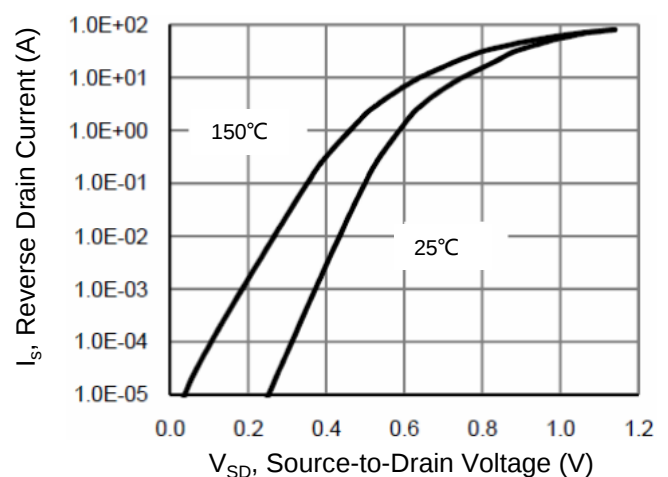

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 7. Drain-Source On-Resistance

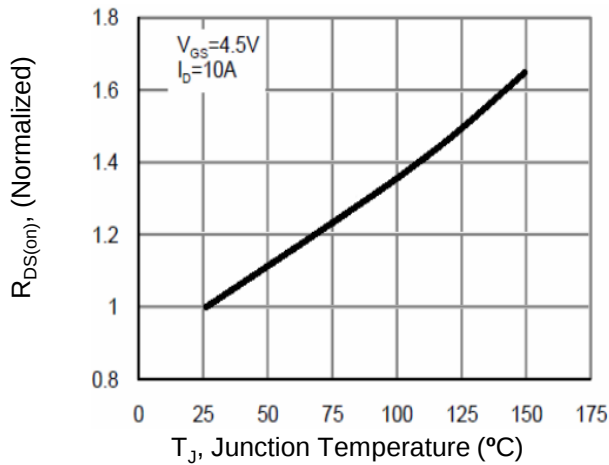


Figure 8. Safe Operation Area



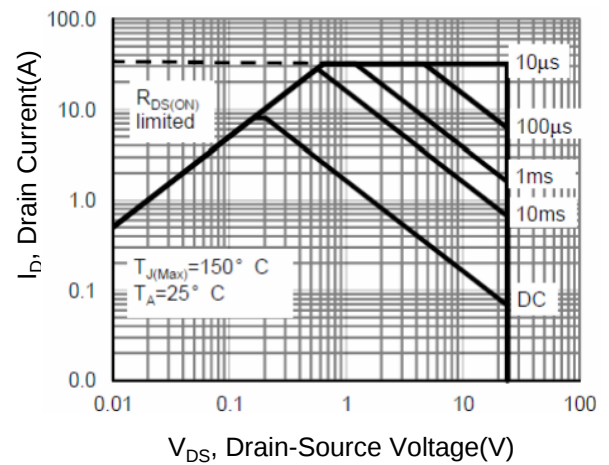


Figure 9. Normalized Maximum Transient Thermal Impedance

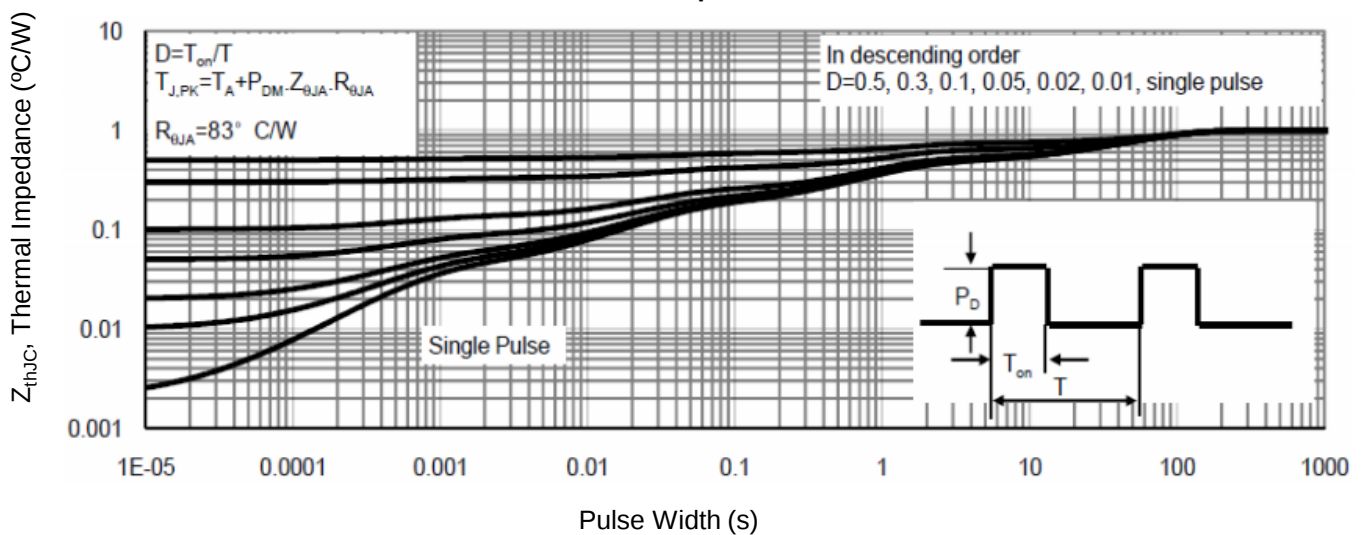

SOT-23-3L Package Information

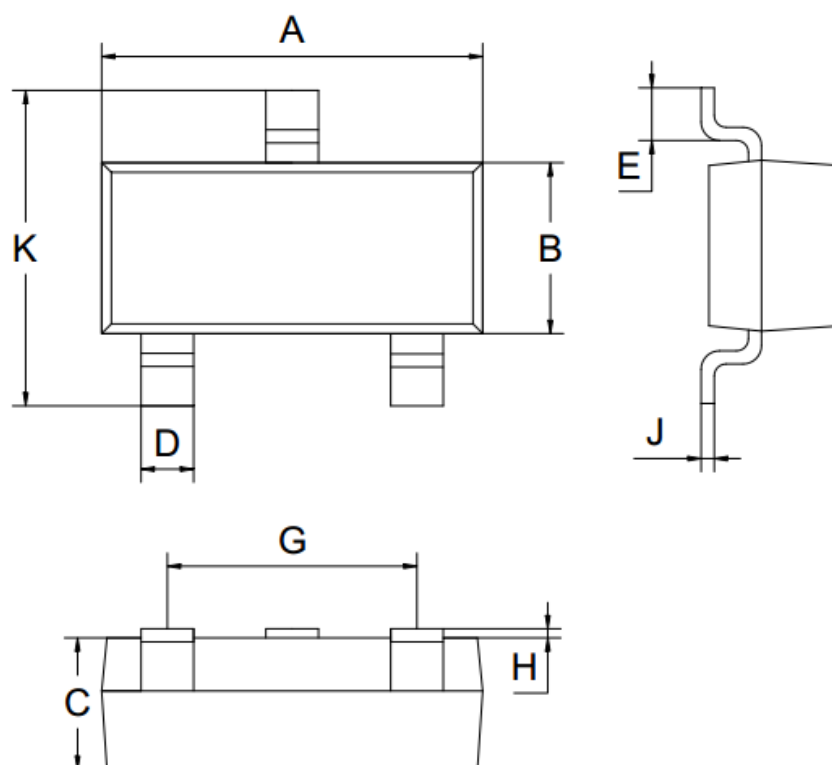

Symbol	Dimensions in Millimeters		
	MIN.	NOM.	MAX.
A	2.80	2.90	3.00
B	1.50	1.60	1.70
C	1.00	1.10	1.20
D	0.30	0.40	0.50
E	0.25	0.40	0.55
G	1.90		
H	0.00	-	0.10
J	0.047	0.127	0.207
K	2.60	2.80	3.00
All Dimensions in mm			