



UF601

Power MOSFET



**0.185A, 600V N-CHANNEL
DEPLETION-MODE POWER
MOSFET****DESCRIPTION**

The UTC **UF601** is an N-channel power MOSFET using UTC's advanced technology to provide the customers with high switching speed.

FEATURES

* $R_{DS(ON)} \leq 120\Omega$ @ $V_{GS}=0V$, $I_D=3.0mA$

* High Switching Speed

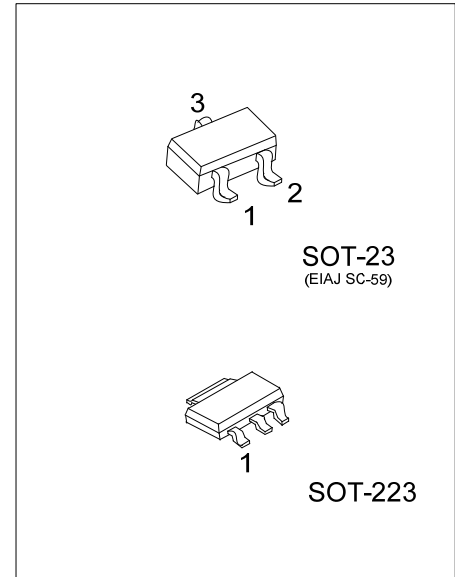SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UF601L-AA3-R	UF601G-AA3-R	SOT-223	G	D	S	Tape Reel
UF601L-AE3-R	UF601G-AE3-R	SOT-23	G	S	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UF601G-AA3-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) AA3: SOT-223, AE3: SOT-23 (3) G: Halogen Free and Lead Free, L: Lead Free
--	---

MARKING

SOT-223	SOT-23
F601 L: Lead Free G: Halogen Free Date Code	F601 L: Lead Free G: Halogen Free

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage (Note 2)		V _{DSS}	600	V
Drain-Gate Voltage (Note 2)		V _{DGX}	600	V
Gate-Source Voltage		V _{GSS}	±20	V
Drain Current	Continuous	I _D	0.185	A
	Pulsed	I _{DM}	0.740	A
Power Dissipation	SOT-223	P _D	0.8	W
	SOT-23		0.5	W
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. T_J=+25°C~+150°C

■ THERMAL CHARACTERISTICS

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ _{JA}	150	°C/W
	SOT-23		250	°C/W



■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =-5V	600			V
Drain-Source Leakage Current		I _{D(OFF)}	V _{DS} =600V, V _{GS} =-5V			0.1	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate to Source Cut Off Voltage		V _{GS(OFF)}	V _{DS} =3V, I _D =8μA	-1.0		-3.0	V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =25V, V _{GS} =0V	7.0			mA
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =0V, I _D =3.0mA		60	120	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz		53		pF
Output Capacitance		C _{OSS}			3000		pF
Reverse Transfer Capacitance		C _{RSS}			2.6		pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{GS} =-5~5V, V _{DS} =30V, I _D =5mA		7.6		nC
Gate to Source Charge		Q _{GS}			4		nC
Gate to Drain Charge		Q _{GD}			0.4		nC
Turn-ON Delay Time		t _{D(ON)}	V _{GS} =-5~5V, V _{DD} =30V, I _D =5mA, R _G =20Ω		42		ns
Rise Time		t _R			20		ns
Turn-OFF Delay Time		t _{D(OFF)}			80		ns
Fall-Time		t _F			300		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Drain-Source Diode Forward Voltage		V _{SD}	I _{SD} =3.0mA, V _{GS} =-10V			1.4	V

Note: 1. Repetitive rating, pulse width limited by maximum junction temperature

2. Pulse width≤380μs; duty cycle≤2%

■ TYPICAL CHARACTERISTICS

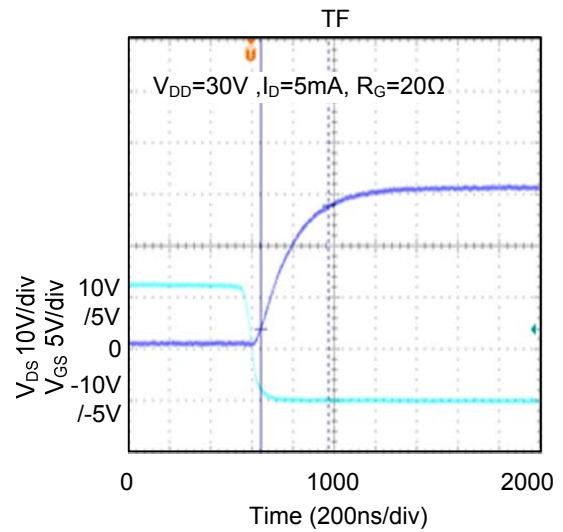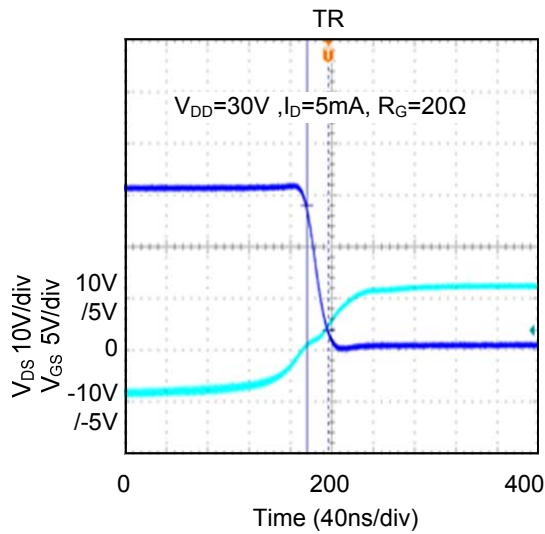

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.