



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: Jun, 27, 2007

Product Name: SAW Filter 895.5 MHz SMD 3.0X3.0 mm

TST Parts No.: TA0627A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 6, 27, 2007



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 895.5MHz

MODEL NO.:TA0627A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -30°C to +80°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	895.5	-	-
Max Insertion Loss ae	dB	-	1.4	2.7	-
Max Insertion Loss at ambient temp.	dB	-	1	2.2	-
Amplitude Ripple (876 ~ 915 MHz)	dB	-	1.8	2.4	-
Amplitude Ripple at ambient temp. (876 ~ 915 MHz)	dB	-	1.5	2.2	-
VSWR (876 ~ 915 MHz)		-	2.3	3	-
Relative Attenuation (relative to 0 dB)					
D.C. ~ 856 MHz	dB	17	19	-	-
925 ~ 935 MHz	dB	4	9	-	-
925 ~ 935 MHz at ambient temp.	dB	6	15	-	-
935 ~ 2000 MHz	dB	20	22	-	-
2000 ~ 3000 MHz	dB	13	17	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

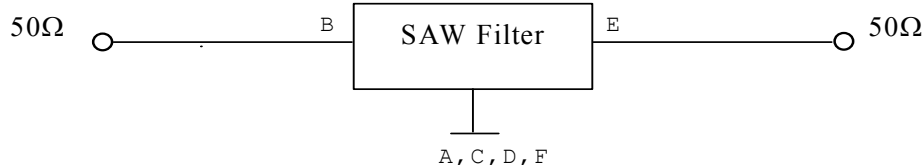


D.OUTLINE DRAWING:

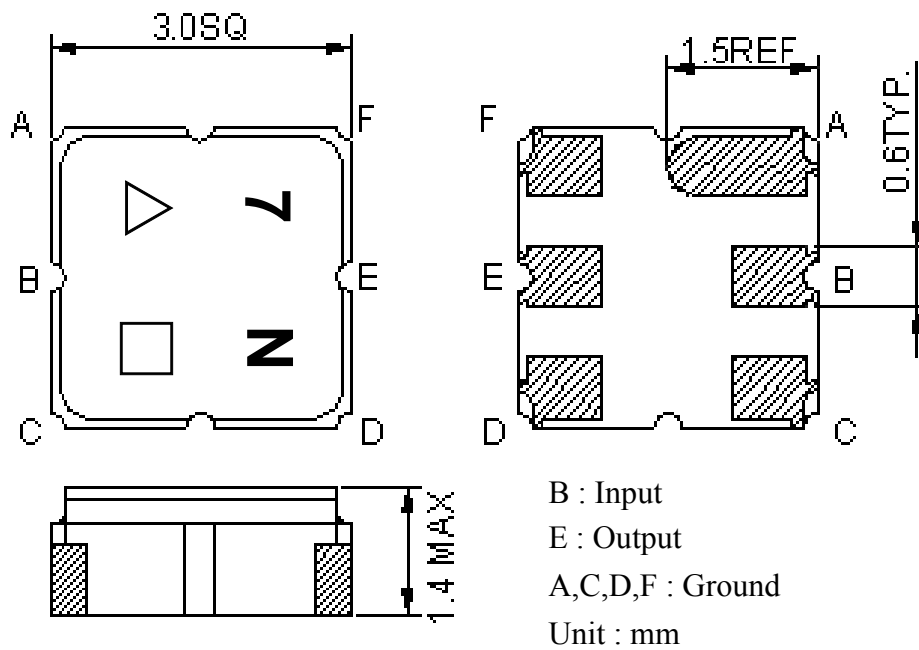



△ : Year Code (2006->6, ..., 2009->9)

□ : Date Code (Follow the table from planner each year)

E. PCB Footprint:

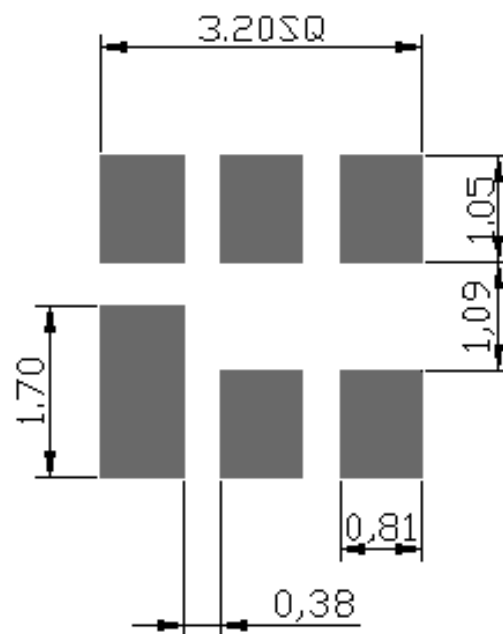


F. Frequency Characteristics :

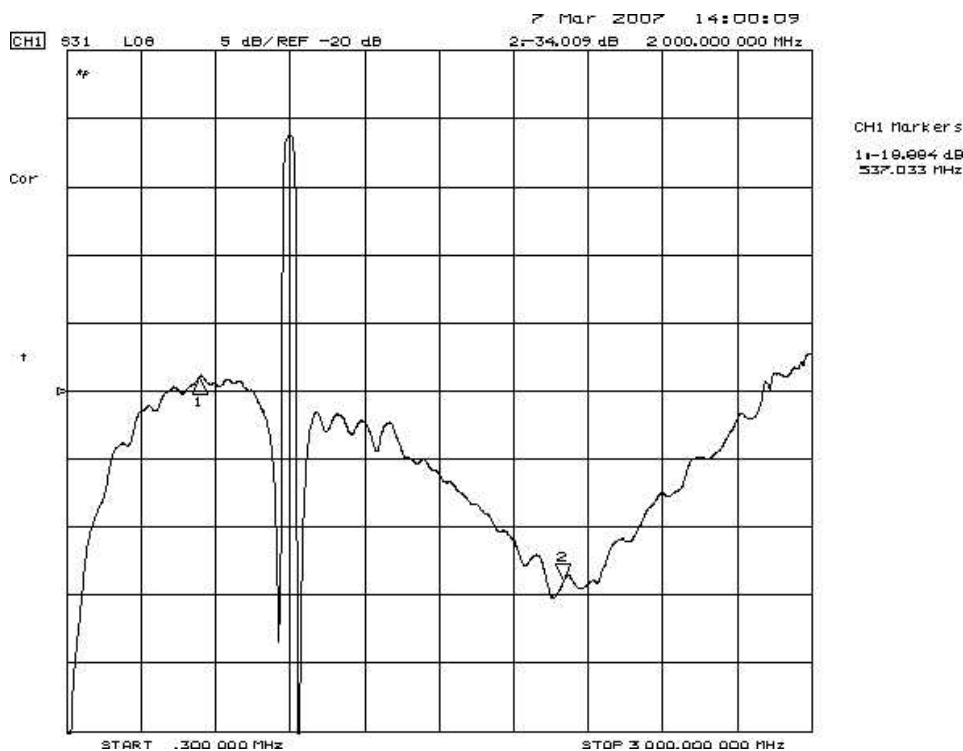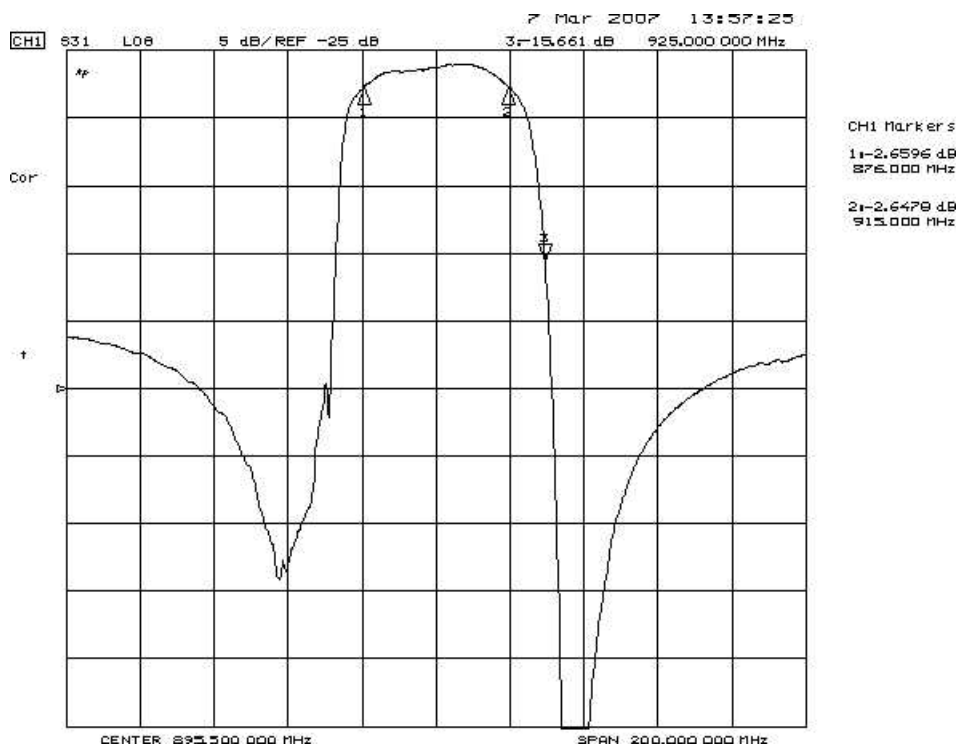


Reflections Functions :

S11 VSWR

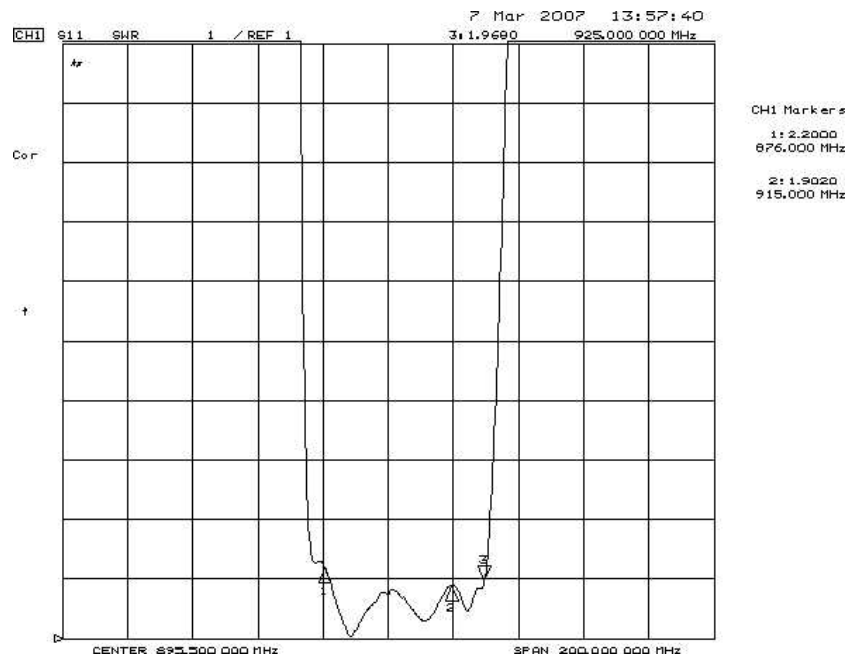


S22 VSWR

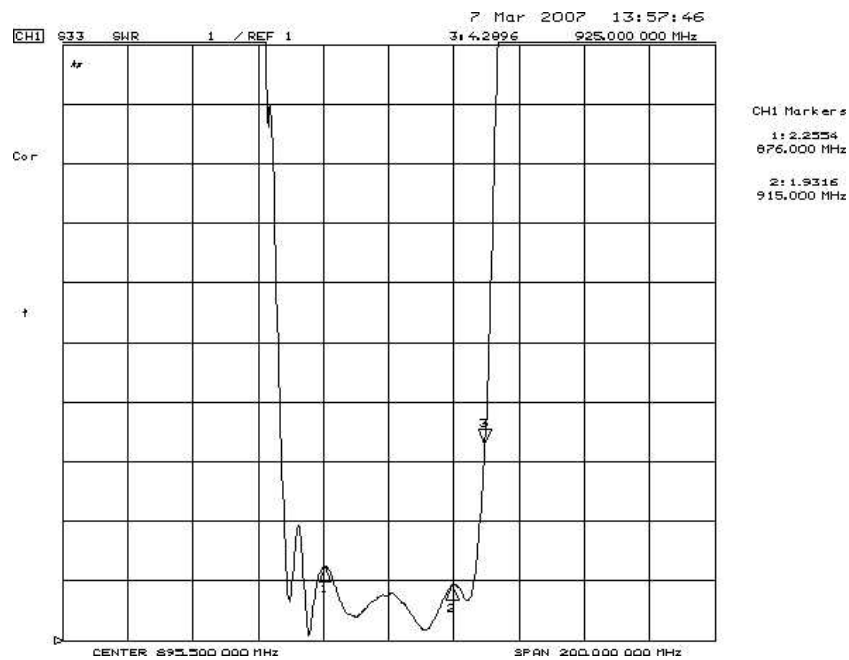


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=1000 ; 13"=3000)

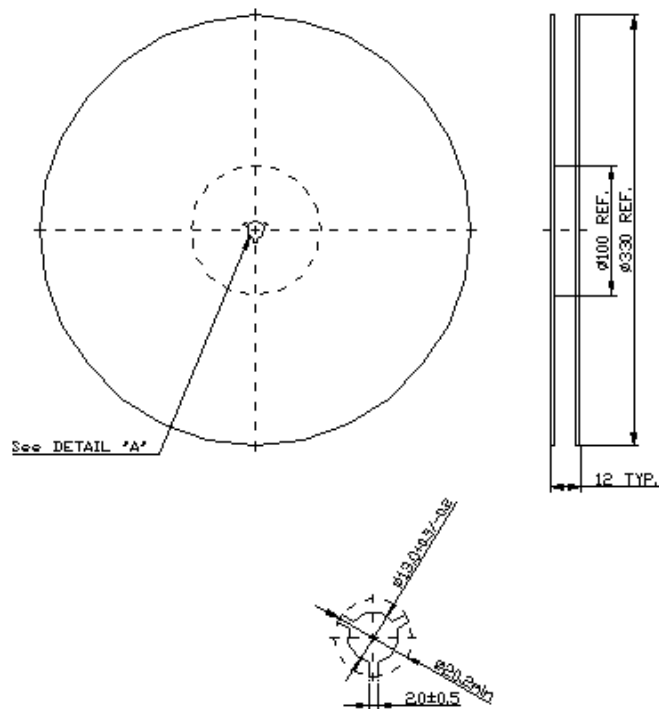

2. TAPE DIMENSION

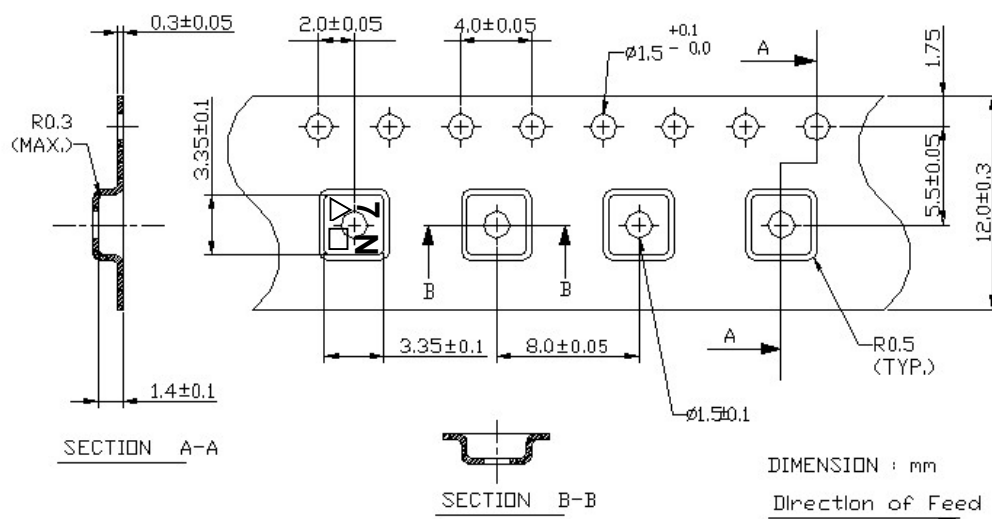

H. RECOMMENDED REFLOW PROFILE :

