



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Filter 1435MHz (BW 50MHz) SMD 3.0x3.0 mm

TST Parts No.:TA1654A

Customer Parts No.:_____


Customer signature required

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Andy Yu 

Approval by:_____ Bob Chau 

Date:_____ 2013/12/13

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1435MHz(BW 50MHz) SMD 3.0×3.0mm

MODEL NO.: TA1654A

REV. 1.0

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Terminating source impedance : $Z_s = 50 \Omega$

Terminating load impedance : $Z_L = 50 \Omega$


Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	1435	-	-
Max. Insertion Loss (1410 ~ 1460 MHz) IL	dB	-	4.2	5.0	-
Passband ripple (1410 ~ 1460 MHz)	dB	-	1.7	3.0	-
2dB BW BW	MHz	50	57	-	-
Group Delay Variation (1410 ~ 1460 MHz)	nsec		10	15	
VSWR (1410 ~ 1460 MHz)			1.6	2.4	
Source Impedance (single ended)	Ω	-	50	-	-
Load Impedance (single ended)	Ω	-	50	-	-
Attenuation					
D.C ~ 1360 MHz	dB	40	46	-	-
1360 ~ 1385 MHz	dB	20	42	-	-
1485 ~ 1565 MHz	dB	18	26	-	-
1565 ~ 2900 MHz	dB	40	43	-	-
Package size	mm	SMD 3.0x3.0			

C. Frequency Characteristics :


(1) S21 Response: (span 400MHz)

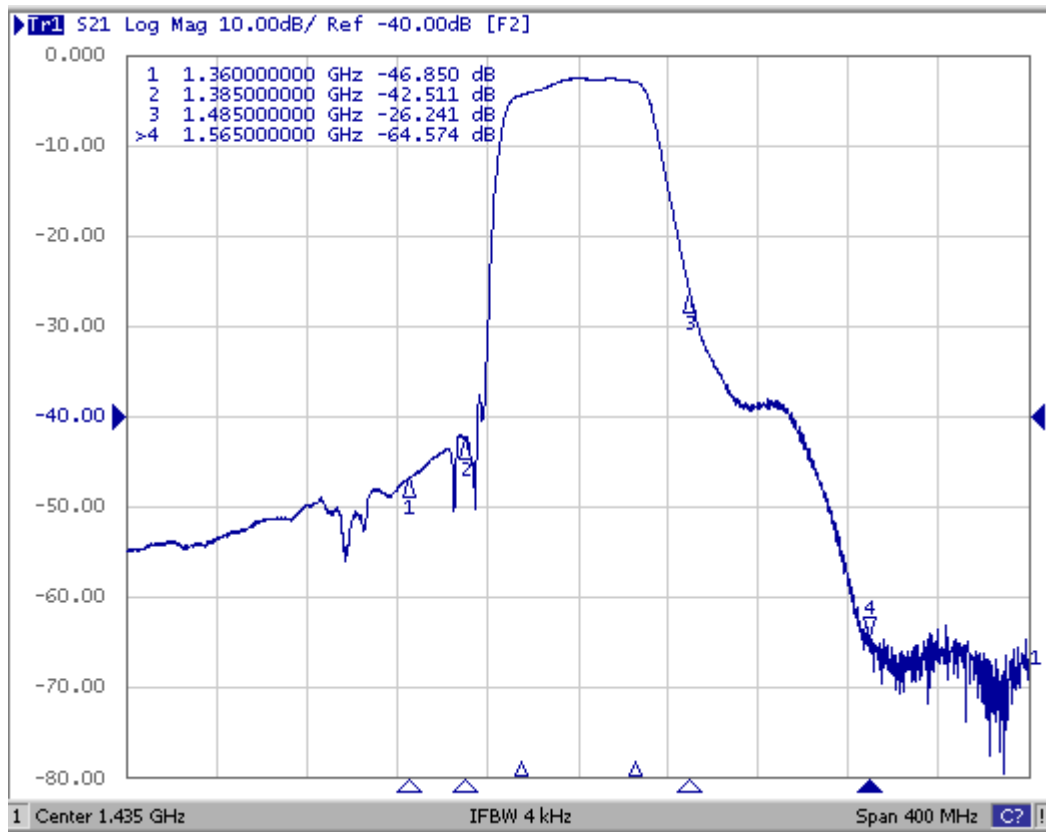

(2) Pass band Response:(span 120MHz)

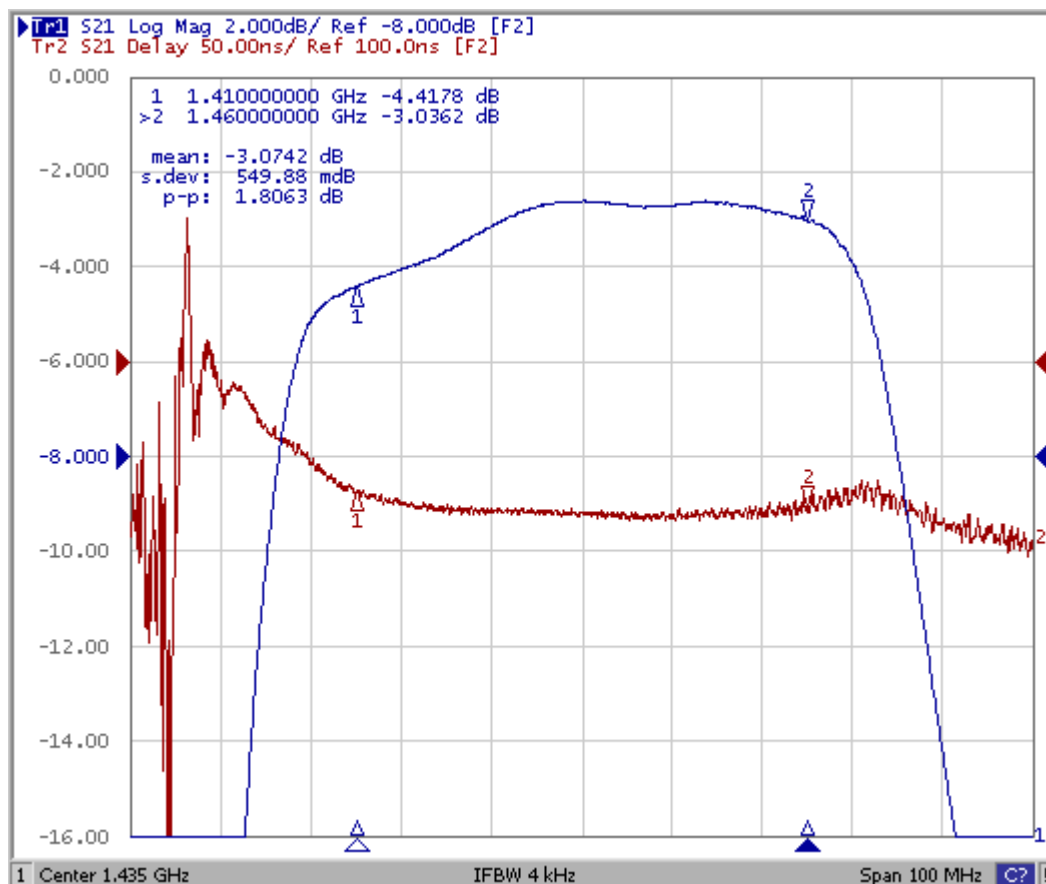


(3) S11 & S22 VSWR Response:(span 100MHz)

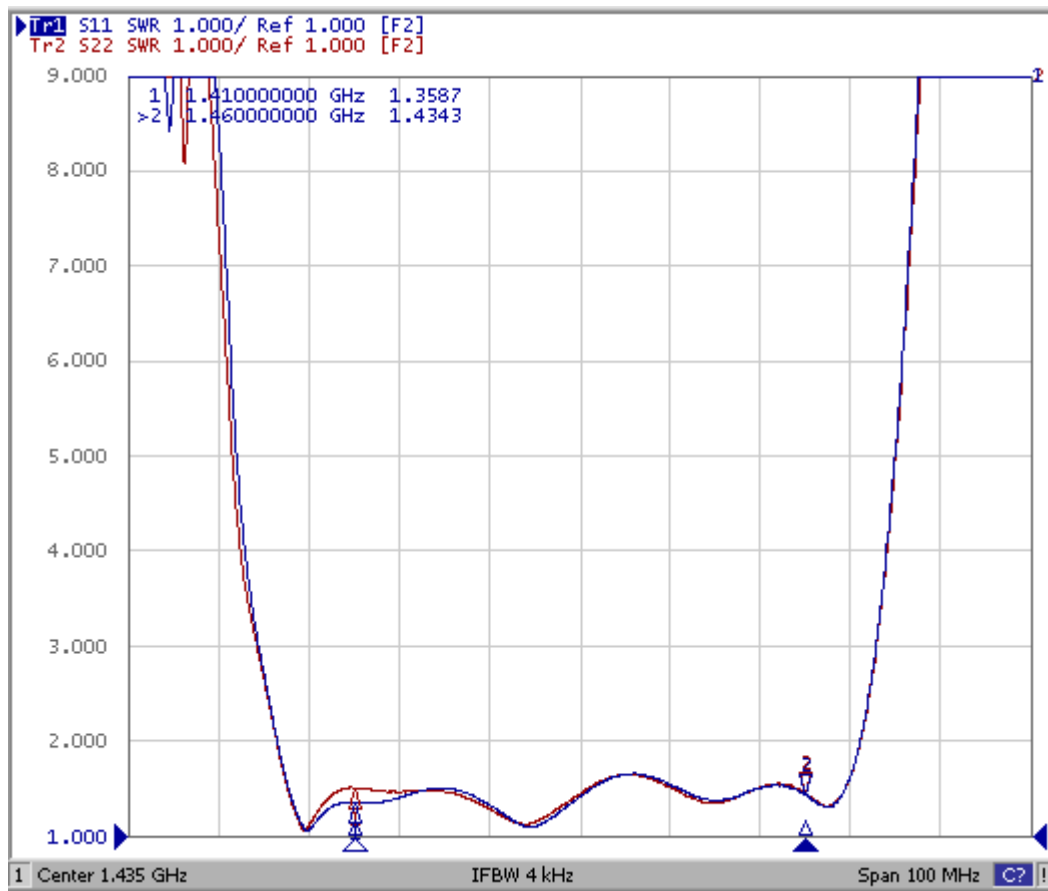


D. MEASUREMENT CIRCUIT:


TESTING ENVIRONMENT

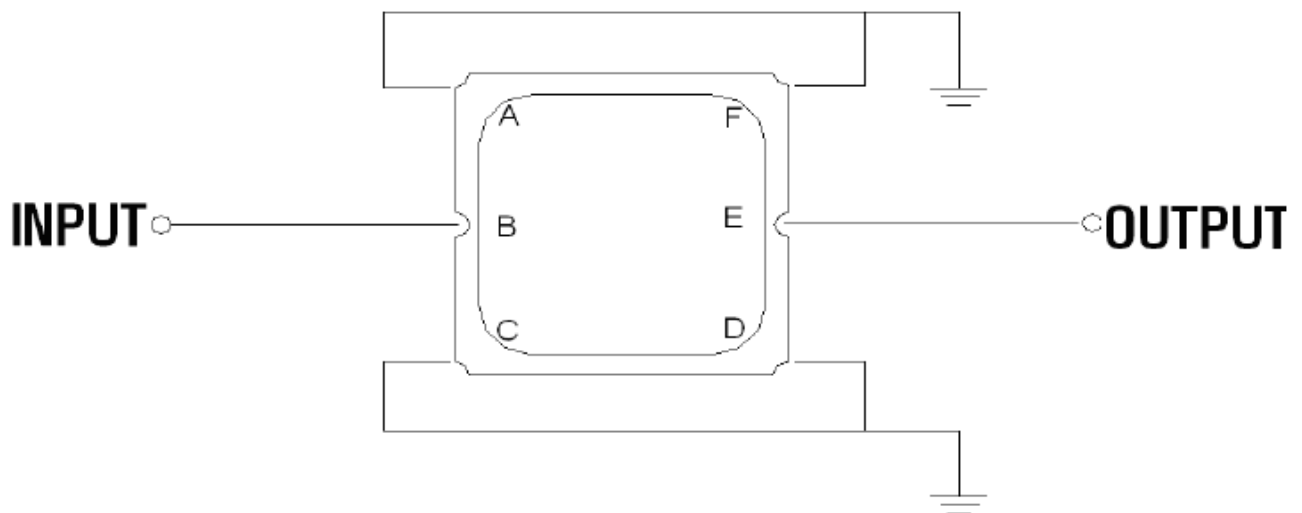

E.OUTLINE DRAWING:

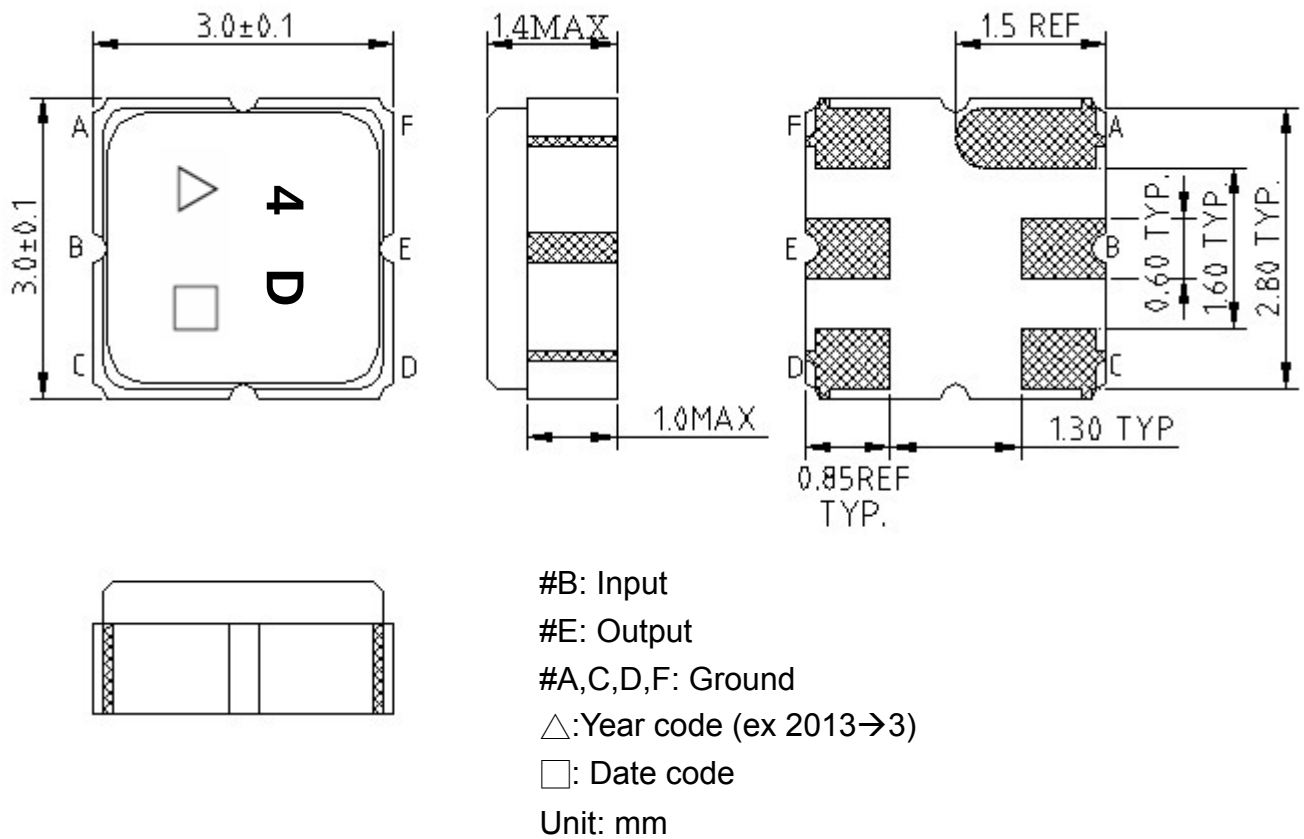


F. PCB FootPrint

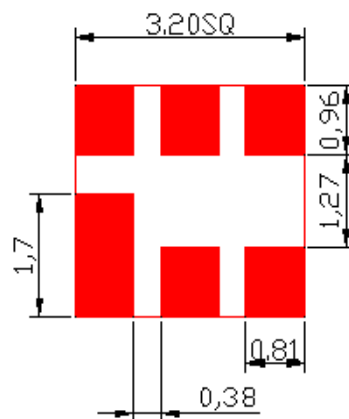


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

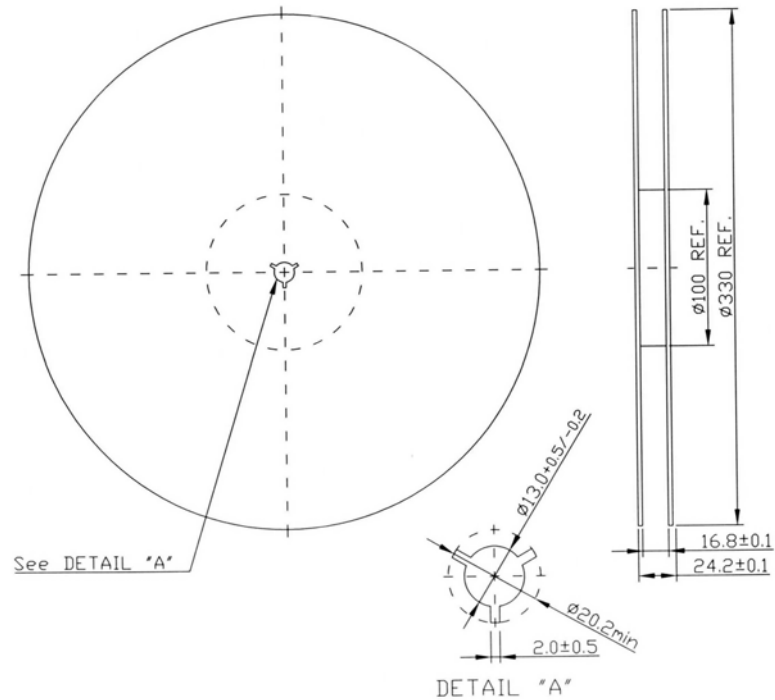

2. TAPE DIMENSION

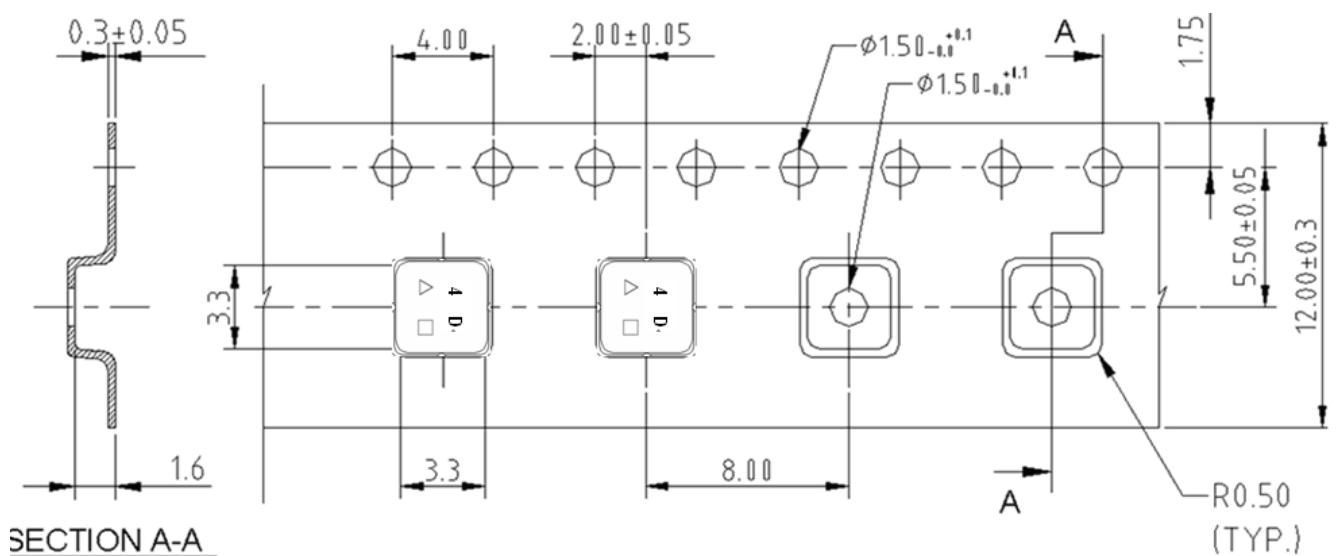

H. RECOMMENDED REFLOW PROFILE :

